



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
TMR-Pompano
Machine Id
17971 LIEBHERR A924C 957-33753
Component
Rear Differential
Fluid
GEAR OIL SAE 85W140 (3 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		DJJ0023224	DJJ0008218	LHMC68243
Sample Date		Client Info		03 Jul 2024	14 Jan 2021	25 Feb 2013
Machine Age	hrs	Client Info		0	9319	3026
Oil Age	hrs	Client Info		0	0	1000
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	Not Changd	Not Changd
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>380	121	20	28
Chromium	ppm	ASTM D5185m	>4	1	<1	<1
Nickel	ppm	ASTM D5185m	>5	<1	0	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m		0	<1	0
Aluminum	ppm	ASTM D5185m	>8	2	0	<1
Lead	ppm	ASTM D5185m	>5	1	0	2
Copper	ppm	ASTM D5185m	>25	10	2	2
Tin	ppm	ASTM D5185m	>4	<1	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	5	2	15
Potassium	ppm	ASTM D5185m	>20	125	1	<1
Water		WC Method	>.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		4	0	2
Boron	ppm	ASTM D5185m	400	186	349	3
Barium	ppm	ASTM D5185m	200	0	0	0
Molybdenum	ppm	ASTM D5185m	12	3	2	<1
Manganese	ppm	ASTM D5185m		2	<1	4
Magnesium	ppm	ASTM D5185m	12	7	6	<1
Calcium	ppm	ASTM D5185m	150	24	37	68
Phosphorus	ppm	ASTM D5185m	1650	1584	1930	2245
Zinc	ppm	ASTM D5185m	125	30	15	23
Sulfur	ppm	ASTM D5185m	22500	18790	19422	33567
Visc @ 40°C	cSt	ASTM D445	368	127	140	189.5

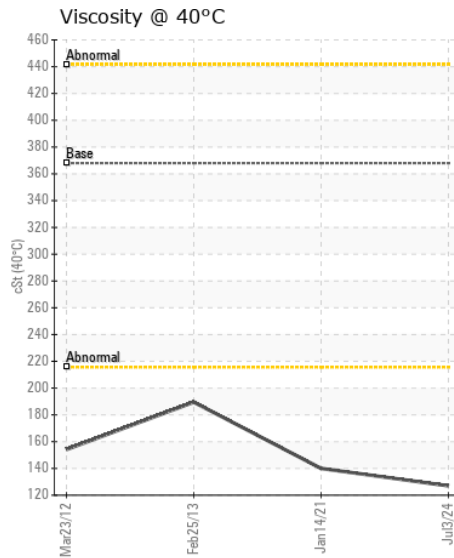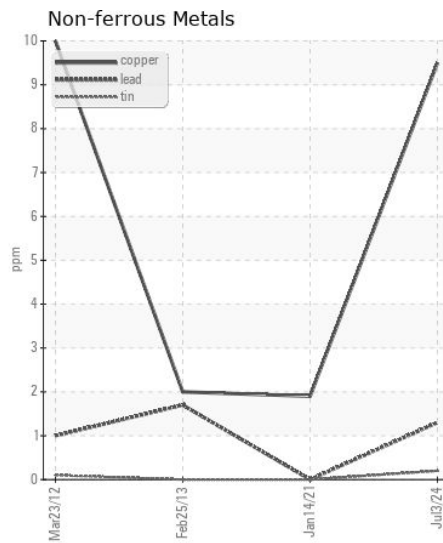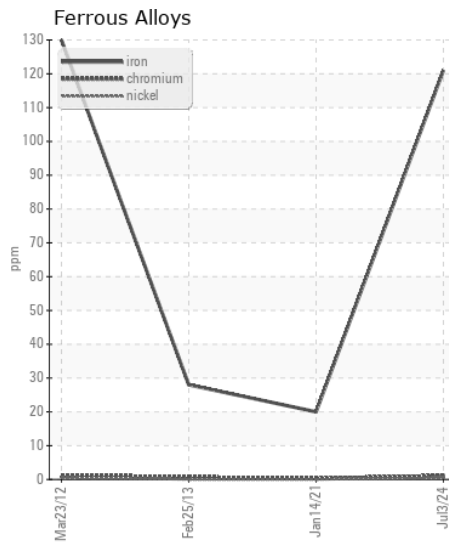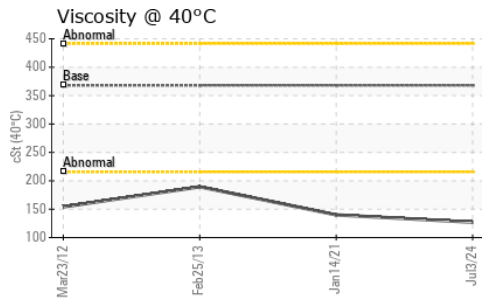

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : DJJ0023224
Lab Number : 06236527
Unique Number : 11125361
Test Package : CONST

Received : 15 Jul 2024
Tested : 16 Jul 2024
Diagnosed : 17 Jul 2024 - Sean Felton

TRADEMARK METALS RECYCLING - RIVIERA BEACH
 4661 DYER BLVD
 WEST PALM BEACH, FL
 US 33407
 Contact: RYAN BOWDEN

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
 F: (561)842-9526