



ASCENDUM

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
Ascendum Machinery
Machine Id
VOLVO L120H RL85 (S/N L120HV633471)
Component
Front Axle
Fluid
VOLVO WB 102 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ASC0008273	ASC0009929	ASC0007815
Sample Date		Client Info		11 Jul 2024	08 May 2024	14 Mar 2024
Machine Age	hrs	Client Info		2487	2013	1617
Oil Age	hrs	Client Info		474	2013	1617
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changed	Changed	Not Changed
Filter Changed		Client Info		Not Changed	Changed	Not Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	45	145	135
Chromium	ppm	ASTM D5185m	>20	<1	3	3
Nickel	ppm	ASTM D5185m	>10	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>30	<1	0	<1
Lead	ppm	ASTM D5185m	>50	0	0	0
Copper	ppm	ASTM D5185m	>120	0	0	0
Tin	ppm	ASTM D5185m	>20	0	<1	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	13	21	19
Potassium	ppm	ASTM D5185m	>20	<1	0	0
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	MODER	MODER
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		4	11	10
Boron	ppm	ASTM D5185m		125	141	119
Barium	ppm	ASTM D5185m		0	1	0
Molybdenum	ppm	ASTM D5185m		1	12	14
Manganese	ppm	ASTM D5185m		2	10	9
Magnesium	ppm	ASTM D5185m		0	12	11
Calcium	ppm	ASTM D5185m		3750	3880	4034
Phosphorus	ppm	ASTM D5185m		1237	1387	1329
Zinc	ppm	ASTM D5185m		1448	1609	1613
Sulfur	ppm	ASTM D5185m		3910	4445	4546
Visc @ 40°C	cSt	ASTM D445	55	41.5	42.6	40.7

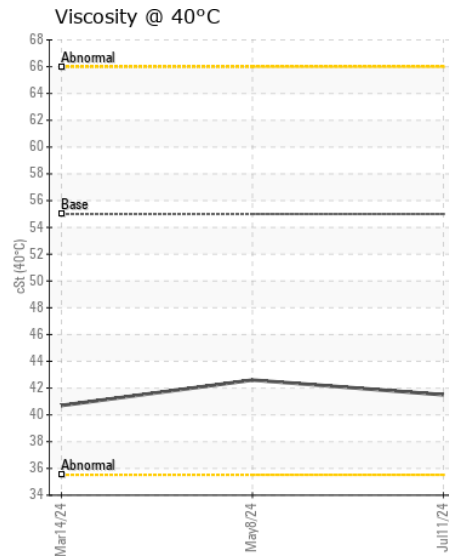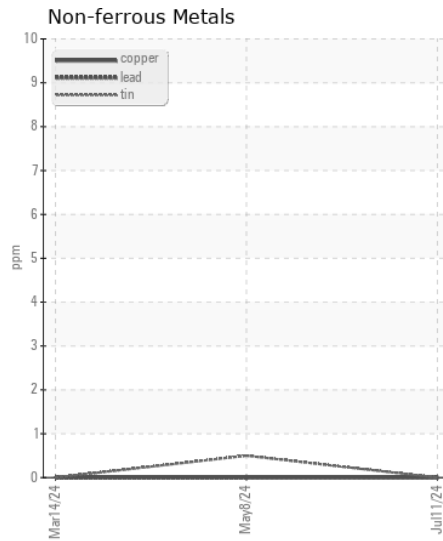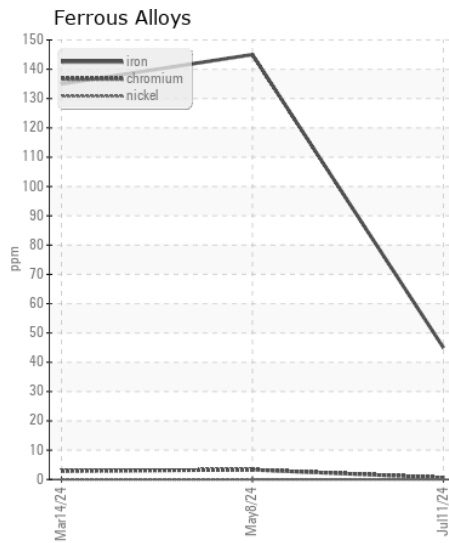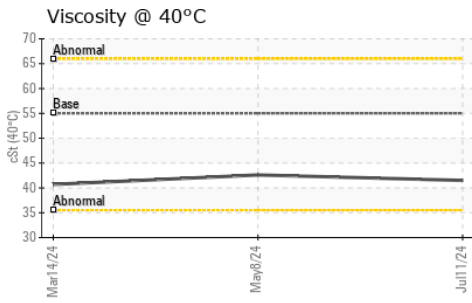

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : ASC0008273

Lab Number : 06236598

Unique Number : 11125432

Test Package : CONST

Received : 15 Jul 2024

Tested : 16 Jul 2024

Diagnosed : 16 Jul 2024 - Wes Davis

HILCO TRANSPORT

7700 KENMONT RD

GREENSBORO, NC

US 27409

Contact: MIKE LAUGHEAD

mlaughead@hilcotransport.com

T: (336)273-9441

F: (336)273-9701

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)