



# ASCENDUM

## OIL ANALYSIS REPORT

WEAR **NORMAL**

CONTAMINATION **NORMAL**

FLUID CONDITION **NORMAL**



Area

**Ascendum Machinery**

Machine Id

**VOLVO A30G 753667**

Component

**Rear Left Final Drive**

Fluid

**VOLVO SUPER GEAR OIL 75W-80-GO102 (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ASC0008363	---	---
Sample Date		Client Info		11 Jul 2024	---	---
Machine Age	hrs	Client Info		517	---	---
Oil Age	hrs	Client Info		517	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Not Changd	---	---
Filter Changed		Client Info		None	---	---
Sample Status				NORMAL	---	---

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>900	108	---	---
Chromium	ppm	ASTM D5185m	>20	3	---	---
Nickel	ppm	ASTM D5185m	>10	<1	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>30	0	---	---
Lead	ppm	ASTM D5185m	>50	0	---	---
Copper	ppm	ASTM D5185m	>150	8	---	---
Tin	ppm	ASTM D5185m	>20	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

### CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	5	---	---
Potassium	ppm	ASTM D5185m	>20	5	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	*Visual	NONE	MODER	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		3	---	---
Boron	ppm	ASTM D5185m		259	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		4	---	---
Manganese	ppm	ASTM D5185m		8	---	---
Magnesium	ppm	ASTM D5185m		0	---	---
Calcium	ppm	ASTM D5185m		634	---	---
Phosphorus	ppm	ASTM D5185m		1312	---	---
Zinc	ppm	ASTM D5185m		263	---	---
Sulfur	ppm	ASTM D5185m		21516	---	---
Visc @ 40°C	cSt	ASTM D445		93.0	---	---

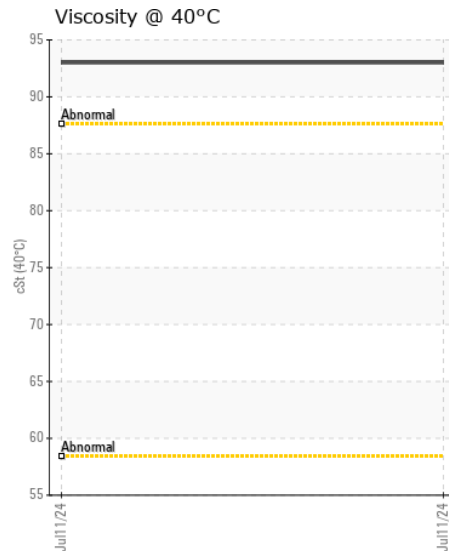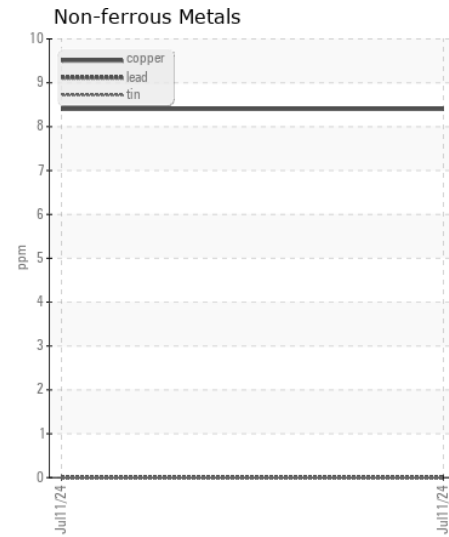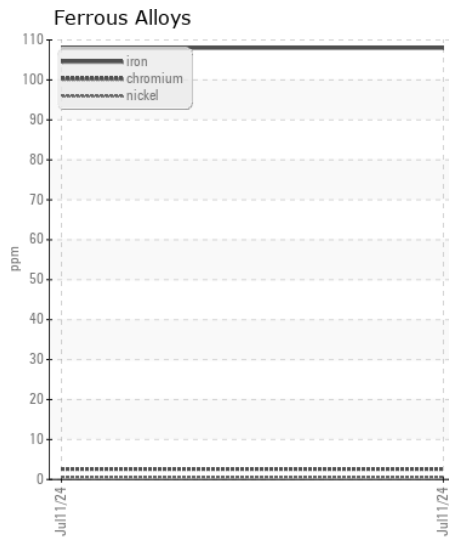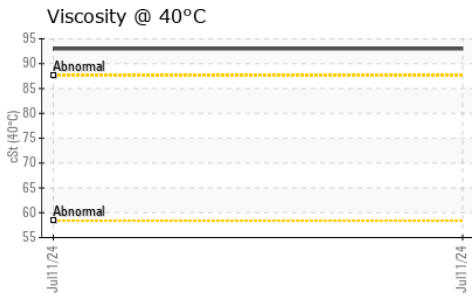

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : ASC0008363  
**Lab Number** : 06236605  
**Unique Number** : 11125439  
**Test Package** : CONST

**Received** : 15 Jul 2024  
**Tested** : 16 Jul 2024  
**Diagnosed** : 17 Jul 2024 - Sean Felton

**WM WARR & SON**  
 3800 SMITH FARM RD  
 MATTHEWS, NC  
 US 28104

Contact: SERVICE MANAGER

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: