



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[A13026]
Machine Id
VOLVO A30D 12130
Component
Transmission (Auto)
Fluid
MOBIL AT 102 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP445255	VCP406690	VCP335654
Sample Date		Client Info		11 Jul 2024	16 Jun 2023	18 Oct 2021
Machine Age	hrs	Client Info		11045	10365	9890
Oil Age	hrs	Client Info		500	500	1000
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changd	Not Changd	Changed
Filter Changed		Client Info		Not Changd	Not Changd	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>160	14	11	14
Chromium	ppm	ASTM D5185m	>5	0	0	<1
Nickel	ppm	ASTM D5185m	>5	<1	<1	<1
Titanium	ppm	ASTM D5185m		0	0	<1
Silver	ppm	ASTM D5185m	>5	0	0	<1
Aluminum	ppm	ASTM D5185m	>50	7	4	4
Lead	ppm	ASTM D5185m	>50	1	2	2
Copper	ppm	ASTM D5185m	>225	81	57	110
Tin	ppm	ASTM D5185m	>10	2	2	3
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	3	3	2
Potassium	ppm	ASTM D5185m	>20	<1	2	<1
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		7	2	5
Boron	ppm	ASTM D5185m		80	87	84
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	3
Manganese	ppm	ASTM D5185m		0	<1	<1
Magnesium	ppm	ASTM D5185m		0	7	12
Calcium	ppm	ASTM D5185m		115	135	222
Phosphorus	ppm	ASTM D5185m		197	201	231
Zinc	ppm	ASTM D5185m		6	31	58
Sulfur	ppm	ASTM D5185m		1964	1927	1703
Visc @ 40°C	cSt	ASTM D445		22.2	28.3	27.4

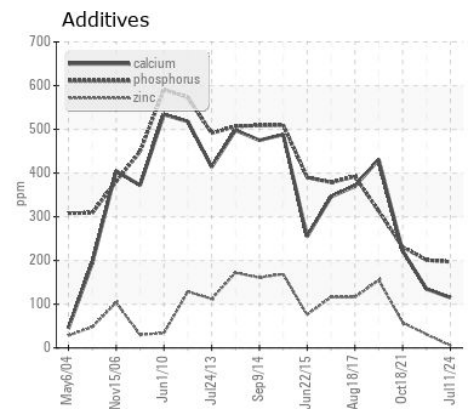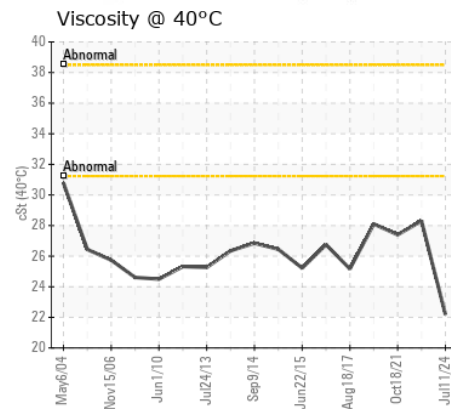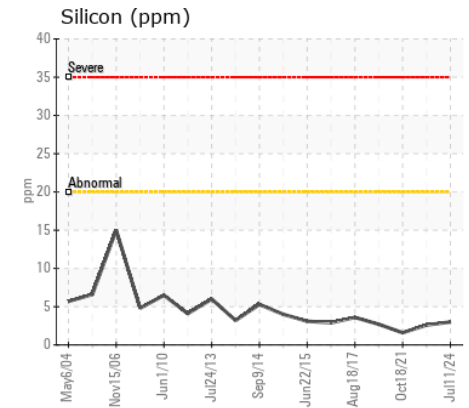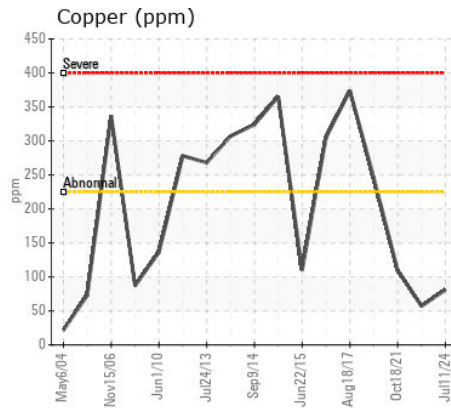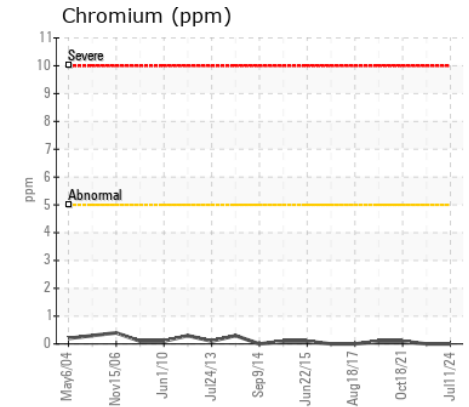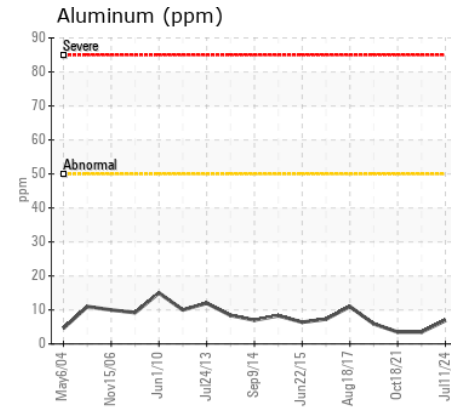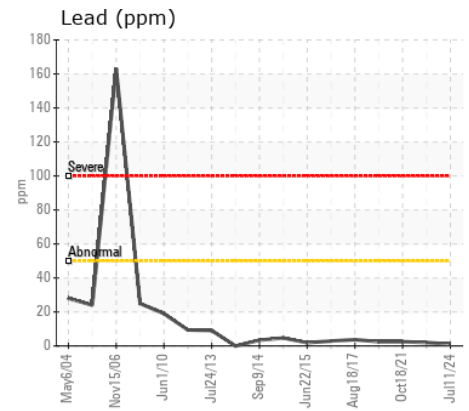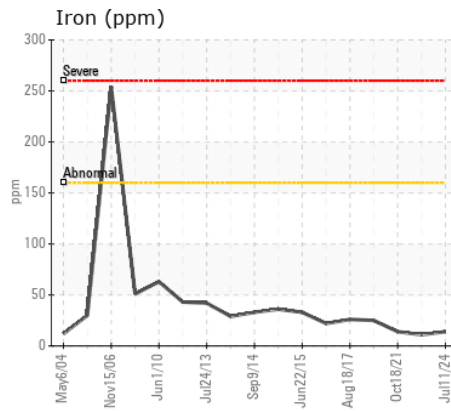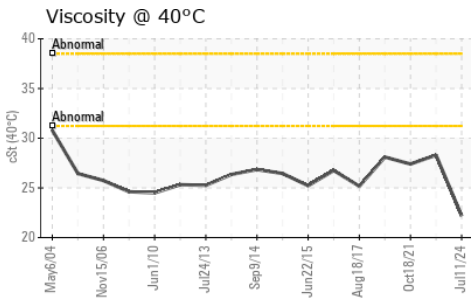

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : VCP445255

Lab Number : 06236662

Unique Number : 11125496

Test Package : MOB 1

Received : 15 Jul 2024

Tested : 17 Jul 2024

Diagnosed : 17 Jul 2024 - Don Baldrige

DYER QUARRY
P.O. BOX 188, 1275 ROCK HOLLOW ROAD

BIRDSBORO, PA

US 19508

Contact: MATT MCCLELLAND

matt.mcclelland@dyerquarry.com

T:

F: (610)582-2304

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)