



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area

[W02008503]

Machine Id

VOLVO EC350 314337

Component

Hydraulic System

Fluid

VOLVO HYDRAULIC OIL ULTRA 46 (65 GAL)

RECOMMENDATION

Resample at the next service interval to monitor. (Customer Sample Comment: W02008503)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ML0002331	---	---
Sample Date		Client Info		12 Jul 2024	---	---
Machine Age	hrs	Client Info		2021	---	---
Oil Age	hrs	Client Info		2021	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>25	3	---	---
Chromium	ppm	ASTM D5185m	>10	0	---	---
Nickel	ppm	ASTM D5185m	>10	0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>20	<1	---	---
Lead	ppm	ASTM D5185m	>20	0	---	---
Copper	ppm	ASTM D5185m	>150	16	---	---
Tin	ppm	ASTM D5185m	>10	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION










The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	4	---	---
Potassium	ppm	ASTM D5185m	>20	0	---	---
Water		WC Method	>0.1	NEG	---	---
Particles >4µm		ASTM D7647	>40000	1056	---	---
Particles >6µm		ASTM D7647	>10000	378	---	---
Particles >14µm		ASTM D7647	>2500	25	---	---
Particles >21µm		ASTM D7647	>640	4	---	---
Particles >38µm		ASTM D7647	>160	1	---	---
Particles >71µm		ASTM D7647	>40	0	---	---
Oil Cleanliness		ISO 4406 (c)	>22/20/18	17/16/12	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		1	---	---
Boron	ppm	ASTM D5185m		0	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		2	---	---
Manganese	ppm	ASTM D5185m		0	---	---
Magnesium	ppm	ASTM D5185m		3	---	---
Calcium	ppm	ASTM D5185m		148	---	---
Phosphorus	ppm	ASTM D5185m		415	---	---
Zinc	ppm	ASTM D5185m		523	---	---
Sulfur	ppm	ASTM D5185m		1224	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045		0.51	---	---
Visc @ 40°C	cSt	ASTM D445	46	42.2	---	---

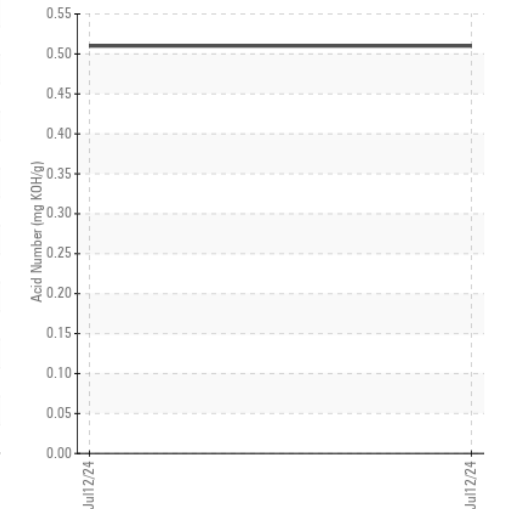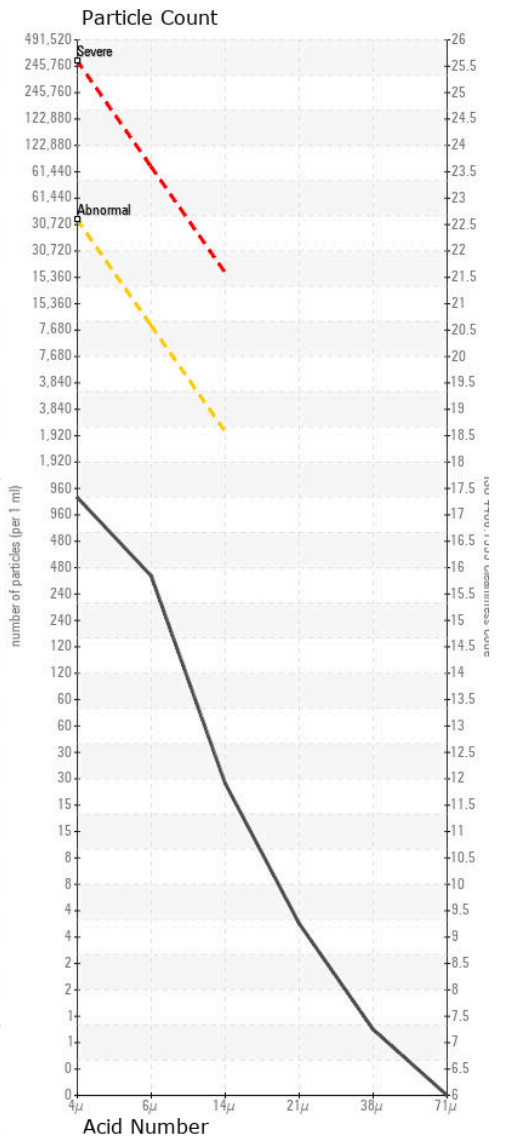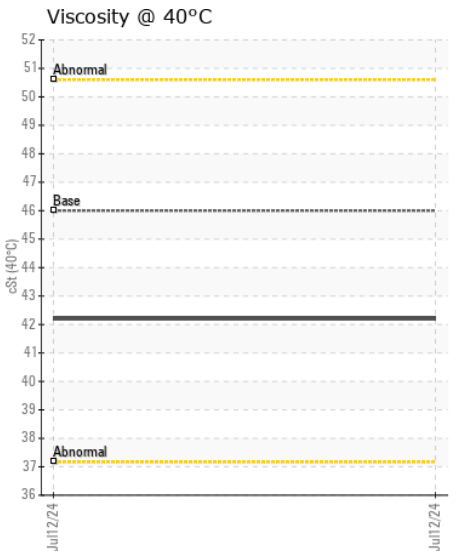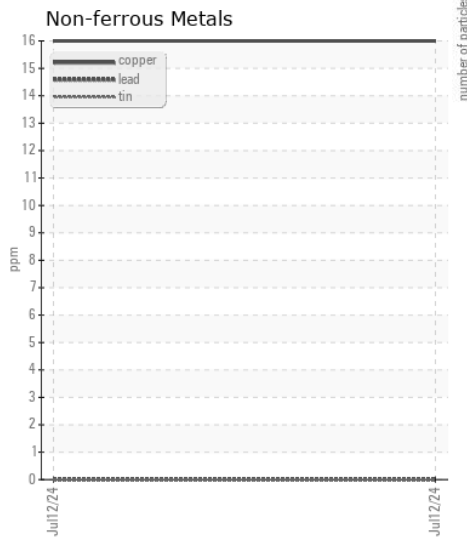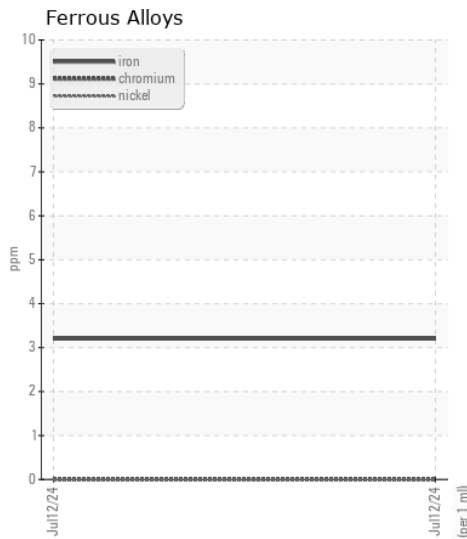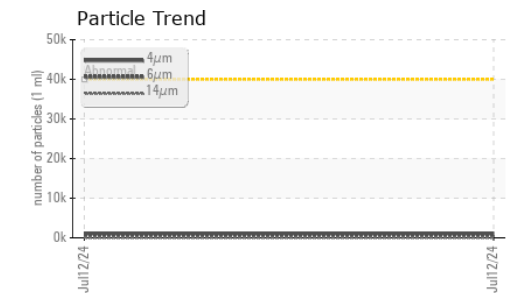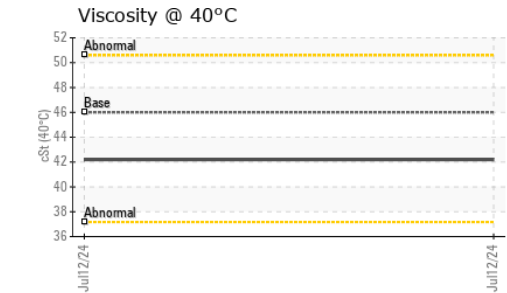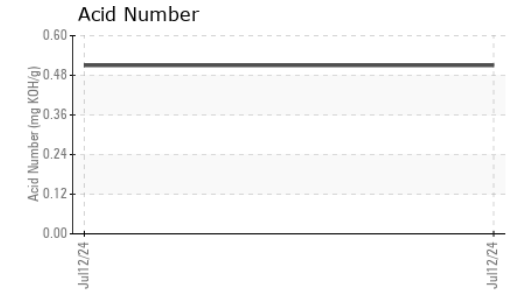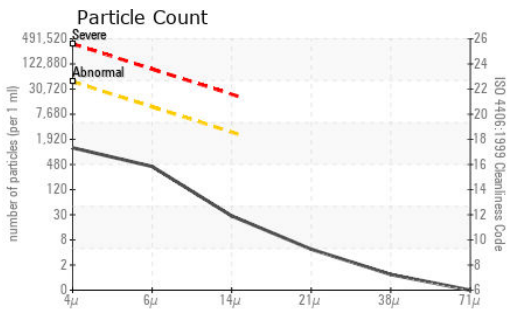

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ML0002331
Lab Number : 06236773
Unique Number : 11125607
Test Package : CONST

Received : 15 Jul 2024
Tested : 17 Jul 2024
Diagnosed : 17 Jul 2024 - Don Baldrige

MCCLUNG-LOGAN EQUIPMENT CO - MANASSAS
 8450 QUARRY ROAD
 MANASSAS, VA
 US 20110

Contact: DARRELL ANDES
 dandes@mcclung-logan.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
 F: (703)393-7844