



LUBE PLUS+

OIL ANALYSIS REPORT

WEAR	ABNORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
KOMATSU HD465-5 60 (S/N 4963)
Component
Right Final Drive
Fluid
SAE 30W (--- GAL)

RECOMMENDATION

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

WEAR

The copper level is abnormal. All other component wear rates are normal.

CONTAMINATION












There is no indication of any contamination in the oil.

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LP0001353	---	---
Sample Date		Client Info		01 Jul 2024	---	---
Machine Age	hrs	Client Info		31680	---	---
Oil Age	hrs	Client Info		1412	---	---
Filter Age	hrs	Client Info		1412	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				ABNORMAL	---	---
Iron	ppm	ASTM D5185m	>500	20	---	---
Chromium	ppm	ASTM D5185m	>10	<1	---	---
Nickel	ppm	ASTM D5185m	>10	0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>25	3	---	---
Lead	ppm	ASTM D5185m	>25	0	---	---
Copper	ppm	ASTM D5185m	>50	▲ 73	---	---
Tin	ppm	ASTM D5185m	>10	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Silicon	ppm	ASTM D5185m	>75	6	---	---
Potassium	ppm	ASTM D5185m	>20	1	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---
Sodium	ppm	ASTM D5185m		0	---	---
Boron	ppm	ASTM D5185m		27	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		9	---	---
Manganese	ppm	ASTM D5185m		0	---	---
Magnesium	ppm	ASTM D5185m		304	---	---
Calcium	ppm	ASTM D5185m		2170	---	---
Phosphorus	ppm	ASTM D5185m		1134	---	---
Zinc	ppm	ASTM D5185m		1151	---	---
Sulfur	ppm	ASTM D5185m		4536	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045		1.36	---	---
Visc @ 40°C	cSt	ASTM D445	95.0	53.2	---	---

▲ Non-ferrous Metals

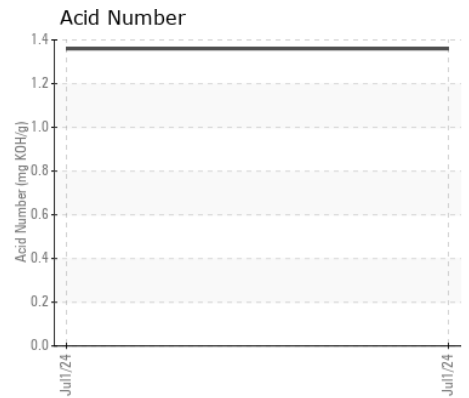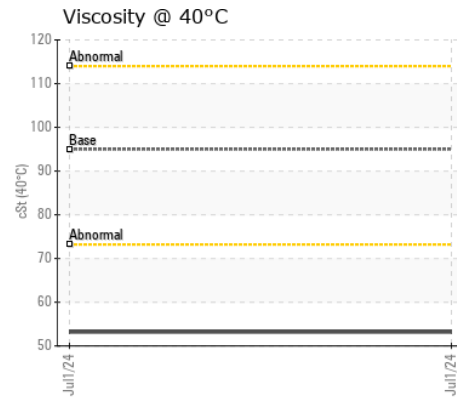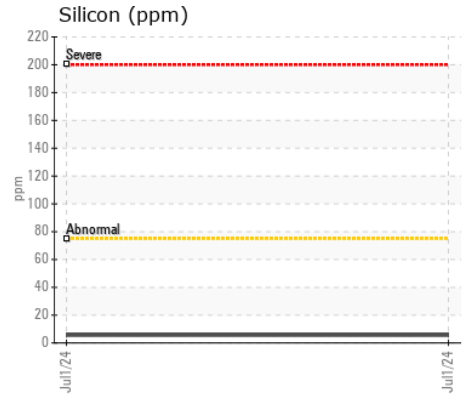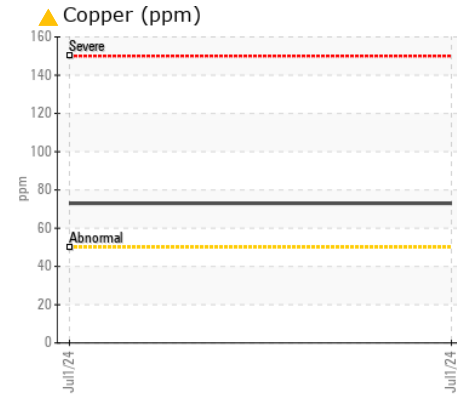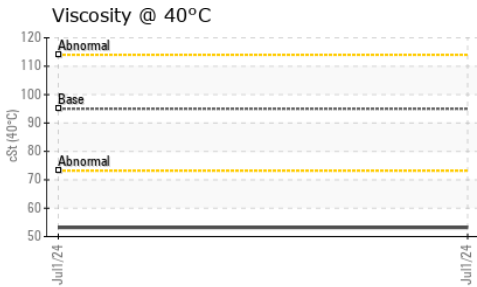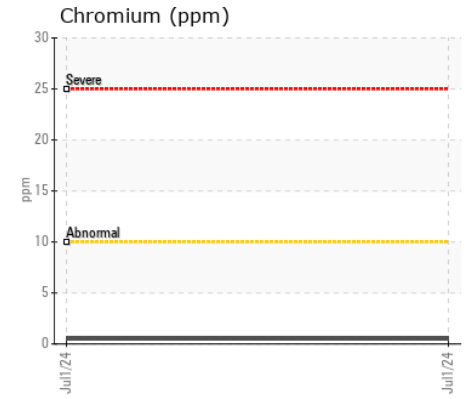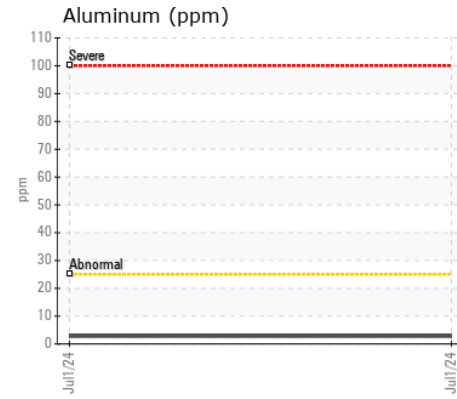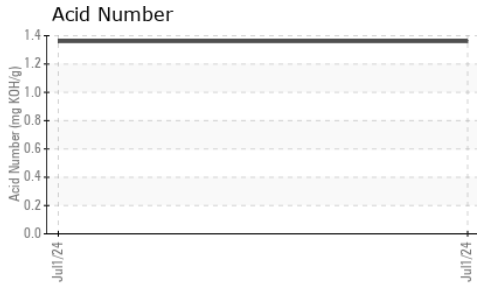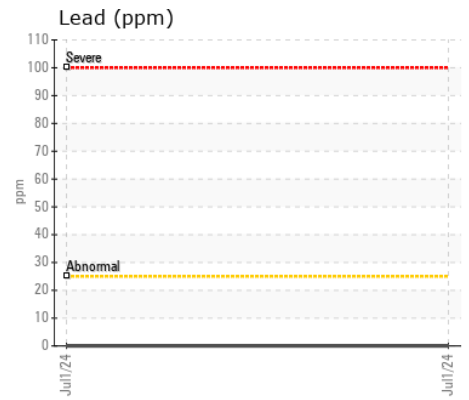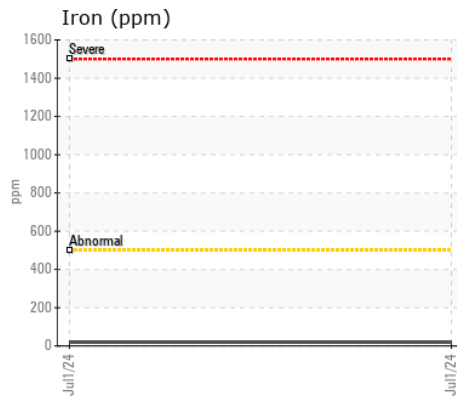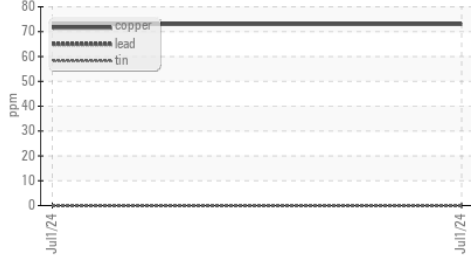

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LP0001353
Lab Number : 06237011
Unique Number : 11125845
Test Package : MOB 2
Received : 15 Jul 2024
Tested : 17 Jul 2024
Diagnosed : 17 Jul 2024 - Sean Felton

S.M. LORUSSO & SONS
 221 NORFOLK ST.
 WALPOLE, MA
 US 02081
 Contact: PAUL BECKMAN
 pbeckman@smlorusso.com
 T: (508)668-2603
 F: (508)660-0232

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)