



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
JAMES E ANDERSON
Machine Id
[JAMES E ANDERSON] 004 502590-4
Component
Port Reduction Gear
Fluid
CHEVRON MEROPA 320 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		MW0073589	MWM690509	MWM690564
Sample Date		Client Info		30 Jun 2024	01 Jul 2023	01 Mar 2019
Machine Age	hrs	Client Info		65118	64153	145555
Oil Age	hrs	Client Info		0	64153	62711
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>150	84	79	44
Chromium	ppm	ASTM D5185m	>10	5	5	2
Nickel	ppm	ASTM D5185m	>10	<1	1	0
Titanium	ppm	ASTM D5185m		<1	<1	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	3	7	1
Lead	ppm	ASTM D5185m	>100	88	86	48
Copper	ppm	ASTM D5185m	>50	15	17	12
Tin	ppm	ASTM D5185m	>10	<1	2	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	LIGHT	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	6	7	3
Potassium	ppm	ASTM D5185m	>20	2	8	3
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		7	8	7
Boron	ppm	ASTM D5185m	20	14	16	11
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m	0	0	<1	0
Manganese	ppm	ASTM D5185m		0	3	<1
Magnesium	ppm	ASTM D5185m		1	0	0
Calcium	ppm	ASTM D5185m	25	0	20	2
Phosphorus	ppm	ASTM D5185m	235	270	289	205
Zinc	ppm	ASTM D5185m		23	12	6
Sulfur	ppm	ASTM D5185m		11364	16233	9544
Acid Number (AN)	mg KOH/g	ASTM D8045	0.56	0.82	0.87	0.990
Visc @ 40°C	cSt	ASTM D445	304	275	292	281.3

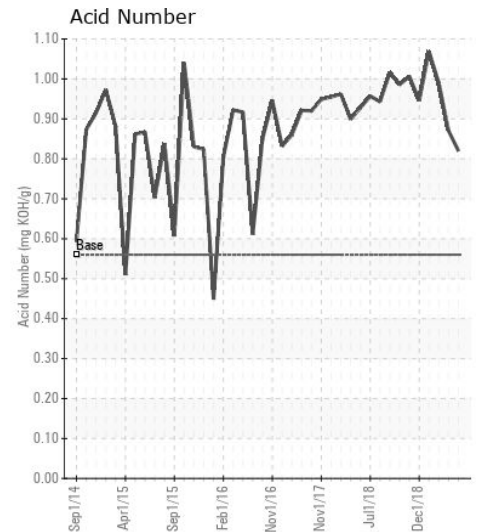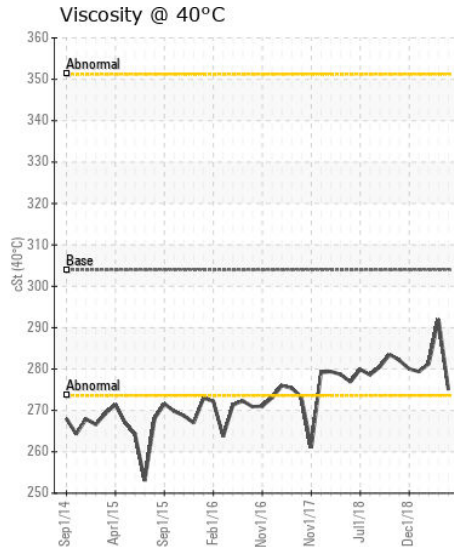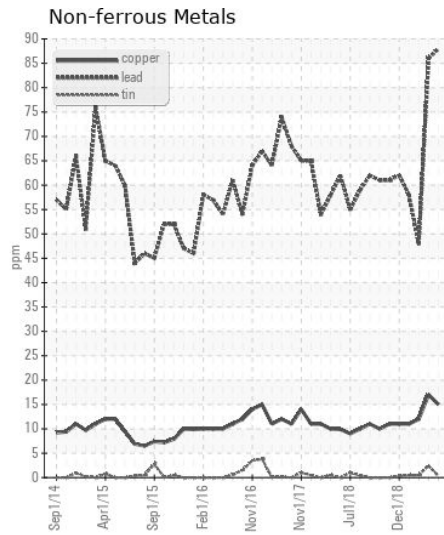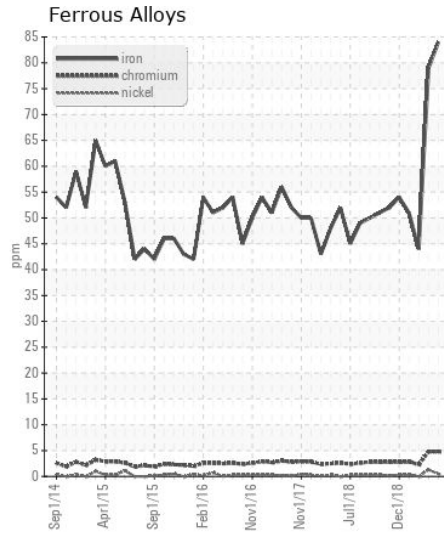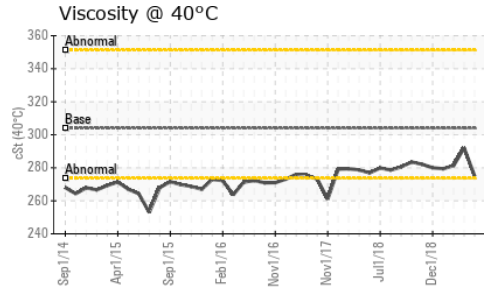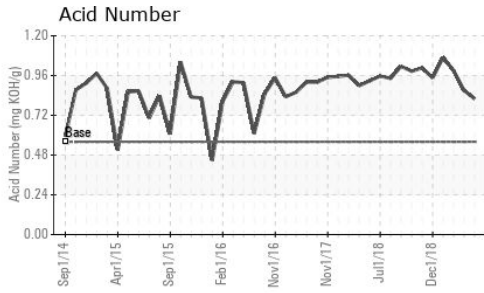

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : MW0073589

Lab Number : 06237040

Unique Number : 11125874

Test Package : MAR 2

Received : 15 Jul 2024

Tested : 17 Jul 2024

Diagnosed : 17 Jul 2024 - Wes Davis

INGRAM BARGE

900 S 3RD ST

PADUCAH, KY

US 42003

Contact: DALE MORIE

dale.morie@ingrambarga.com

T: (270)415-4467

F: (615)695-3697

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)