



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
NEWFLYER 2032
Component
Diesel Engine
Fluid
{not provided} (28 QTS)

RECOMMENDATION

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is SAE 40 Diesel Engine Oil. Please confirm the oil type and grade, and specify the brand of the oil on your next sample.

WEAR

All component wear rates are normal.












CONTAMINATION

There is no indication of any contamination in the oil.

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LP0001878	LP0001975	---
Sample Date		Client Info		11 Jul 2024	23 May 2024	---
Machine Age	mls	Client Info		184573	178828	---
Oil Age	mls	Client Info		184573	178828	---
Filter Age	mls	Client Info		0	0	---
Oil Changed		Client Info		N/A	N/A	---
Filter Changed		Client Info		N/A	N/A	---
Sample Status				NORMAL	NORMAL	---
Iron	ppm	ASTM D5185m	>75	9	7	---
Chromium	ppm	ASTM D5185m	>5	<1	<1	---
Nickel	ppm	ASTM D5185m	>4	0	<1	---
Titanium	ppm	ASTM D5185m	>2	0	<1	---
Silver	ppm	ASTM D5185m	>2	0	1	---
Aluminum	ppm	ASTM D5185m	>15	4	3	---
Lead	ppm	ASTM D5185m	>25	0	<1	---
Copper	ppm	ASTM D5185m	>100	1	2	---
Tin	ppm	ASTM D5185m	>4	0	<1	---
Vanadium	ppm	ASTM D5185m		0	<1	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---
Silicon	ppm	ASTM D5185m	>25	5	4	---
Potassium	ppm	ASTM D5185m	>20	2	2	---
Fuel		WC Method	>3.0	<1.0	<1.0	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>6	0.5	0.4	---
Nitration	Abs/cm	*ASTM D7624	>20	9.0	8.6	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.3	20.0	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---
Sodium	ppm	ASTM D5185m		6	4	---
Boron	ppm	ASTM D5185m		17	12	---
Barium	ppm	ASTM D5185m		0	0	---
Molybdenum	ppm	ASTM D5185m		33	25	---
Manganese	ppm	ASTM D5185m		0	<1	---
Magnesium	ppm	ASTM D5185m		42	26	---
Calcium	ppm	ASTM D5185m		2730	1990	---
Phosphorus	ppm	ASTM D5185m		1095	786	---
Zinc	ppm	ASTM D5185m		1371	973	---
Sulfur	ppm	ASTM D5185m		4165	3277	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	13.9	13.7	---
Base Number (BN)	mg KOH/g	ASTM D2896		6.00	6.90	---
Visc @ 100°C	cSt	ASTM D445		14.1	14.37	---

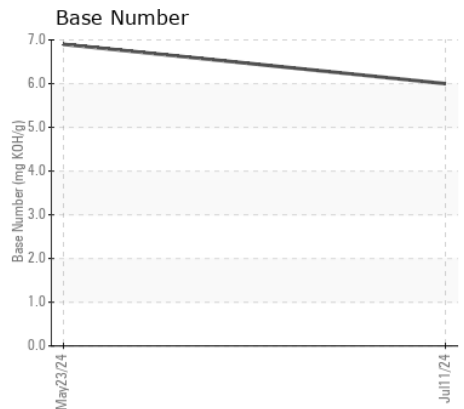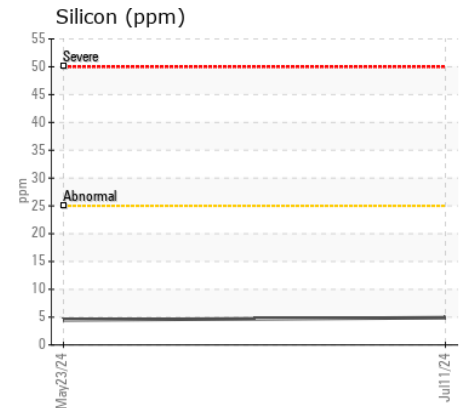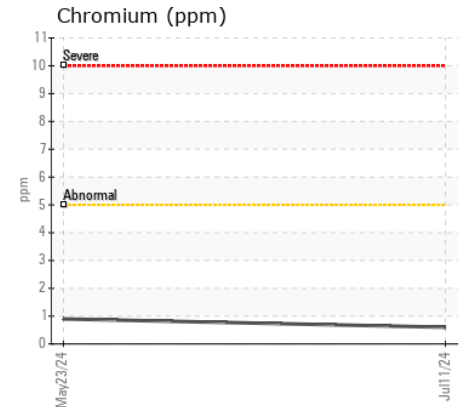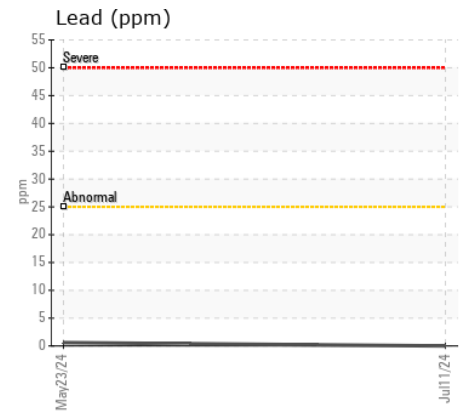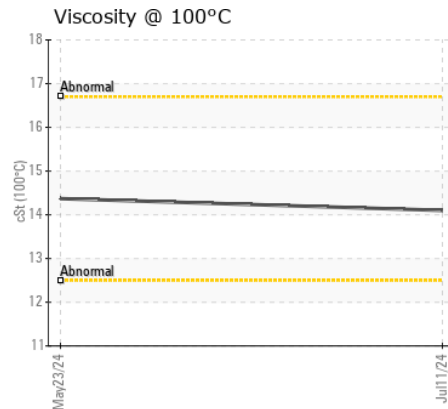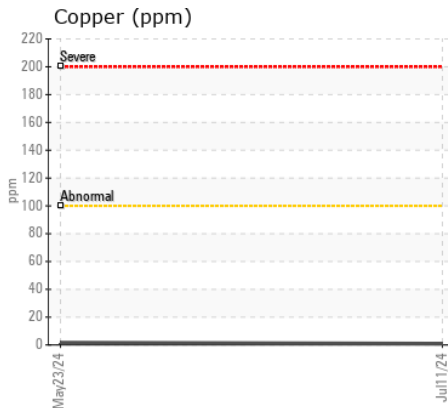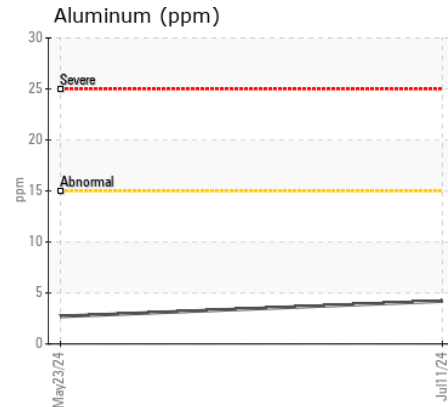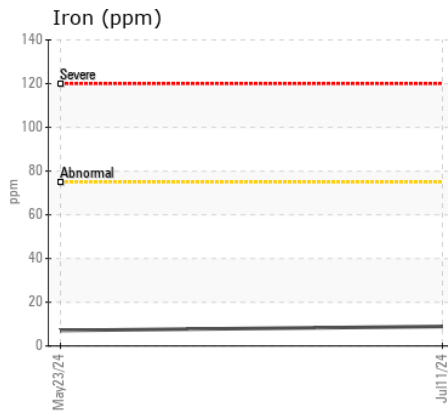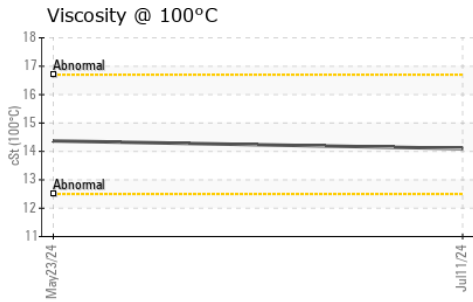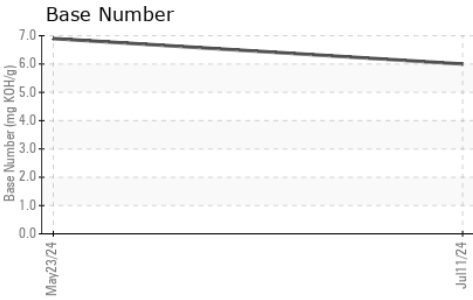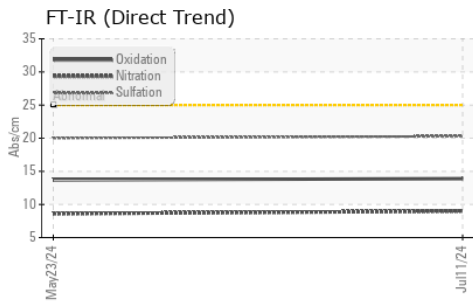

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LP0001878
Lab Number : 06237066
Unique Number : 11125900
Test Package : MOB 2

Received : 15 Jul 2024
Tested : 17 Jul 2024
Diagnosed : 17 Jul 2024 - Wes Davis

GREATER PORTLAND TRANSIT DISTRICT
 114 VALLEY STREET
 PORTLAND, ME
 US 04102-3039
 Contact: JOHN JACQUES
 jjacques@gpmetro.org

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: