



# LIEBHERR

## OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**LIEBHERR L566 1758-71605**  
Component  
**Transmission**  
Fluid  
**LIEBHERR GEAR MF 80W (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>LH0277174</b>	---	---
Sample Date		Client Info		<b>10 Jul 2024</b>	---	---
Machine Age	hrs	Client Info		<b>2470</b>	---	---
Oil Age	hrs	Client Info		<b>0</b>	---	---
Filter Age	hrs	Client Info		<b>0</b>	---	---
Oil Changed		Client Info		<b>Changed</b>	---	---
Filter Changed		Client Info		<b>Changed</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>200	<b>69</b>	---	---
Chromium	ppm	ASTM D5185m	>10	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Silver	ppm	ASTM D5185m		<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m	>50	<b>8</b>	---	---
Lead	ppm	ASTM D5185m	>50	<b>&lt;1</b>	---	---
Copper	ppm	ASTM D5185m	>200	<b>2</b>	---	---
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	---	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---

### CONTAMINATION










There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>50	<b>37</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>5</b>	---	---
Water		WC Method	>0.1	<b>NEG</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	---	---

### FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>17</b>	---	---
Boron	ppm	ASTM D5185m		<b>97</b>	---	---
Barium	ppm	ASTM D5185m		<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185m		<b>0</b>	---	---
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Magnesium	ppm	ASTM D5185m		<b>13</b>	---	---
Calcium	ppm	ASTM D5185m		<b>3592</b>	---	---
Phosphorus	ppm	ASTM D5185m		<b>1331</b>	---	---
Zinc	ppm	ASTM D5185m		<b>1582</b>	---	---
Sulfur	ppm	ASTM D5185m		<b>7494</b>	---	---
Visc @ 40°C	cSt	ASTM D445	61.6	<b>42.4</b>	---	---

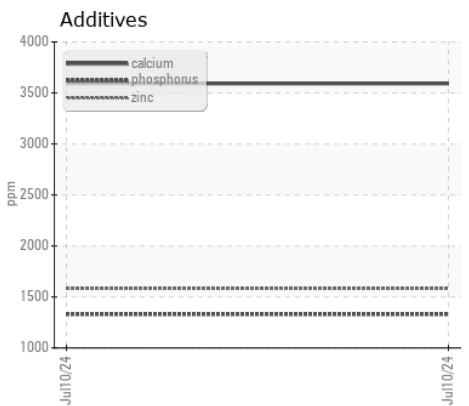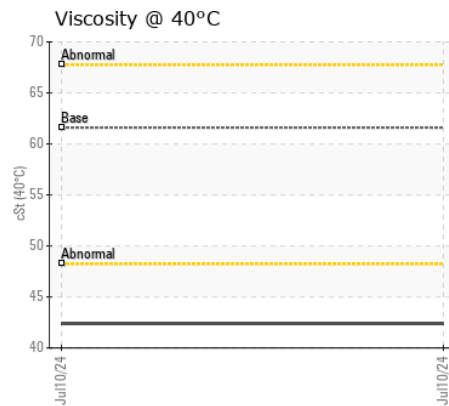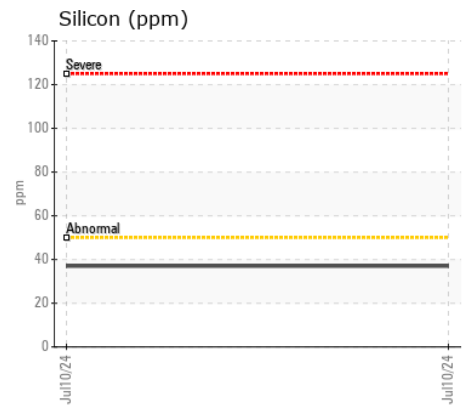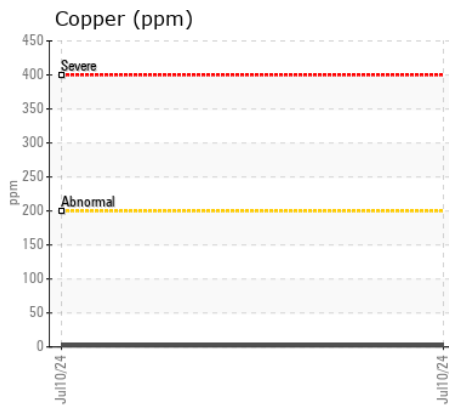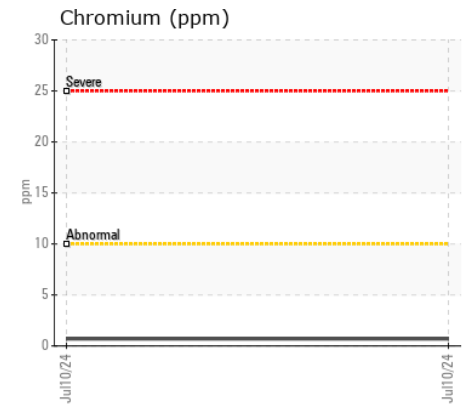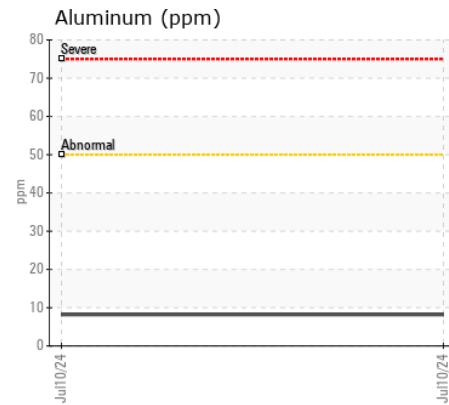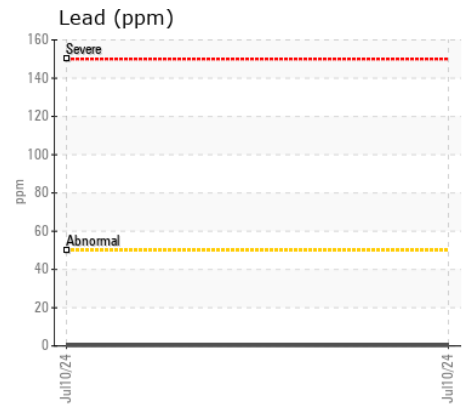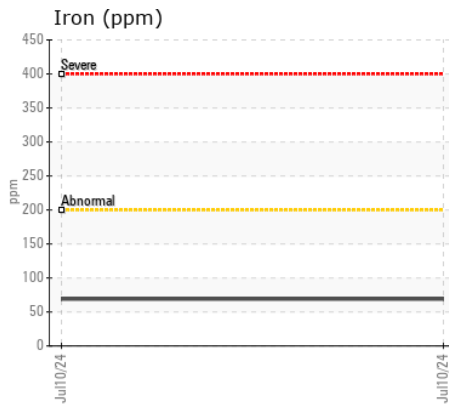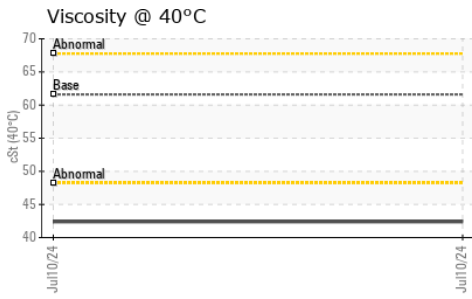

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513

**Sample No.** : LH0277174

**Lab Number** : 06237205

**Unique Number** : 11126039

**Test Package** : MOBCE

**Received** : 15 Jul 2024

**Tested** : 17 Jul 2024

**Diagnosed** : 17 Jul 2024 - Don Baldridge

**BARRETT/COLAS**

4800 SOLVAY RD

JAMESVILLE, NY

US 13078

Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:

F: