



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	NORMAL

Machine Id
CAPACITY 0807102
 Component
Hydrostatic
 Fluid
CHEVRON HYDRAULIC OIL AW ISO 32 (--- GAL)

RECOMMENDATION

The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0855745	WC0748584	WC0748517
Sample Date		Client Info		27 Jun 2024	08 Feb 2024	11 Aug 2023
Machine Age	hrs	Client Info		21081	20519	19643
Oil Age	hrs	Client Info		21081	20519	19643
Filter Age	hrs	Client Info		562	876	585
Oil Changed		Client Info		Not Changed	Not Changed	Not Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				ABNORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>200	8	6	6
Chromium	ppm	ASTM D5185m	>10	0	<1	0
Nickel	ppm	ASTM D5185m		<1	0	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>50	9	9	4
Lead	ppm	ASTM D5185m	>50	0	0	<1
Copper	ppm	ASTM D5185m	>200	1	1	2
Tin	ppm	ASTM D5185m	>10	<1	<1	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION





Moderate concentration of visible dirt/debris present in the oil.

Silicon	ppm	ASTM D5185m	>50	2	2	2
Potassium	ppm	ASTM D5185m	>20	<1	0	<1
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	▲ MODER	LIGHT	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		3	3	3
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	<1	0
Magnesium	ppm	ASTM D5185m		5	3	0
Calcium	ppm	ASTM D5185m		190	200	187
Phosphorus	ppm	ASTM D5185m		371	353	350
Zinc	ppm	ASTM D5185m		456	430	412
Sulfur	ppm	ASTM D5185m		1813	1587	1573
Visc @ 40°C	cSt	ASTM D445	30.4	53.5	54.6	53.9

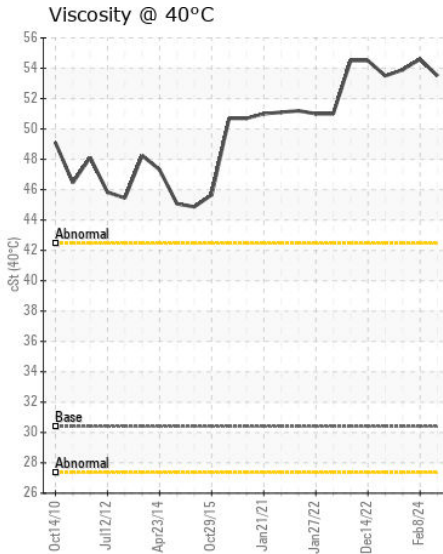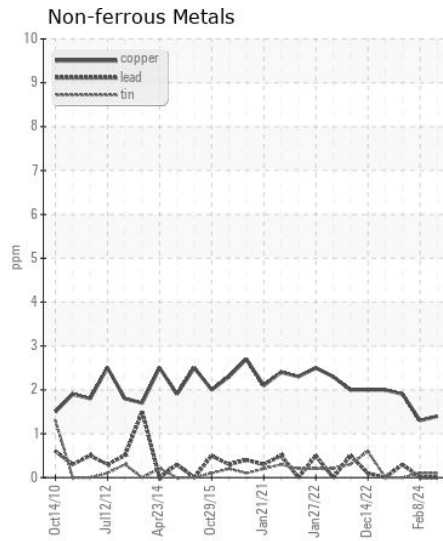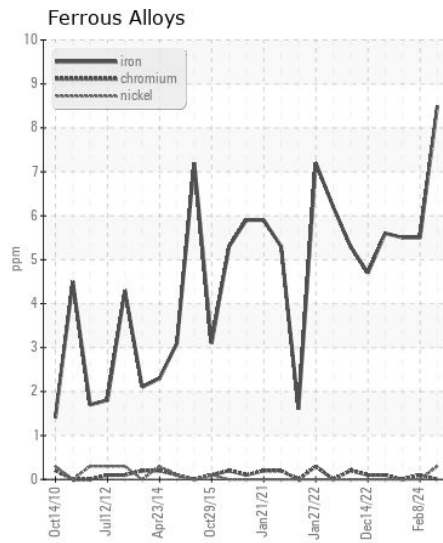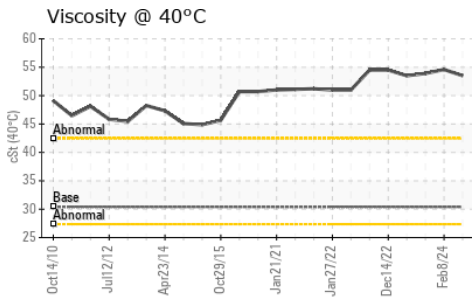

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0855745
Lab Number : 06237208
Unique Number : 11126042
Test Package : FLEET

Received : 15 Jul 2024
Tested : 16 Jul 2024
Diagnosed : 17 Jul 2024 - Don Baldrige

DOLE FRESH FRUIT COMPANY
 10TH AVENUE MARINE TERMINAL, 850 WATER STREET
 SAN DIEGO, CA
 US 92101

Contact: CARLOS RENTERIA
 carlos.renteria@dole.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (619)615-1723
 F: (619)236-0703