



WEAR CHECK

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
9241
 Component
Diesel Engine
 Fluid
SHELL ROTELLA T 15W40 (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0904947	WC0904973	WC0857649
Sample Date		Client Info		05 Jul 2024	24 Apr 2024	15 Nov 2023
Machine Age	mls	Client Info		477617	0	435169
Oil Age	mls	Client Info		21451	0	0
Filter Age	mls	Client Info		21451	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	24	27	6
Chromium	ppm	ASTM D5185m	>20	2	2	<1
Nickel	ppm	ASTM D5185m	>4	<1	2	0
Titanium	ppm	ASTM D5185m		0	<1	<1
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	10	11	4
Lead	ppm	ASTM D5185m	>40	0	<1	0
Copper	ppm	ASTM D5185m	>330	6	6	4
Tin	ppm	ASTM D5185m	>15	<1	1	<1
Vanadium	ppm	ASTM D5185m		0	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>25	8	8	4
Potassium	ppm	ASTM D5185m	>20	<1	3	<1
Fuel		WC Method	>5	<1.0	0.1	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.7	0.4	0.3
Nitration	Abs/cm	*ASTM D7624	>20	8.5	7.7	7.1
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.9	20.4	19.9
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		1	0	1
Boron	ppm	ASTM D5185m	316	108	194	2
Barium	ppm	ASTM D5185m	0.0	0	0	0
Molybdenum	ppm	ASTM D5185m	1.2	86	84	60
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m	24	432	457	981
Calcium	ppm	ASTM D5185m	2292	1337	1308	1111
Phosphorus	ppm	ASTM D5185m	1064	978	943	947
Zinc	ppm	ASTM D5185m	1160	1187	1127	1294
Sulfur	ppm	ASTM D5185m	4996	3451	3580	3215
Oxidation	Abs/.1mm	*ASTM D7414	>25	16.7	15.1	15.4
Base Number (BN)	mg KOH/g	ASTM D2896	10.1	5.5	6.7	9.8
Visc @ 100°C	cSt	ASTM D445	15.7	12.8	12.4	13.7


FT-IR (Direct Trend)

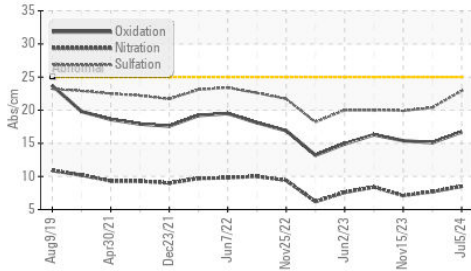


Base Number

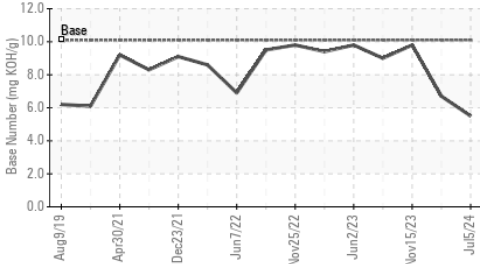


Viscosity @ 100°C

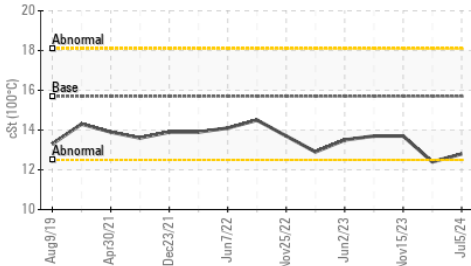


Ferrous Alloys

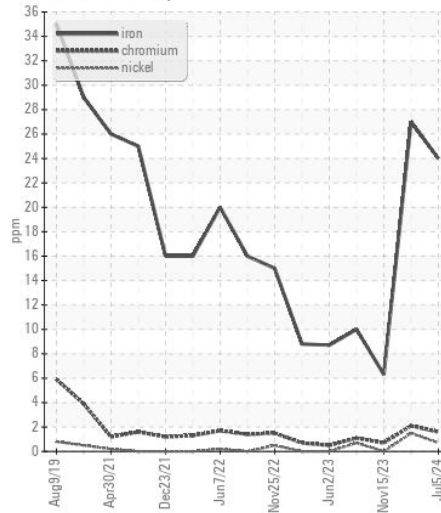


Non-ferrous Metals

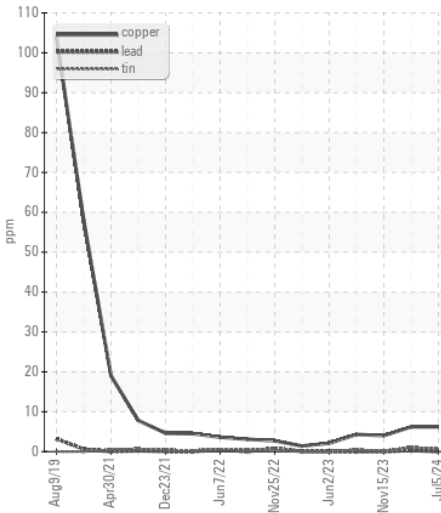

Viscosity @ 100°C

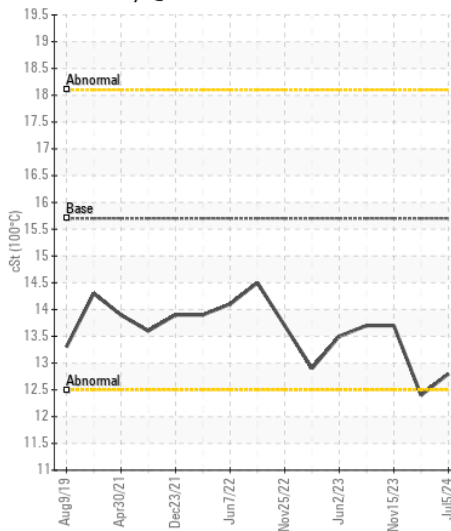

Base Number

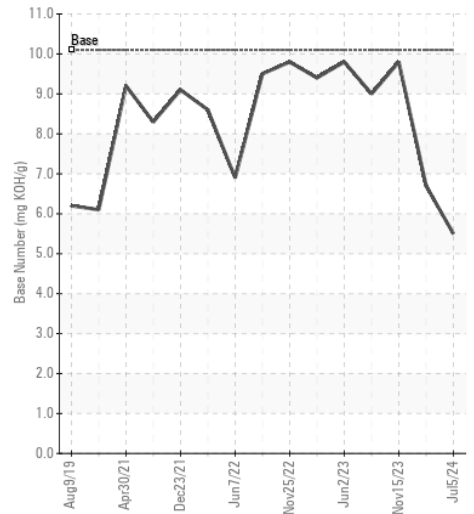

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : WC0904947

Lab Number : 06237269

Unique Number : 11126103

Test Package : FLEET

Received : 15 Jul 2024

Tested : 17 Jul 2024

Diagnosed : 17 Jul 2024 - Wes Davis

SALEM NATIONALEASE CORPORATION

198 PARK PLAZA DRIVE

WINSTON SALEM, NC

US 27105

Contact: Audrey Hopkins

Audrey.Hopkins@salemcorp.com

T: (336)767-9642

F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)