



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area  
**CPT OA FRANKS**  
Machine Id  
**[CPT OA FRANKS] 007 586734-7**  
Component  
**Port Genset**  
Fluid  
**CHEVRON DELO 400 LE 15W40 (5 GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>MW0071100</b>	MW06153584	MW06121353
Sample Date		Client Info		<b>30 Jun 2024</b>	27 Mar 2024	26 Feb 2024
Machine Age	hrs	Client Info		<b>29864</b>	28631	28251
Oil Age	hrs	Client Info		<b>36</b>	0	365
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>N/A</b>	N/A	N/A
Filter Changed		Client Info		<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>50	<b>2</b>	4	6
Chromium	ppm	ASTM D5185m	>4	<b>0</b>	0	<1
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m		<b>1</b>	2	3
Silver	ppm	ASTM D5185m	>5	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>12	<b>3</b>	4	4
Lead	ppm	ASTM D5185m	>17	<b>0</b>	<1	<1
Copper	ppm	ASTM D5185m	>70	<b>0</b>	<1	0
Tin	ppm	ASTM D5185m	>15	<b>0</b>	<1	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**









There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>6</b>	7	8
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	3	1
Fuel		WC Method	>4.0	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844		<b>0.1</b>	0.1	0.1
Nitration	Abs/cm	*ASTM D7624	>20	<b>5.2</b>	8.3	8.4
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>21.4</b>	22.3	21.8
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>1</b>	3	2
Boron	ppm	ASTM D5185m		<b>352</b>	386	307
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>106</b>	118	109
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	3	3
Magnesium	ppm	ASTM D5185m		<b>616</b>	706	663
Calcium	ppm	ASTM D5185m		<b>1562</b>	1689	1619
Phosphorus	ppm	ASTM D5185m	1200	<b>802</b>	785	736
Zinc	ppm	ASTM D5185m	1300	<b>901</b>	898	894
Sulfur	ppm	ASTM D5185m	3200	<b>3194</b>	3299	2988
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>14.7</b>	17.7	17.5
Base Number (BN)	mg KOH/g	ASTM D2896	9.6	<b>8.9</b>	8.3	8.3
Visc @ 100°C	cSt	ASTM D445	15.7	<b>13.9</b>	13.6	13.7

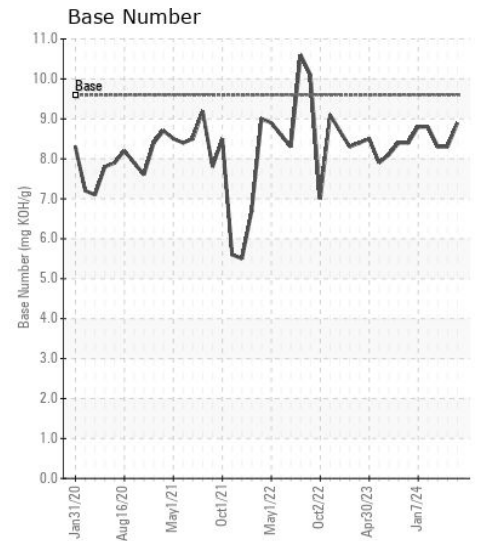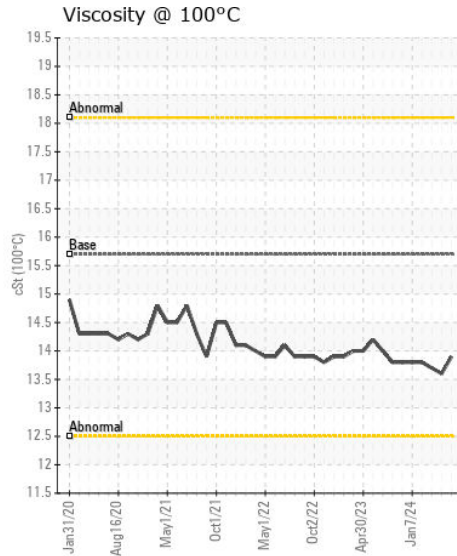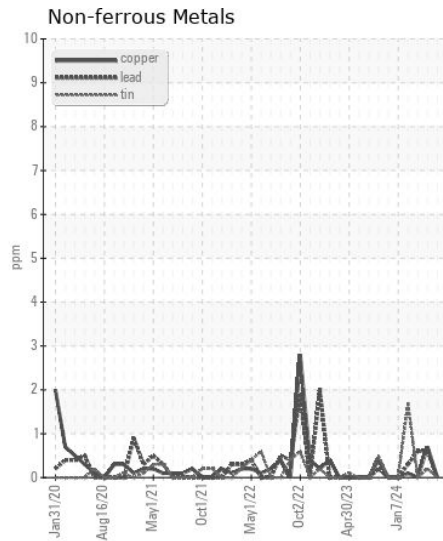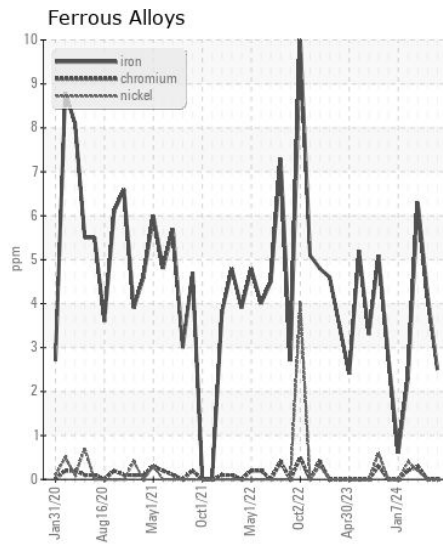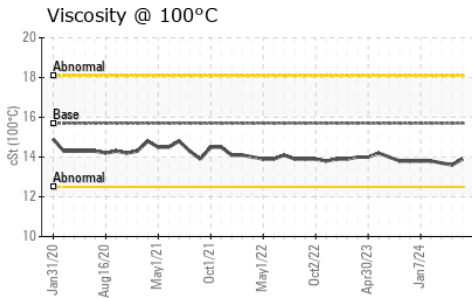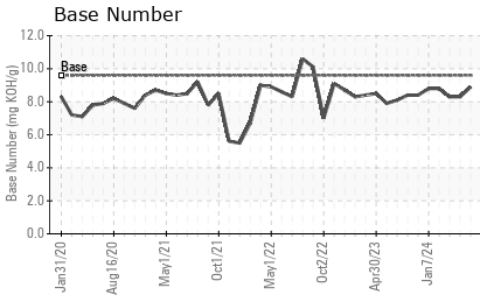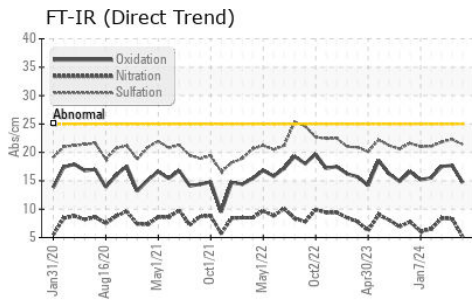

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : MW0071100 **Received** : 15 Jul 2024  
**Lab Number** : 06237324 **Tested** : 17 Jul 2024  
**Unique Number** : 11126158 **Diagnosed** : 17 Jul 2024 - Wes Davis  
**Test Package** : MAR 2

**INGRAM BARGE**  
 900 S 3RD ST  
 PADUCAH, KY  
 US 42003

Contact: JAMES ADAIR  
 james.adair@ingrambarga.com  
 T: (270)415-4467  
 F: (615)695-3697

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)