



# VOLVO

## OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Area  
**[717593 GENERAL RV]**  
Machine Id  
**VOLVO L20H 1220370**  
Component  
**Diesel Engine**  
Fluid  
**VOLVO ULTRA DIESEL ENGINE OIL 15W40 VDS-3 (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>VCP451166</b>	VCP432460	VCP423509
Sample Date		Client Info		<b>03 Jun 2024</b>	31 Oct 2023	31 Mar 2023
Machine Age	hrs	Client Info		<b>4852</b>	3907	2832
Oil Age	hrs	Client Info		<b>500</b>	0	500
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>4</b>	3	4
Chromium	ppm	ASTM D5185m	>10	<b>0</b>	<1	<1
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m		<b>0</b>	0	0
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>10	<b>&lt;1</b>	1	1
Lead	ppm	ASTM D5185m	>20	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>15	<b>3</b>	0	<1
Tin	ppm	ASTM D5185m	>10	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	<b>6</b>	5	5
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	1	1
Fuel		WC Method	>6.0	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0</b>	0	0.1
Nitration	Abs/cm	*ASTM D7624	>20	<b>7.6</b>	7.2	7.3
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>20.3</b>	21.1	22.1
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG

### FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>3</b>	<1	2
Boron	ppm	ASTM D5185m	2.5	<b>40</b>	44	48
Barium	ppm	ASTM D5185m	0.0	<b>0</b>	2	0
Molybdenum	ppm	ASTM D5185m	0.7	<b>43</b>	45	48
Manganese	ppm	ASTM D5185m	0.0	<b>&lt;1</b>	0	<1
Magnesium	ppm	ASTM D5185m	256	<b>606</b>	476	563
Calcium	ppm	ASTM D5185m	2057	<b>1651</b>	1629	1744
Phosphorus	ppm	ASTM D5185m	935	<b>984</b>	838	981
Zinc	ppm	ASTM D5185m	1223	<b>1107</b>	1049	1243
Sulfur	ppm	ASTM D5185m	4079	<b>3523</b>	3251	3882
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>18.2</b>	20.0	20.6
Base Number (BN)	mg KOH/g	ASTM D2896	10	<b>10.0</b>	9.8	10.1
Visc @ 100°C	cSt	ASTM D445	15.0	<b>12.8</b>	12.6	13.0

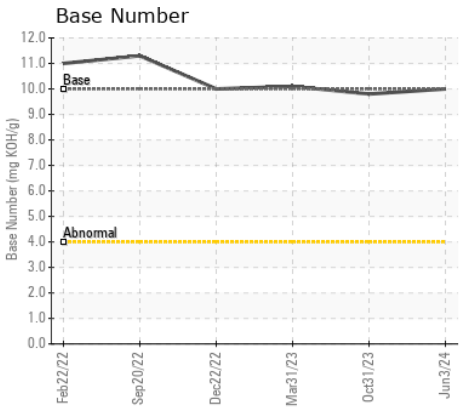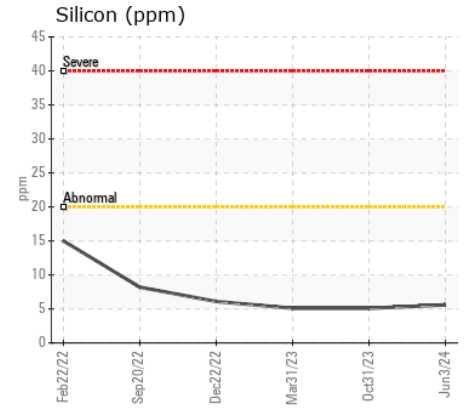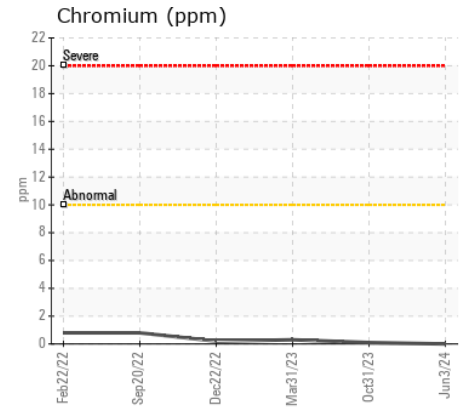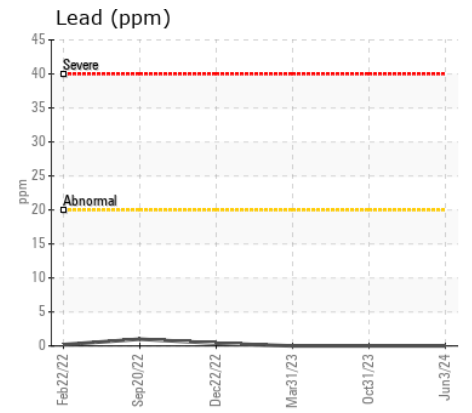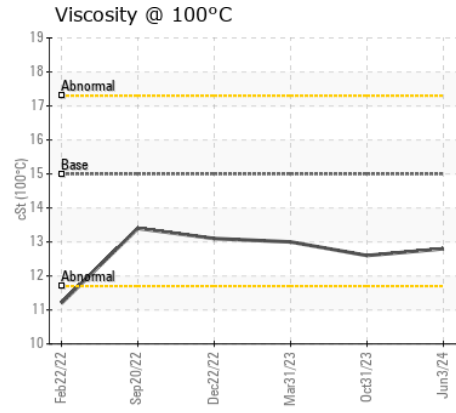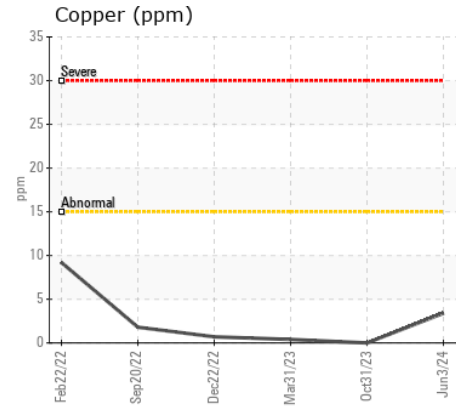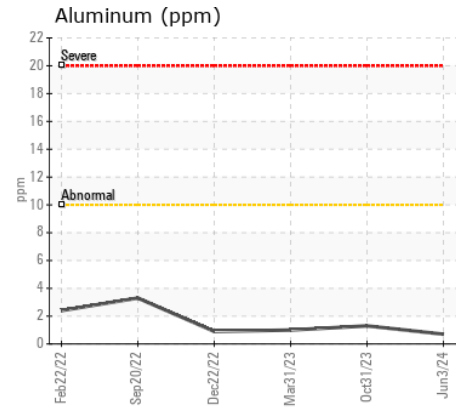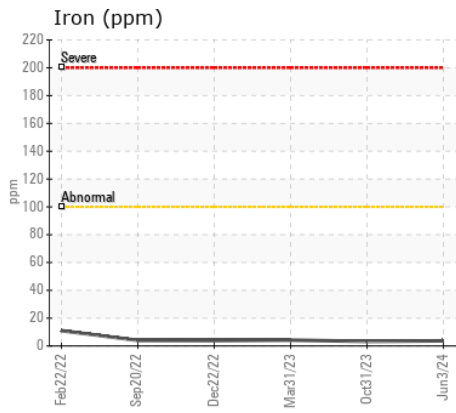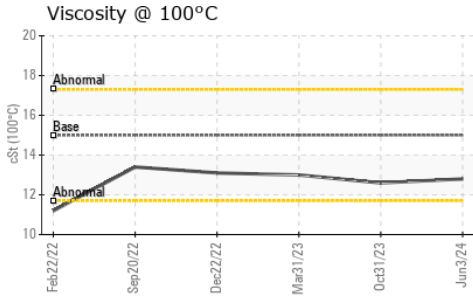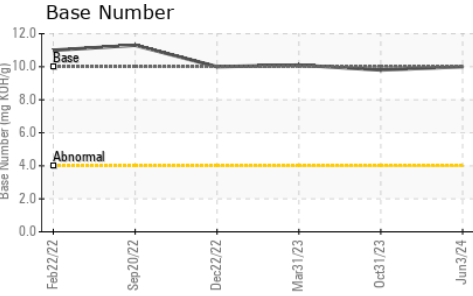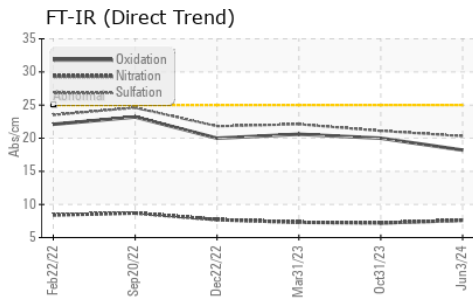

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : VCP451166 **Received** : 16 Jul 2024  
**Lab Number** : 06237492 **Tested** : 17 Jul 2024  
**Unique Number** : 11126326 **Diagnosed** : 17 Jul 2024 - Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**ALTA EQUIPMENT/FLAGLER CONSTRUCTION EQUIPMENT LLC**  
 8418 PALM RIVER ROAD  
 TAMPA, FL  
 US 33619  
 Contact: JOHN FARDELLA  
 john.fardella@altg.com  
 T: (813)630-0077  
 F: (813)630-2233

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)