



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	ATTENTION



Area

[716869 N AM MINING]

Machine Id

VOLVO L180H 5795

Component

Diesel Engine

Fluid

VOLVO ULTRA DIESEL ENGINE OIL 15W40 VDS-3 (--- QTS)

RECOMMENDATION

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP449861	VCP54870	---
Sample Date		Client Info		17 Jun 2024	17 Jan 2007	---
Machine Age	hrs	Client Info		4855	7313	---
Oil Age	hrs	Client Info		500	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Not Changed	---
Filter Changed		Client Info		Changed	Not Changed	---
Sample Status				ATTENTION	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>200	4	6	---
Chromium	ppm	ASTM D5185m	>20	0	<1	---
Nickel	ppm	ASTM D5185m	>5	0	<1	---
Titanium	ppm	ASTM D5185m		0	<1	---
Silver	ppm	ASTM D5185m	>2	0	0	---
Aluminum	ppm	ASTM D5185m	>30	<1	2	---
Lead	ppm	ASTM D5185m	>40	0	0	---
Copper	ppm	ASTM D5185m	>20	2	1	---
Tin	ppm	ASTM D5185m	>20	0	0	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION













Fuel content negligible. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	4	4	---
Potassium	ppm	ASTM D5185m	>20	<1	0	---
Fuel	%	ASTM D3524	>6.0	0.3	<1.0	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	0.1	0.2	---
Nitration	Abs/cm	*ASTM D7624	>20	6.7	5.	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.5	15.	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

Sodium	ppm	ASTM D5185m		3	1	---
Boron	ppm	ASTM D5185m	2.5	41	4	---
Barium	ppm	ASTM D5185m	0.0	0	0	---
Molybdenum	ppm	ASTM D5185m	0.7	40	1	---
Manganese	ppm	ASTM D5185m	0.0	<1	<1	---
Magnesium	ppm	ASTM D5185m	256	549	11	---
Calcium	ppm	ASTM D5185m	2057	1562	2704	---
Phosphorus	ppm	ASTM D5185m	935	926	1103	---
Zinc	ppm	ASTM D5185m	1223	1043	1149	---
Sulfur	ppm	ASTM D5185m	4079	3465	4030	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	17.7	10.	---
Base Number (BN)	mg KOH/g	ASTM D2896	10	9.5	---	---
Visc @ 100°C	cSt	ASTM D445	15.0	12.0	14.13	---

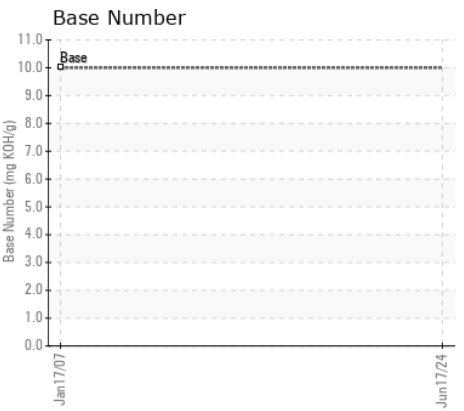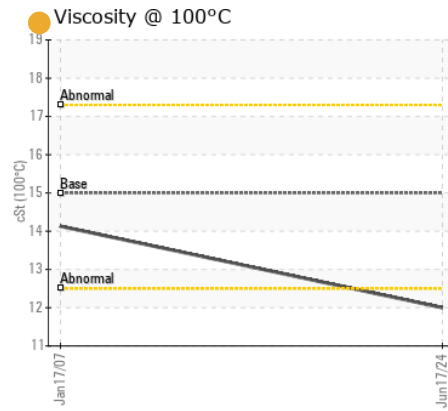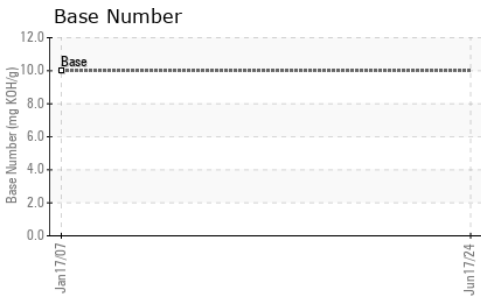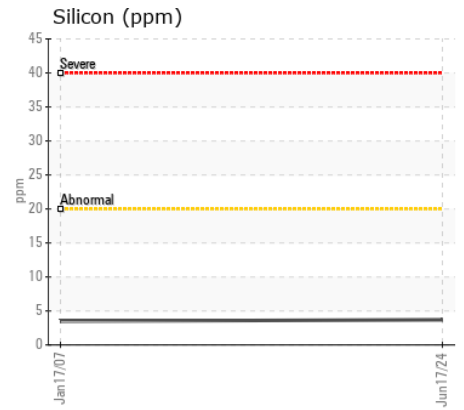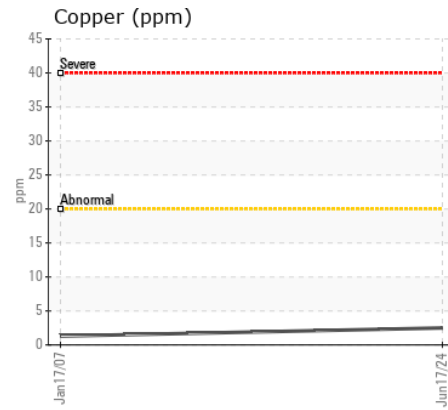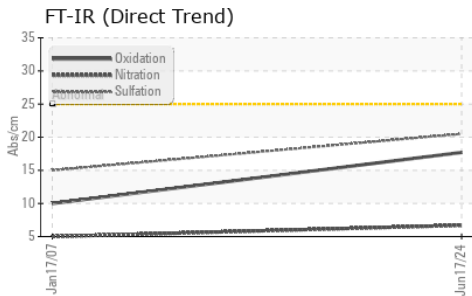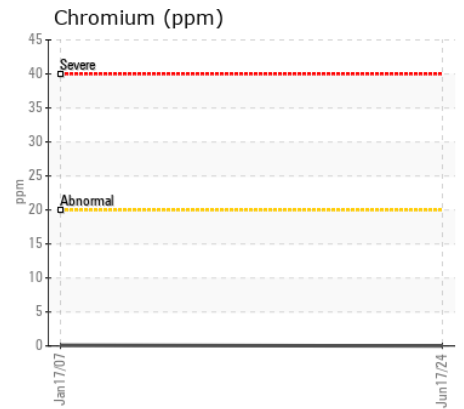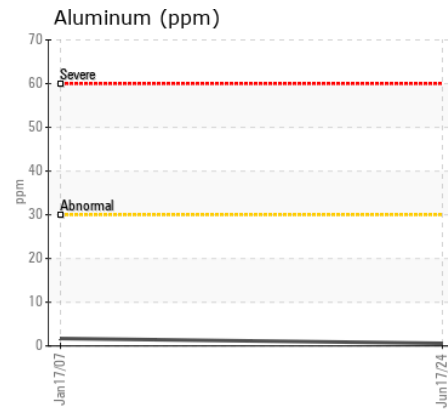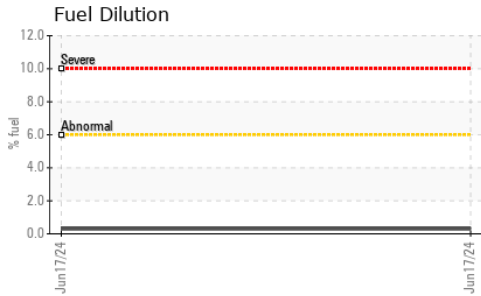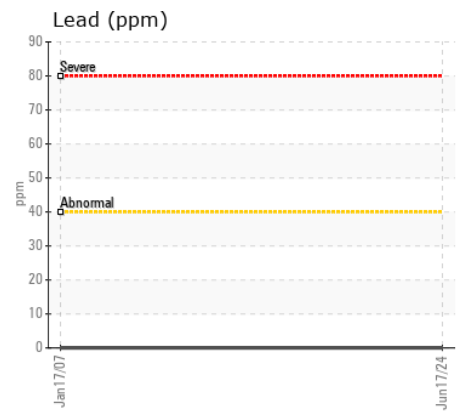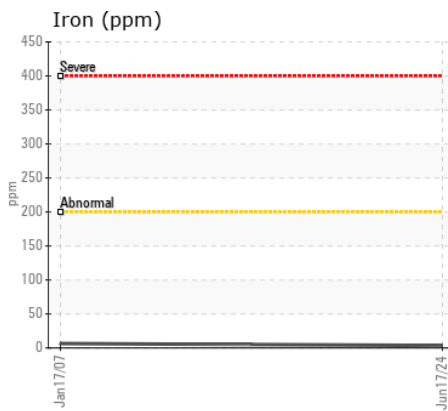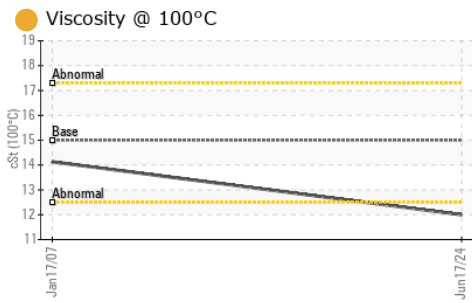

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP449861 **Received** : 16 Jul 2024
Lab Number : 06237495 **Tested** : 18 Jul 2024
Unique Number : 11126329 **Diagnosed** : 18 Jul 2024 - Sean Felton
Test Package : MOB 1 (Additional Tests: FuelDilution, PercentFuel, TBN)

ALTA EQUIPMENT/FLAGLER CONSTRUCTION EQUIPMENT LLC
 8418 PALM RIVER ROAD
 TAMPA, FL
 US 33619
 Contact: JOHN FARDELLA
 john.fardella@altg.com
 T: (813)630-0077
 F: (813)630-2233

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)