



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area

[26069]

Machine Id

VOLVO L120H 632990

Component

Diesel Engine

Fluid

VOLVO ULTRA DIESEL ENGINE OIL 15W40 VDS-3 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP449832	VCP430768	VCP398953
Sample Date		Client Info		10 Jul 2024	05 Sep 2023	26 Jan 2023
Machine Age	hrs	Client Info		5174	3601	2518
Oil Age	hrs	Client Info		0	1000	500
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>200	46	25	10
Chromium	ppm	ASTM D5185m	>20	2	2	<1
Nickel	ppm	ASTM D5185m	>5	0	0	<1
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>30	17	9	3
Lead	ppm	ASTM D5185m	>40	14	3	1
Copper	ppm	ASTM D5185m	>20	5	4	2
Tin	ppm	ASTM D5185m	>20	1	1	1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	8	6	5
Potassium	ppm	ASTM D5185m	>20	1	0	0
Fuel		WC Method	>6.0	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.8	0.5	0.3
Nitration	Abs/cm	*ASTM D7624	>20	15.7	12.1	8.7
Sulfation	Abs/.1mm	*ASTM D7415	>30	28.5	25.0	23.4
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		5	3	2
Boron	ppm	ASTM D5185m	2.5	38	17	35
Barium	ppm	ASTM D5185m	0.0	0	0	0
Molybdenum	ppm	ASTM D5185m	0.7	57	52	44
Manganese	ppm	ASTM D5185m	0.0	<1	<1	<1
Magnesium	ppm	ASTM D5185m	256	582	690	532
Calcium	ppm	ASTM D5185m	2057	2091	1949	1701
Phosphorus	ppm	ASTM D5185m	935	1076	1068	922
Zinc	ppm	ASTM D5185m	1223	1359	1325	1157
Sulfur	ppm	ASTM D5185m	4079	3603	3596	3244
Oxidation	Abs/.1mm	*ASTM D7414	>25	28.9	25.6	22.8
Base Number (BN)	mg KOH/g	ASTM D2896	10	8.3	8.8	10.4
Visc @ 100°C	cSt	ASTM D445	15.0	14.8	14.8	14.0

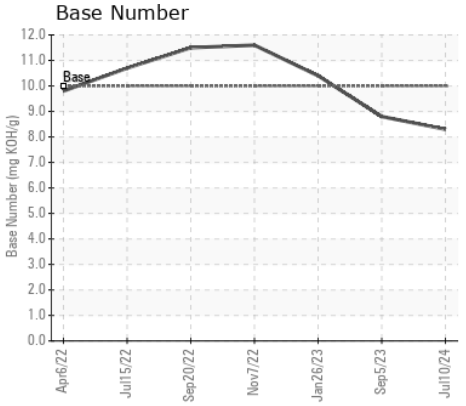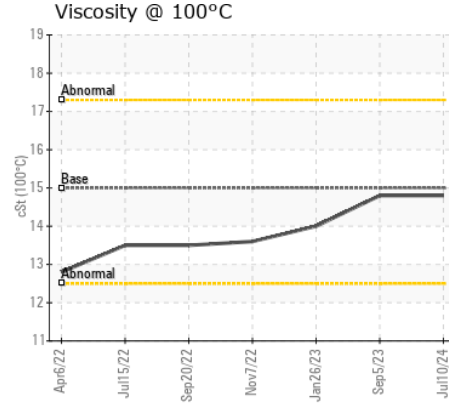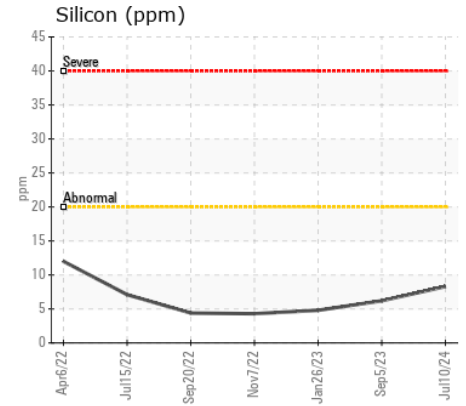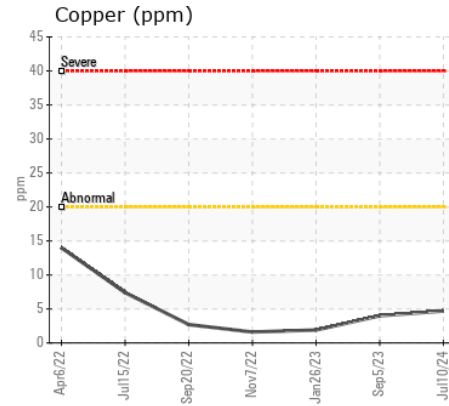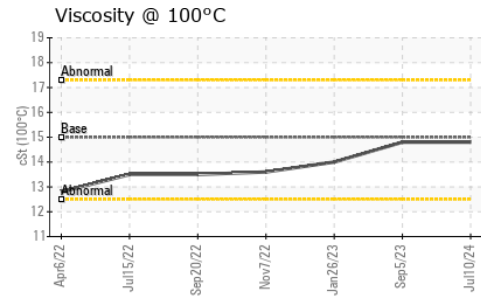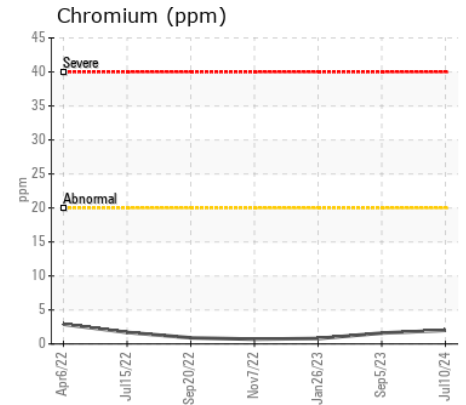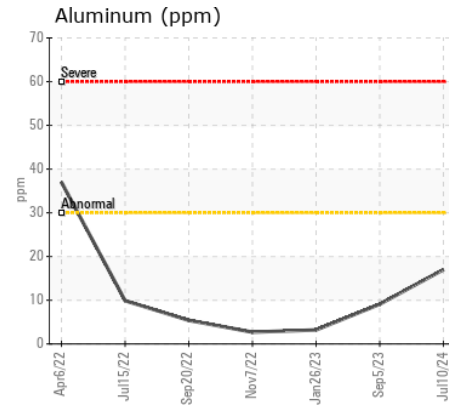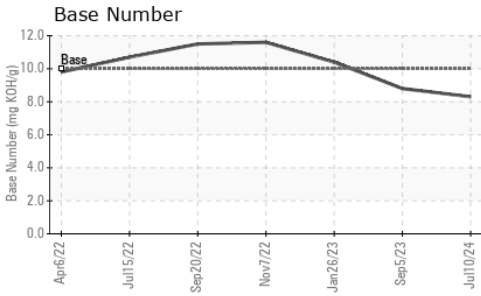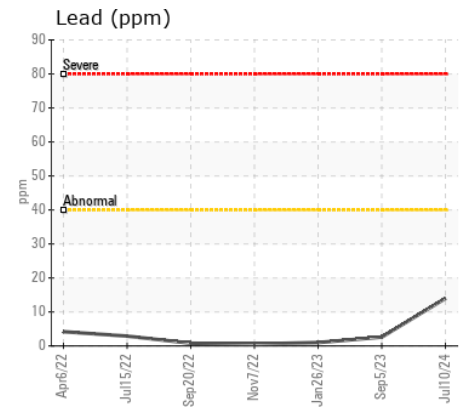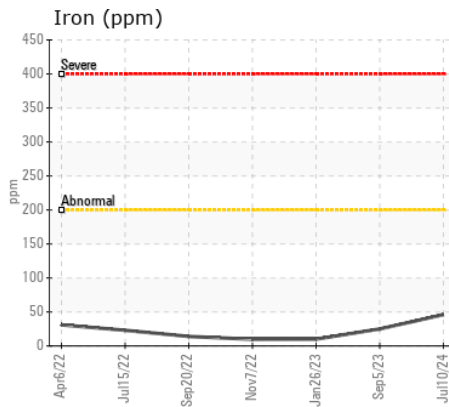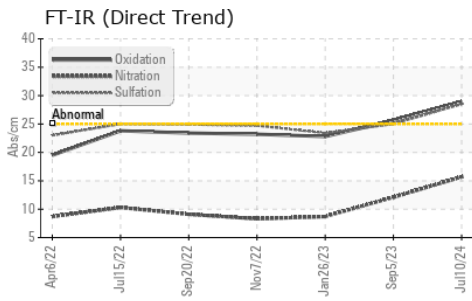

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP449832
Lab Number : 06237511
Unique Number : 11126345
Test Package : MOB 1 (Additional Tests: TBN)

Received : 16 Jul 2024
Tested : 17 Jul 2024
Diagnosed : 18 Jul 2024 - Sean Felton

218 - ASCENDUM MACHINERY INC - N. CHARLESTON
 7235 CROSS COUNTRY RD.
 NORTH CHARLESTON, SC
 US 29418
 Contact: MATT MITCHAM
 matt.mitcham@ascendummachinery.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: (843)414-1129