



# VOLVO

## OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**VOLVO A40G 352026**  
Component  
**Diesel Engine**  
Fluid  
**MOBIL 15W40 (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>VCP451048</b>	VCP442539	VCP399417
Sample Date		Client Info		<b>10 Jun 2024</b>	15 Apr 2024	12 Mar 2024
Machine Age	hrs	Client Info		<b>10748</b>	10378	10136
Oil Age	hrs	Client Info		<b>370</b>	242	177
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>200	<b>5</b>	4	3
Chromium	ppm	ASTM D5185m	>20	<b>0</b>	<1	<1
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	2	<1
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	<1
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>30	<b>2</b>	2	4
Lead	ppm	ASTM D5185m	>40	<b>0</b>	0	<1
Copper	ppm	ASTM D5185m	>20	<b>0</b>	<1	<1
Tin	ppm	ASTM D5185m	>20	<b>0</b>	2	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	<1
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	<b>6</b>	5	4
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	1	2
Fuel		WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.1</b>	0.1	0.1
Nitration	Abs/cm	*ASTM D7624	>20	<b>7.4</b>	6.3	7.0
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>21.8</b>	21.0	19.6
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

### FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>118	<b>6</b>	6	4
Boron	ppm	ASTM D5185m		<b>47</b>	63	88
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>42</b>	45	80
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m		<b>495</b>	481	568
Calcium	ppm	ASTM D5185m		<b>1711</b>	1783	1445
Phosphorus	ppm	ASTM D5185m		<b>771</b>	777	742
Zinc	ppm	ASTM D5185m		<b>861</b>	885	866
Sulfur	ppm	ASTM D5185m		<b>2907</b>	3067	3120
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>19.9</b>	18.9	17.2
Base Number (BN)	mg KOH/g	ASTM D2896		<b>9.5</b>	9.7	8.6
Visc @ 100°C	cSt	ASTM D445		<b>12.6</b>	12.8	12.6

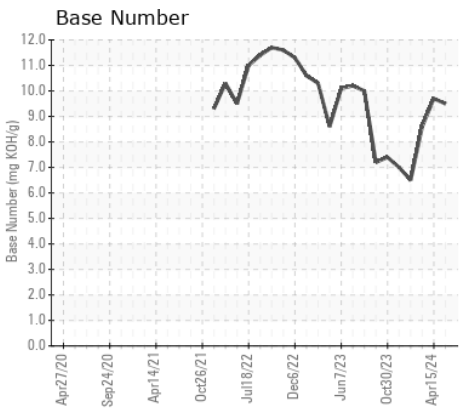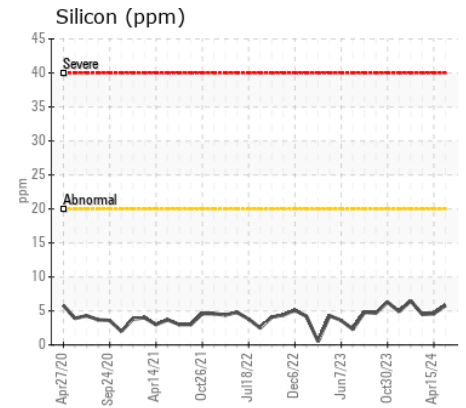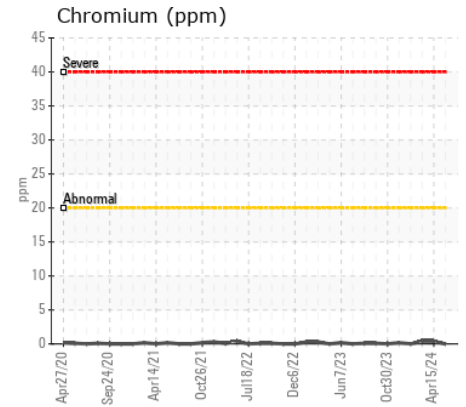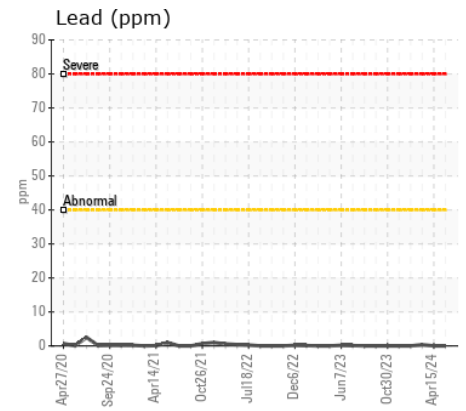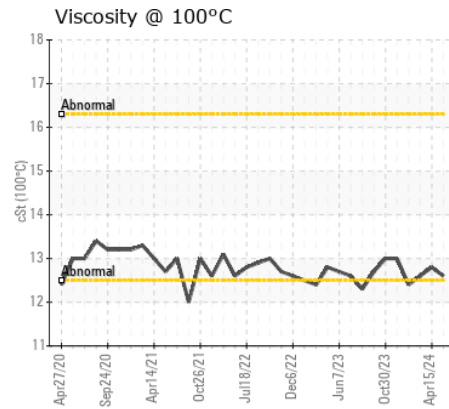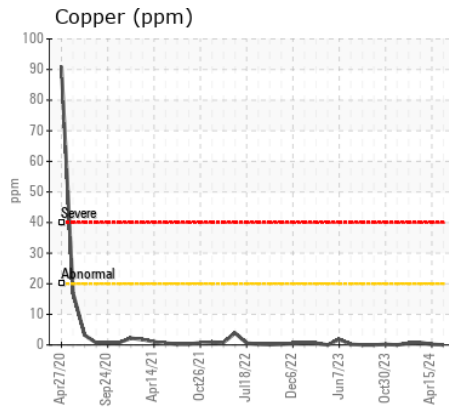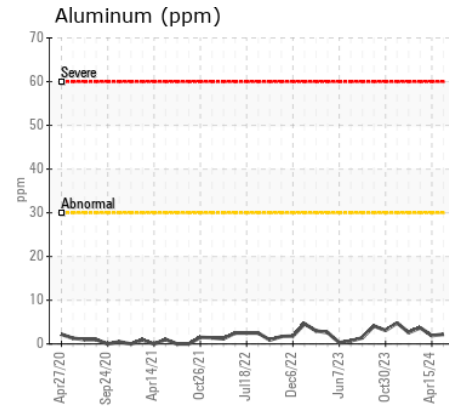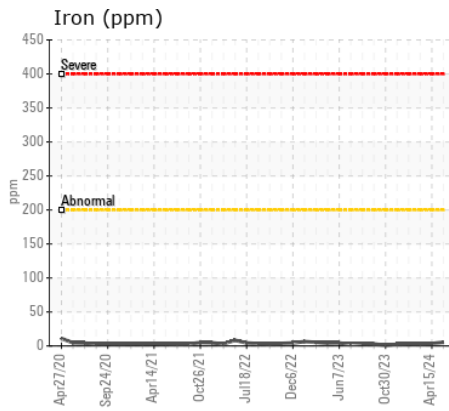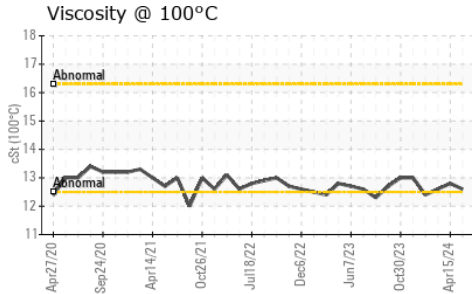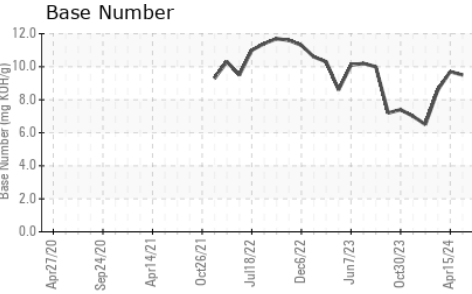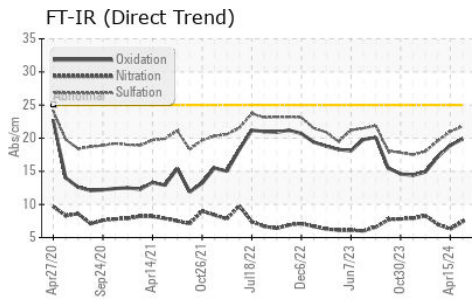

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : VCP451048 **Received** : 16 Jul 2024  
**Lab Number** : 06237514 **Tested** : 17 Jul 2024  
**Unique Number** : 11126348 **Diagnosed** : 17 Jul 2024 - Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**SCHILBERG CONSTRUCTION COMPANY**  
 PO BOX 358  
 GREENFIELD, IA  
 US 50849  
 Contact: SCOTT ARMSTRONG  
 sarmstrong@schildberg.com  
 T: (641)743-8237  
 F: (641)743-2486

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)