



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**JOHN DEERE 700K 6X45 (S/N 1T0700KXTKF364911)**  
 Component  
**Diesel Engine**  
 Fluid  
**XTREME 15W40 (--- QTS)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0197253</b>	JR0141071	---
Sample Date		Client Info		<b>12 Jul 2024</b>	06 Jul 2023	---
Machine Age	hrs	Client Info		<b>518</b>	405	---
Oil Age	hrs	Client Info		<b>356</b>	356	---
Filter Age	hrs	Client Info		<b>356</b>	0	---
Oil Changed		Client Info		<b>Not Changd</b>	Not Changd	---
Filter Changed		Client Info		<b>Not Changd</b>	N/A	---
Sample Status				<b>NORMAL</b>	NORMAL	---

### WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185m	>51	<b>24</b>	8	---
Chromium	ppm	ASTM D5185m	>11	<b>&lt;1</b>	<1	---
Nickel	ppm	ASTM D5185m	>5	<b>2</b>	<1	---
Titanium	ppm	ASTM D5185m		<b>0</b>	0	---
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>31	<b>3</b>	1	---
Lead	ppm	ASTM D5185m	>26	<b>0</b>	0	---
Copper	ppm	ASTM D5185m	>26	<b>3</b>	0	---
Tin	ppm	ASTM D5185m	>4	<b>0</b>	0	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

### CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>22	<b>7</b>	4	---
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	---
Fuel		WC Method	>2.1	<b>&lt;1.0</b>	<1.0	---
Water		WC Method	>0.21	<b>NEG</b>	NEG	---
Glycol		WC Method		<b>NEG</b>	NEG	---
Soot %	%	*ASTM D7844	>3	<b>0.1</b>	0.1	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>6.6</b>	5.3	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>21.3</b>	19.7	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.21	<b>NEG</b>	NEG	---

### FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>31	<b>3</b>	0	---
Boron	ppm	ASTM D5185m		<b>470</b>	600	---
Barium	ppm	ASTM D5185m		<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m		<b>95</b>	92	---
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Magnesium	ppm	ASTM D5185m		<b>454</b>	487	---
Calcium	ppm	ASTM D5185m		<b>1450</b>	1462	---
Phosphorus	ppm	ASTM D5185m		<b>1042</b>	1115	---
Zinc	ppm	ASTM D5185m		<b>1226</b>	1414	---
Sulfur	ppm	ASTM D5185m		<b>3910</b>	4750	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>16.0</b>	14.6	---
Base Number (BN)	mg KOH/g	ASTM D2896		<b>8.4</b>	8.6	---
Visc @ 100°C	cSt	ASTM D445		<b>13.1</b>	13.2	---

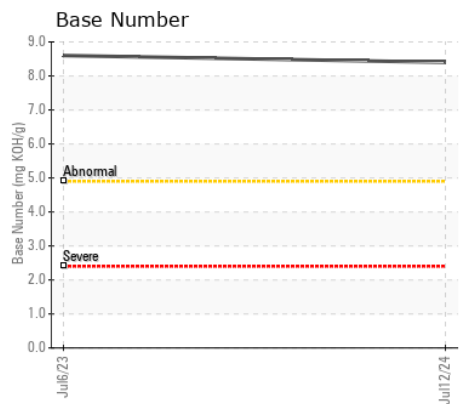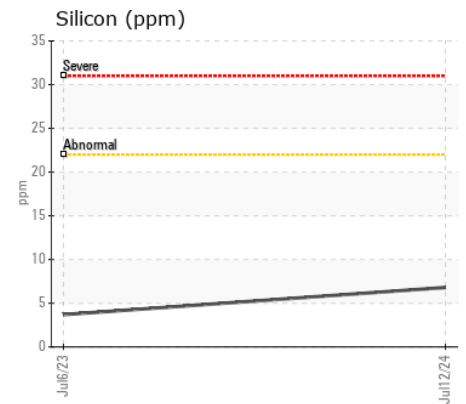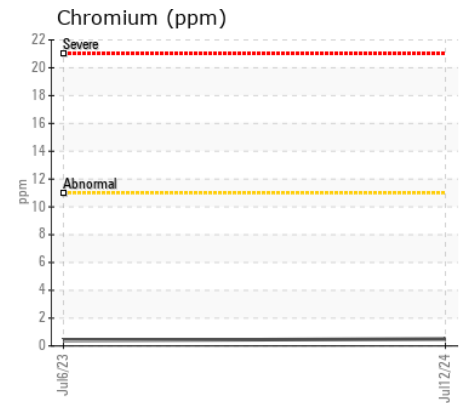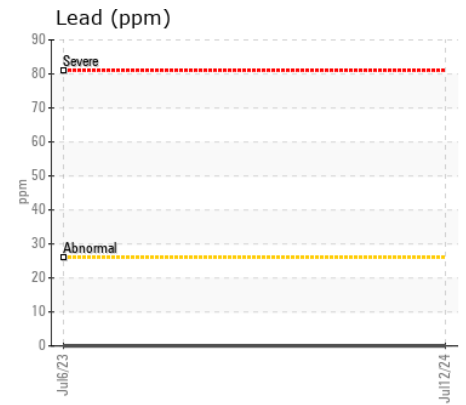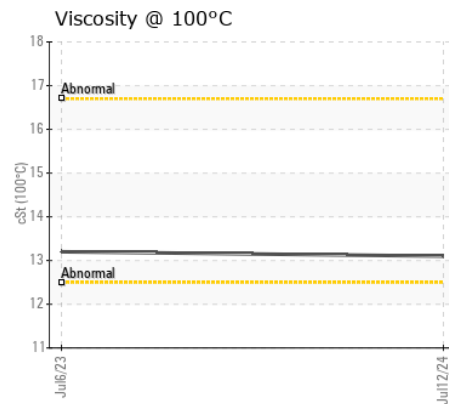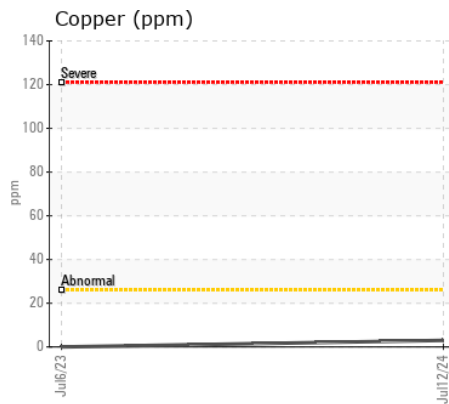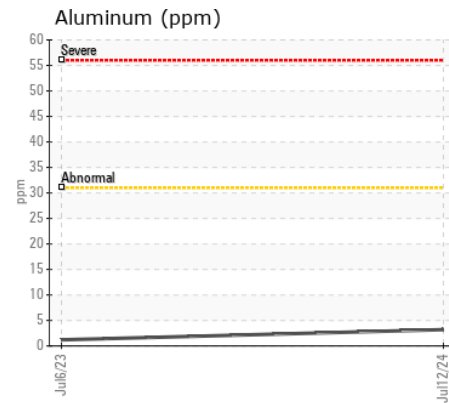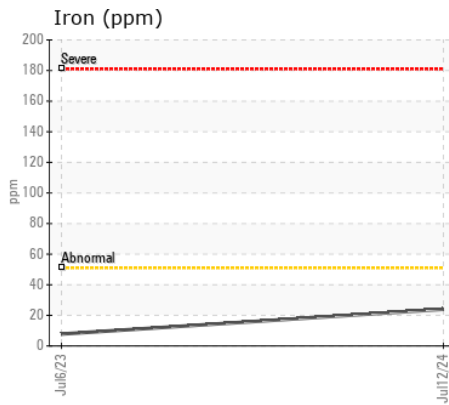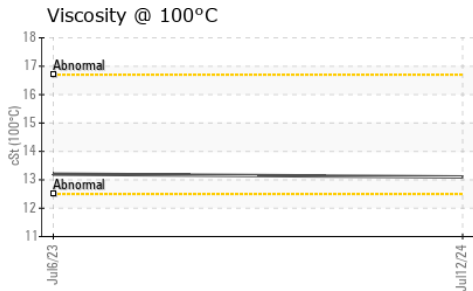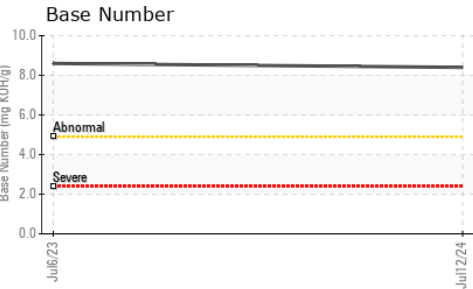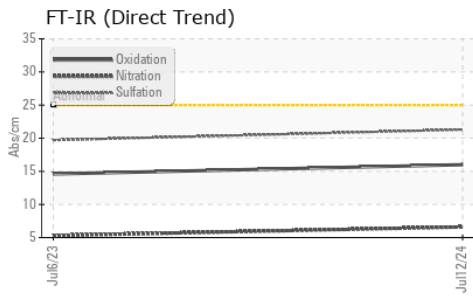

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0197253 **Received** : 16 Jul 2024  
**Lab Number** : 06237542 **Tested** : 17 Jul 2024  
**Unique Number** : 11126376 **Diagnosed** : 17 Jul 2024 - Wes Davis  
**Test Package** : MOBCE ( Additional Tests: TBN )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**NC FOREST SERVICE**  
 221 AIRPORT RD  
 FAYETTEVILLE, NC  
 US 28306  
 Contact: WALTER CAPPS  
 WATER.CAPPS@NCAGR.GOV  
 T:  
 F: