



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**JOHN DEERE 410E 1DW410EBCNF715190**  
Component  
**Diesel Engine**  
Fluid  
**JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (52 QTS)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0221044</b>	JR0214170	JR0201081
Sample Date		Client Info		<b>12 Jul 2024</b>	03 May 2024	05 Feb 2024
Machine Age	hrs	Client Info		<b>5482</b>	5001	4375
Oil Age	hrs	Client Info		<b>481</b>	626	702
Filter Age	hrs	Client Info		<b>481</b>	626	702
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>Changed</b>	Changed	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>51	<b>10</b>	15	15
Chromium	ppm	ASTM D5185m	>11	<b>0</b>	<1	<1
Nickel	ppm	ASTM D5185m	>5	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	0
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>31	<b>3</b>	4	5
Lead	ppm	ASTM D5185m	>26	<b>2</b>	7	6
Copper	ppm	ASTM D5185m	>26	<b>4</b>	6	6
Tin	ppm	ASTM D5185m	>4	<b>0</b>	2	2
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	<1
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>22	<b>5</b>	7	6
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	3	0
Fuel		WC Method	>2.1	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.21	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.3</b>	0.4	0.4
Nitration	Abs/cm	*ASTM D7624	>20	<b>8.9</b>	9.0	9.5
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>22.4</b>	23.4	24.3
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.21	<b>NEG</b>	NEG	NEG

### FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>31	<b>5</b>	3	4
Boron	ppm	ASTM D5185m		<b>167</b>	130	103
Barium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Molybdenum	ppm	ASTM D5185m		<b>245</b>	252	253
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m		<b>801</b>	801	795
Calcium	ppm	ASTM D5185m		<b>1441</b>	1394	1274
Phosphorus	ppm	ASTM D5185m		<b>892</b>	936	829
Zinc	ppm	ASTM D5185m		<b>1023</b>	1047	996
Sulfur	ppm	ASTM D5185m		<b>3347</b>	3367	2865
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>16.5</b>	17.7	18.0
Base Number (BN)	mg KOH/g	ASTM D2896	13.6	<b>8.3</b>	7.8	7.3
Visc @ 100°C	cSt	ASTM D445	15.4	<b>12.8</b>	12.6	12.6


**FT-IR (Direct Trend)**

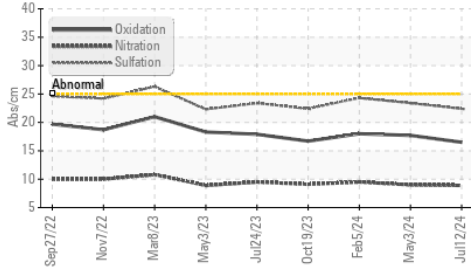


**Ferrous Alloys**

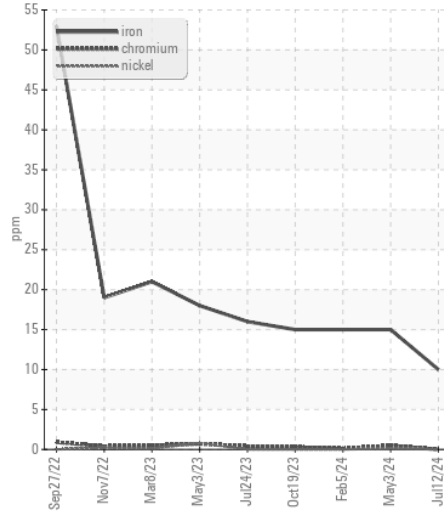


**Base Number**

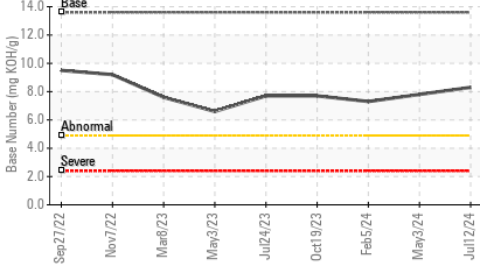


**Non-ferrous Metals**

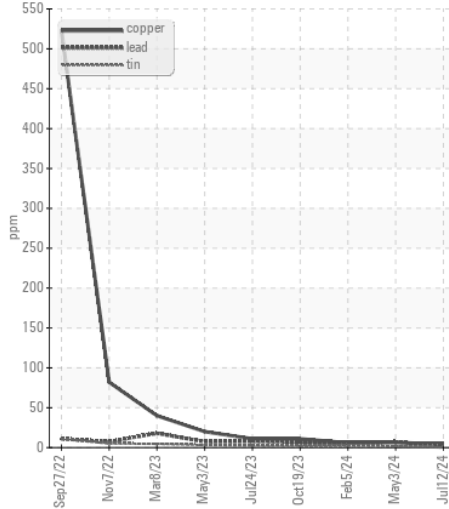


**Viscosity @ 100°C**

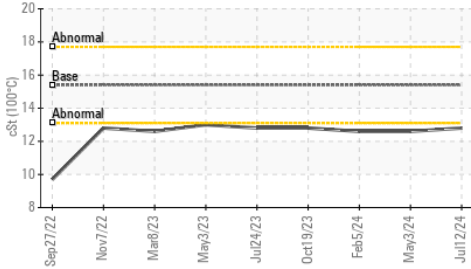

**Viscosity @ 100°C**

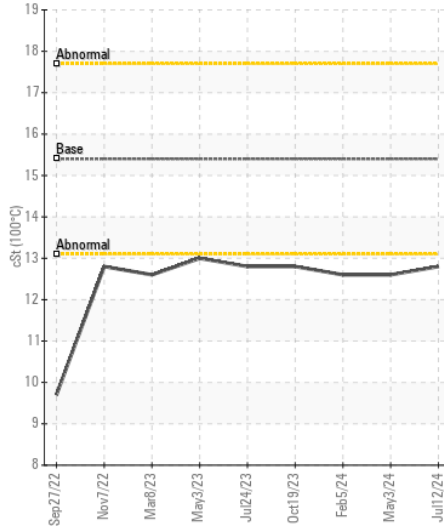

**Base Number**

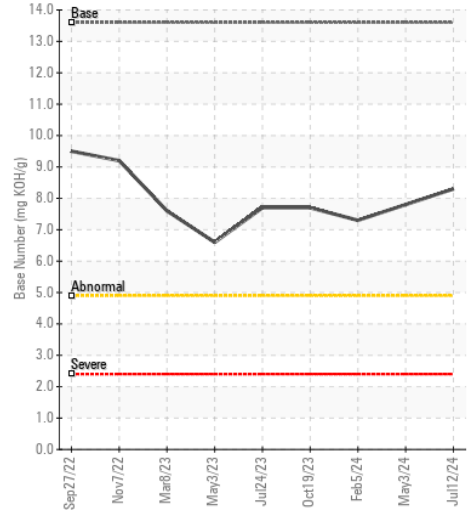

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0221044 **Received** : 16 Jul 2024  
**Lab Number** : 06237558 **Tested** : 17 Jul 2024  
**Unique Number** : 11126392 **Diagnosed** : 18 Jul 2024 - Sean Felton  
**Test Package** : CONST ( Additional Tests: TBN )

**JRE - NEW BERN**  
 3816 MARTIN LUTHER KING BLVD  
 NEW BERN, NC  
 US 28562  
 Contact: NEW BERN SHOP

To discuss this sample report, contact Customer Service at 1-800-237-1369.

nick.etherdridge@jamesriverequipment.com;canastasio@wearcheckusa.com

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

T:

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: