

WEAR ABNORMAL CONTAMINATION NORMAL FLUID CONDITION ATTENTION

[127678] Machine Id JOHN DEERE 470P 1FF470PAHRF000608 Component Diesel Engine Fluid JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (--- QTS)

RECOMMENDATION	Test	UOM	Method	Limit/Abn	Current	History1	History2
Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.	Sample Number		Client Info		WE0007971		
	Sample Date		Client Info		12 Jul 2024		
	Machine Age	hrs	Client Info		578		
	Oil Age	hrs	Client Info		0		
	Filter Age	hrs	Client Info		0		
	Oil Changed		Client Info		Changed		
	Filter Changed		Client Info		Changed		
	Sample Status				ABNORMAL		
WEAR	Iron		ASTM D5185m	. 51	46		
		ppm			46		
The copper level is abnormal. In the absence of other significant wear metals, suspect copper due to sources other than wear (i.e. cooling core). All other component wear rates are normal.	Chromium	ppm	ASTM D5185m		<1		
	Nickel	ppm	ASTM D5185m	>5	0		
	Titanium	ppm	ASTM D5185m	0	7		
	Silver	ppm	ASTM D5185m		0		
	Aluminum	ppm	ASTM D5185m		8		
	Lead	ppm		>26	12		
	Copper	ppm	ASTM D5185m		▲ 310 °		
	Tin	ppm	ASTM D5185m	>4	6		
	Vanadium	ppm	ASTM D5185m		0		
	White Metal	scalar	*Visual	NONE	NONE		
	Yellow Metal	scalar	*Visual	NONE	NONE		
CONTAMINATION	Silicon	ppm	ASTM D5185m	>22	15		
	Potassium	ppm	ASTM D5185m	>20	20		
Fuel content negligible. There is no indication of any contamination in the oil.	Fuel	%	ASTM D3524		0.5		
	Water		WC Method	>0.21	NEG		
	Glycol		WC Method		NEG		
	Soot %	%	*ASTM D7844	>3	0.5		
	Nitration	Abs/cm	*ASTM D7624	>20	9.7		
	Sulfation	Abs/.1mm	*ASTM D7415	>30	24.9		
	Silt	scalar	*Visual	NONE	NONE		
	Debris	scalar	*Visual	NONE	NONE		
	Sand/Dirt	scalar	*Visual	NONE	NONE		
	Appearance	scalar	*Visual	NORML	NORML		
	Odor	scalar	*Visual	NORML	NORML		
	Emulsified Water	scalar	*Visual	>0.21	NEG		
FLUID CONDITION	Sodium	ppm	ASTM D5185m	>31	10		
The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.	Boron	ppm	ASTM D5185m		84		
	Barium	ppm	ASTM D5185m		2		
	Molybdenum	ppm	ASTM D5185m		231		
	Manganese	ppm	ASTM D5185m		11		
	Magnesium	ppm	ASTM D5185m		785		
	Calcium	ppm	ASTM D5185m		1446		
	Phosphorus	ppm	ASTM D5185m		866		
	Zinc	ppm	ASTM D5185m		992		
	Sulfur	ppm	ASTM D5185m		2930		
	Oxidation	Abs/.1mm	*ASTM D7414		19.7		
	Deep Marshar (DM)		AOTH DOOOD	10.0	7.0		


7.8

10.1

Base Number (BN) mg KOH/g ASTM D2896 13.6

ASTM D445 15.4

Visc @ 100°C cSt

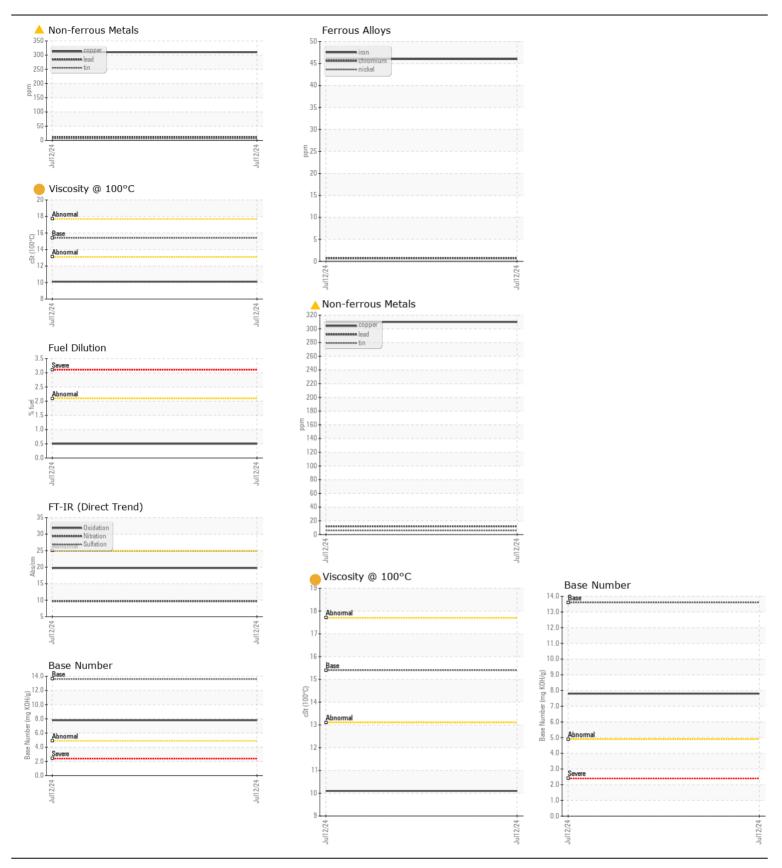

WARRIOR TRACTOR AND EQUIPMENT - NORTHPORT Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513 Sample No. Received P.O. BOX 412 : WE0007971 : 16 Jul 2024 58 Lab Number : 06237564 Tested NORTHPORT, AL : 18 Jul 2024 US 35476 Unique Number : 11126398 Diagnosed : 18 Jul 2024 - Sean Felton Test Package : CONST (Additional Tests: FuelDilution, PercentFuel, TBN) Contact: CRAIG ANDOE Certificate L2367 С serve01@warriortractor.com To discuss this sample report, contact Customer Service at 1-800-237-1369. Æ * - Denotes test methods that are outside of the ISO 17025 scope of accreditation. T: (205)339-0300 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) F:

Contact/Location: CRAIG ANDOE - WARNOR Page 2 of 2