



ASCENDUM

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
Ascendum Machinery/500 Hour CSA
Machine Id
VOLVO L150H 2147 (S/N L150HV6950)
Component
Diesel Engine
Fluid
VOLVO VDS-4.5 Premium Motor Oil 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ASC0009424	ASC0010281	ASC0008909
Sample Date		Client Info		10 Jul 2024	02 Apr 2024	02 Feb 2024
Machine Age	hrs	Client Info		8022	7574	7015
Oil Age	hrs	Client Info		500	500	700
Filter Age	hrs	Client Info		500	500	700
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	3	5	2
Chromium	ppm	ASTM D5185m	>10	<1	<1	<1
Nickel	ppm	ASTM D5185m	>10	0	0	0
Titanium	ppm	ASTM D5185m		0	<1	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>10	3	3	2
Lead	ppm	ASTM D5185m	>20	0	<1	0
Copper	ppm	ASTM D5185m	>15	2	2	<1
Tin	ppm	ASTM D5185m	>10	0	1	0
Vanadium	ppm	ASTM D5185m		0	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>20	3	5	2
Potassium	ppm	ASTM D5185m	>20	2	3	2
Fuel		WC Method	>6.0	<1.0	<1.0	<1.0
Water		WC Method	>0.1	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.1	0.1	0.1
Nitration	Abs/cm	*ASTM D7624	>20	6.4	6.6	6.6
Sulfation	Abs/.1mm	*ASTM D7415	>30	17.6	18.1	18.0
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		0	2	0
Boron	ppm	ASTM D5185m		10	3	4
Barium	ppm	ASTM D5185m		0	0	5
Molybdenum	ppm	ASTM D5185m		58	82	63
Manganese	ppm	ASTM D5185m		0	<1	0
Magnesium	ppm	ASTM D5185m		901	1260	980
Calcium	ppm	ASTM D5185m		1052	1421	1050
Phosphorus	ppm	ASTM D5185m		857	1324	909
Zinc	ppm	ASTM D5185m		1172	1623	1223
Sulfur	ppm	ASTM D5185m		2682	4327	3007
Oxidation	Abs/.1mm	*ASTM D7414	>25	13.0	14.4	14.0
Base Number (BN)	mg KOH/g	ASTM D2896		8.5	8.3	8.4
Visc @ 100°C	cSt	ASTM D445		12.9	13.5	13.2


FT-IR (Direct Trend)

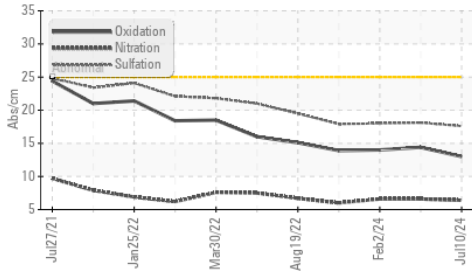


Base Number

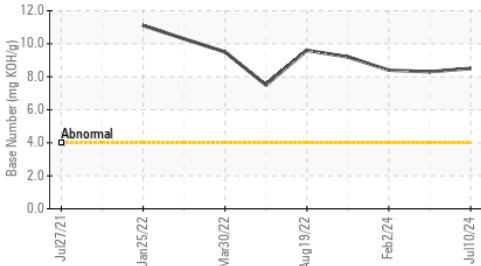


Viscosity @ 100°C

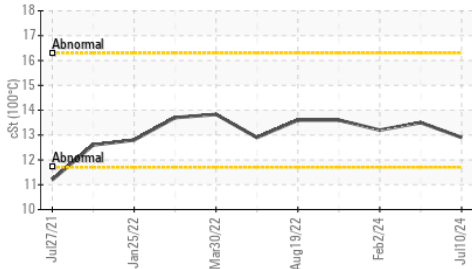


Ferrous Alloys

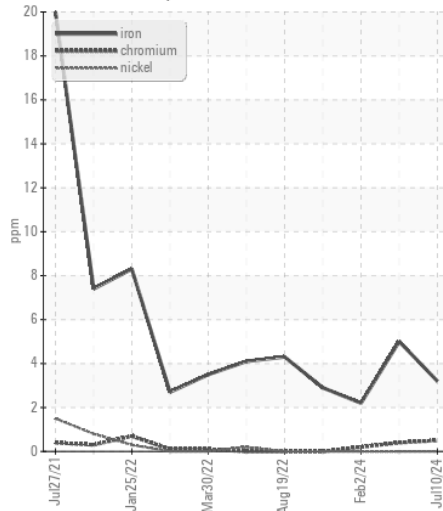


Non-ferrous Metals

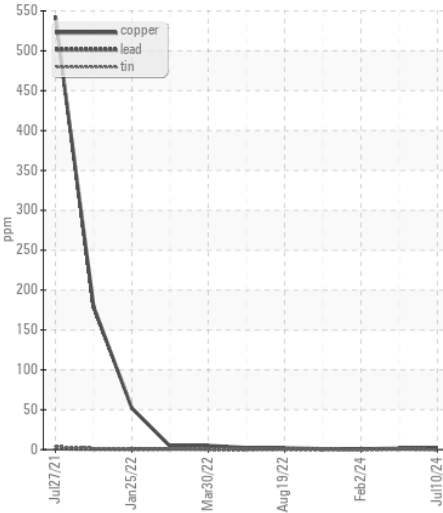

Viscosity @ 100°C

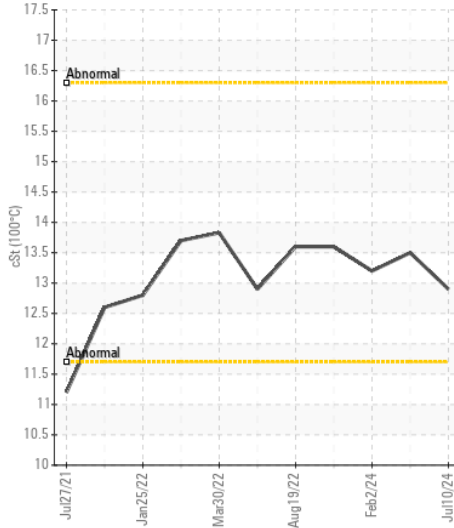

Base Number

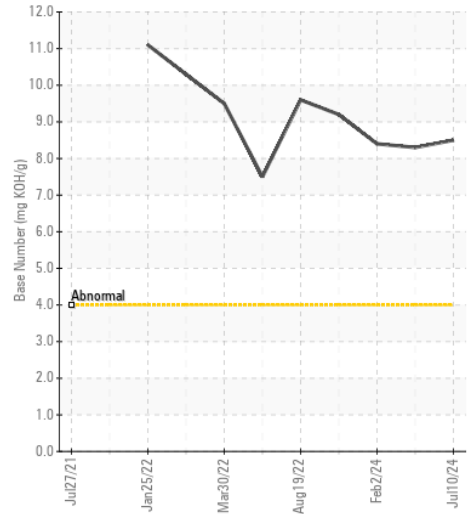

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ASC0009424 **Received** : 16 Jul 2024
Lab Number : 06237592 **Tested** : 17 Jul 2024
Unique Number : 11126426 **Diagnosed** : 18 Jul 2024 - Jonathan Hester
Test Package : CONST (Additional Tests: TBN)

G S MATERIALS INC
 PO BOX 1335
 BURLINGTON, NC
 US 27216

Contact: KAREN NEWPORT
 Gsmaterials@windstream.net
 T: (919)499-9322
 F: (919)499-2097

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)