



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

[872]

Machine ID

LV5300E631619

Component

Diesel Engine

Fluid

JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0222153	---	---
Sample Date		Client Info		10 Jul 2024	---	---
Machine Age	hrs	Client Info		872	---	---
Oil Age	hrs	Client Info		872	---	---
Filter Age	hrs	Client Info		842	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	20	---	---
Chromium	ppm	ASTM D5185m	>20	1	---	---
Nickel	ppm	ASTM D5185m	>4	<1	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m	>3	0	---	---
Aluminum	ppm	ASTM D5185m	>20	3	---	---
Lead	ppm	ASTM D5185m	>40	<1	---	---
Copper	ppm	ASTM D5185m	>330	7	---	---
Tin	ppm	ASTM D5185m	>15	<1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	7	---	---
Potassium	ppm	ASTM D5185m	>20	3	---	---
Fuel		WC Method	>5	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>3	0.1	---	---
Nitration	Abs/cm	*ASTM D7624	>20	8.5	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.1	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		1	---	---
Boron	ppm	ASTM D5185m		89	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		110	---	---
Manganese	ppm	ASTM D5185m		0	---	---
Magnesium	ppm	ASTM D5185m		148	---	---
Calcium	ppm	ASTM D5185m		3154	---	---
Phosphorus	ppm	ASTM D5185m		1123	---	---
Zinc	ppm	ASTM D5185m		1476	---	---
Sulfur	ppm	ASTM D5185m		5241	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	15.7	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	13.6	11.1	---	---
Visc @ 100°C	cSt	ASTM D445	15.4	13.8	---	---

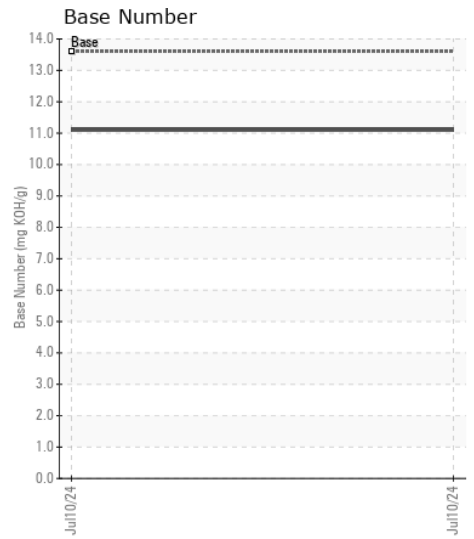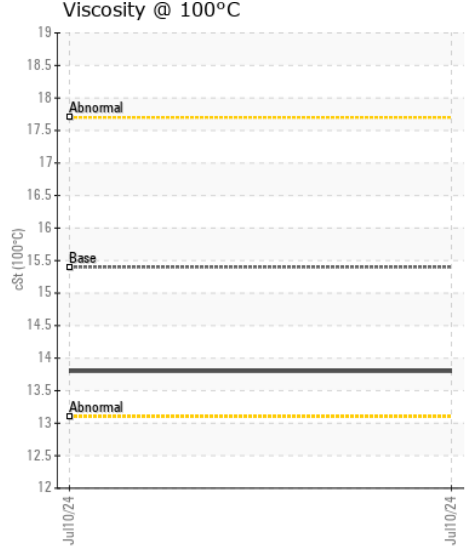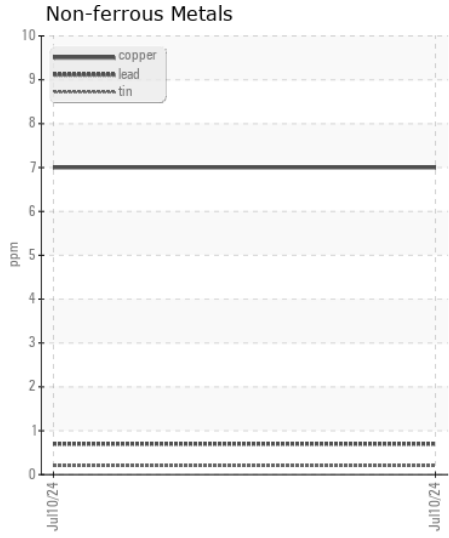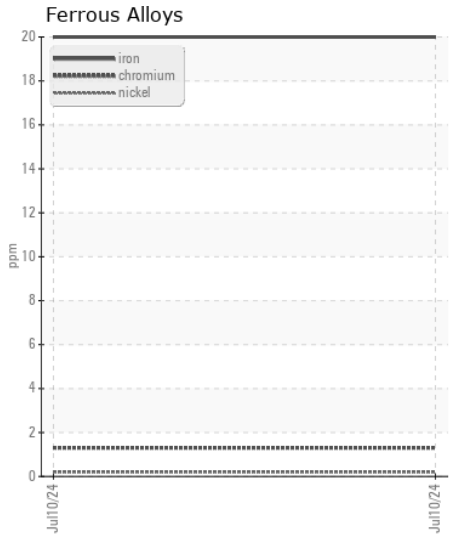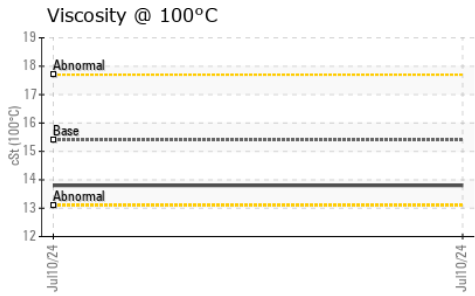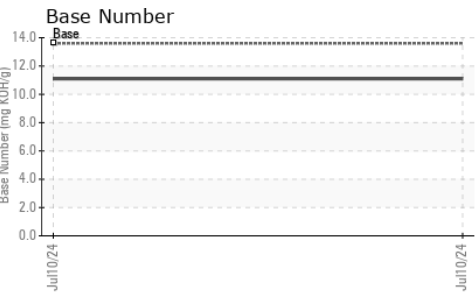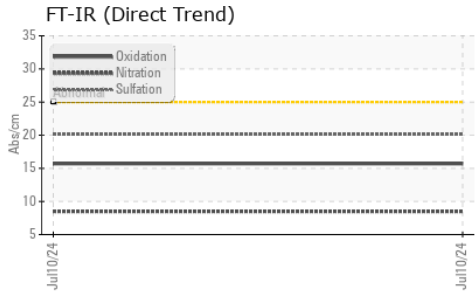

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0222153
Lab Number : 06237637
Unique Number : 11126471
Test Package : CONST (Additional Tests: TBN)

JRE - GARNER
 4161 AUBURN CHURCH RD
 GARNER, NC
 US 27529

To discuss this sample report, contact Customer Service at 1-800-237-1369.

Contact: RALEIGH SHOP
 sean.betts@jamesriverequipment.com; catherine.anastasio@wearcheck.com

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

T: (919)614-2260

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: (919)779-5432