



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 750L 6X67 (S/N 1T0750LXTNF414534)

Component
Transmission (Manual)

Fluid
JOHN DEERE HYDRAU (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0197263	JR0141081	---
Sample Date		Client Info		11 Jul 2024	18 Jul 2023	---
Machine Age	hrs	Client Info		473	289	---
Oil Age	hrs	Client Info		0	0	---
Filter Age	hrs	Client Info		322	0	---
Oil Changed		Client Info		Not Changed	Not Changed	---
Filter Changed		Client Info		Not Changed	N/A	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>95	14	13	---
Iron	ppm	ASTM D5185m	>200	12	8	---
Chromium	ppm	ASTM D5185m	>5	0	0	---
Nickel	ppm	ASTM D5185m	>5	0	0	---
Titanium	ppm	ASTM D5185m		0	0	---
Silver	ppm	ASTM D5185m	>7	0	0	---
Aluminum	ppm	ASTM D5185m	>25	0	0	---
Lead	ppm	ASTM D5185m	>45	0	<1	---
Copper	ppm	ASTM D5185m	>225	10	10	---
Tin	ppm	ASTM D5185m	>10	0	0	---
Vanadium	ppm	ASTM D5185m		0	<1	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION











There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>125	1	1	---
Potassium	ppm	ASTM D5185m	>20	<1	<1	---
Water		WC Method	>0.1	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	---

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		2	2	---
Boron	ppm	ASTM D5185m		0	<1	---
Barium	ppm	ASTM D5185m		<1	0	---
Molybdenum	ppm	ASTM D5185m		0	<1	---
Manganese	ppm	ASTM D5185m		<1	<1	---
Magnesium	ppm	ASTM D5185m		1	7	---
Calcium	ppm	ASTM D5185m	87	94	125	---
Phosphorus	ppm	ASTM D5185m	727	637	617	---
Zinc	ppm	ASTM D5185m	900	799	847	---
Sulfur	ppm	ASTM D5185m	1500	1804	1894	---
Visc @ 40°C	cSt	ASTM D445	65	58.0	57.7	---

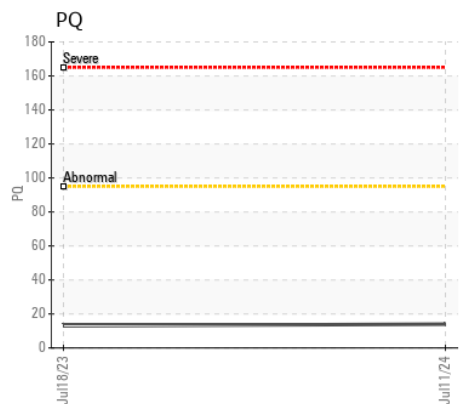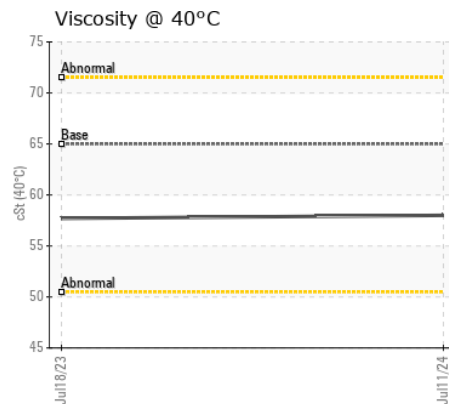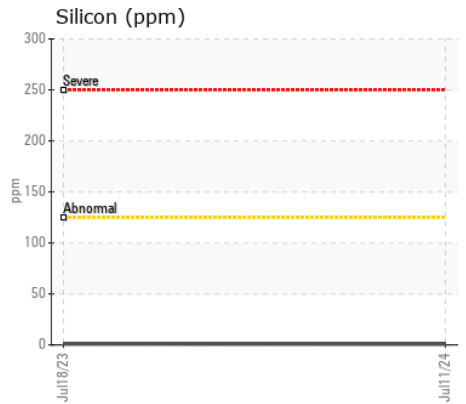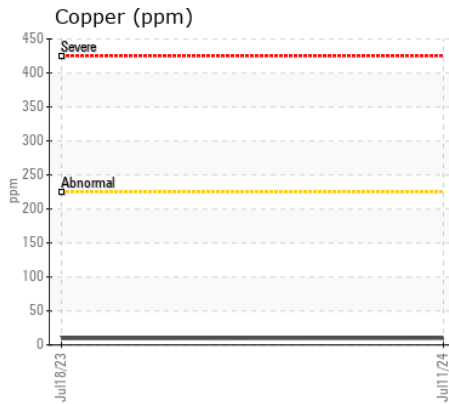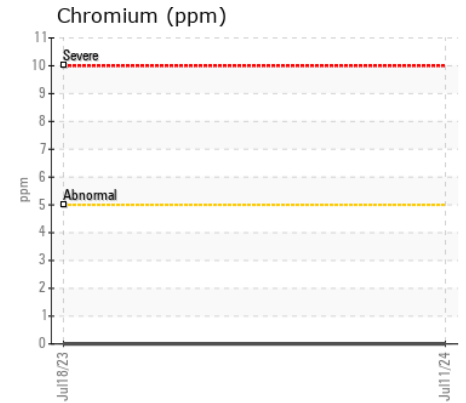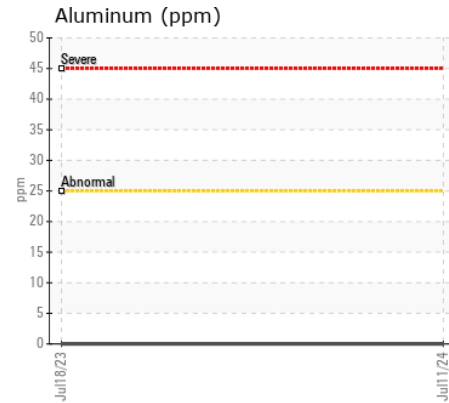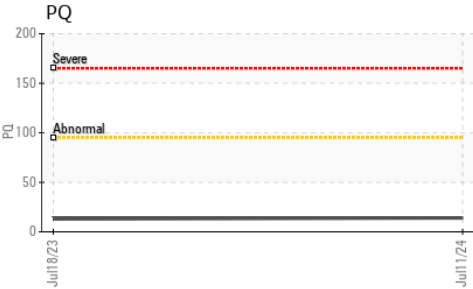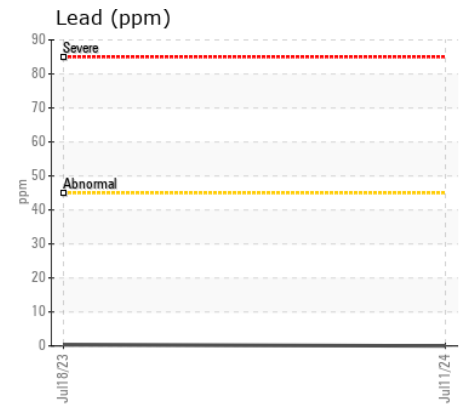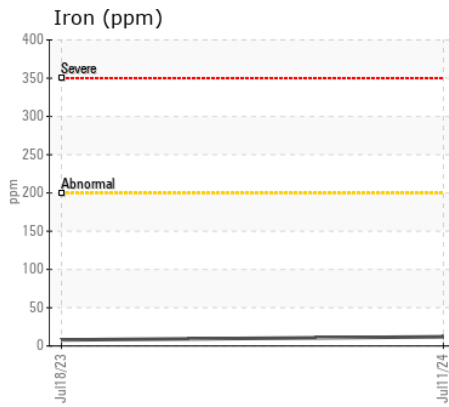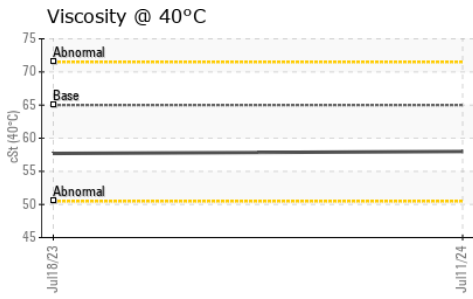

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0197263 **Received** : 16 Jul 2024
Lab Number : 06238022 **Tested** : 17 Jul 2024
Unique Number : 11126856 **Diagnosed** : 17 Jul 2024 - Wes Davis
Test Package : MOBCE (Additional Tests: PQ)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

NC FOREST SERVICE
 221 AIRPORT RD
 FAYETTEVILLE, NC
 US 28306

Contact: WALTER CAPPS
 WATER.CAPPS@NCAGR.GOV

T:
 F: