



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Area  
**[48053]**  
Machine Id  
**JOHN DEERE 755K 1T0755KXEMF403799**  
Component  
**Hydrostatic**  
Fluid  
**JOHN DEERE HYDRAU (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0225479</b>	JR0203258	---
Sample Date		Client Info		<b>15 Jul 2024</b>	19 Feb 2024	---
Machine Age	hrs	Client Info		<b>3402</b>	2923	---
Oil Age	hrs	Client Info		<b>3402</b>	2408	---
Filter Age	hrs	Client Info		<b>0</b>	2408	---
Oil Changed		Client Info		<b>Not Changd</b>	Not Changd	---
Filter Changed		Client Info		<b>Not Changd</b>	Not Changd	---
Sample Status				<b>NORMAL</b>	NORMAL	---

### WEAR

All component wear rates are normal.

PQ		ASTM D8184		<b>18</b>	14	---
Iron	ppm	ASTM D5185m	>31	<b>7</b>	4	---
Chromium	ppm	ASTM D5185m	>9	<b>0</b>	<1	---
Nickel	ppm	ASTM D5185m	>5	<b>0</b>	0	---
Titanium	ppm	ASTM D5185m		<b>0</b>	0	---
Silver	ppm	ASTM D5185m		<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>10	<b>0</b>	1	---
Lead	ppm	ASTM D5185m	>11	<b>0</b>	<1	---
Copper	ppm	ASTM D5185m	>41	<b>3</b>	2	---
Tin	ppm	ASTM D5185m	>5	<b>0</b>	0	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

### CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>31	<b>&lt;1</b>	<1	---
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	2	---
Water		WC Method	>0.1	<b>NEG</b>	NEG	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	---

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>21	<b>2</b>	0	---
Boron	ppm	ASTM D5185m		<b>4</b>	3	---
Barium	ppm	ASTM D5185m		<b>0</b>	3	---
Molybdenum	ppm	ASTM D5185m		<b>7</b>	8	---
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Magnesium	ppm	ASTM D5185m		<b>40</b>	43	---
Calcium	ppm	ASTM D5185m	87	<b>388</b>	347	---
Phosphorus	ppm	ASTM D5185m	727	<b>516</b>	475	---
Zinc	ppm	ASTM D5185m	900	<b>606</b>	652	---
Sulfur	ppm	ASTM D5185m	1500	<b>1628</b>	1355	---
Visc @ 40°C	cSt	ASTM D445	65	<b>50.2</b>	51.3	---

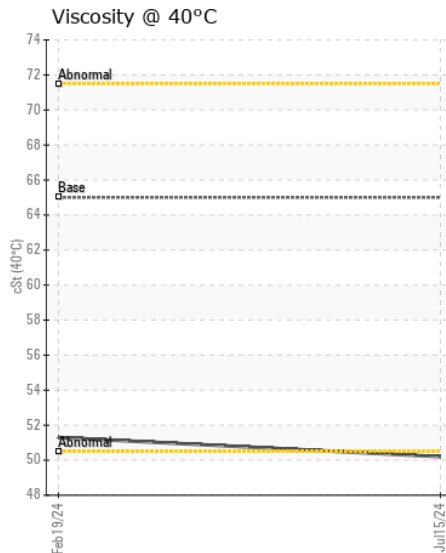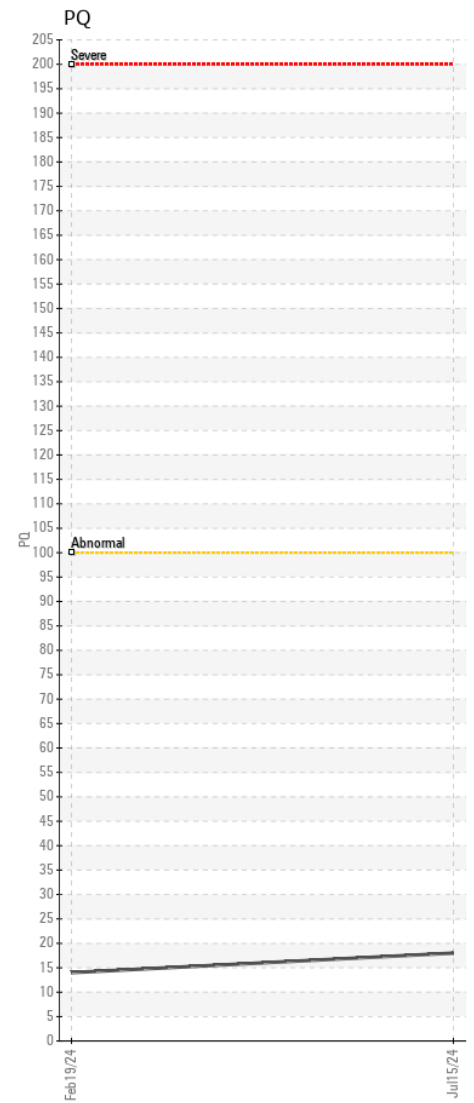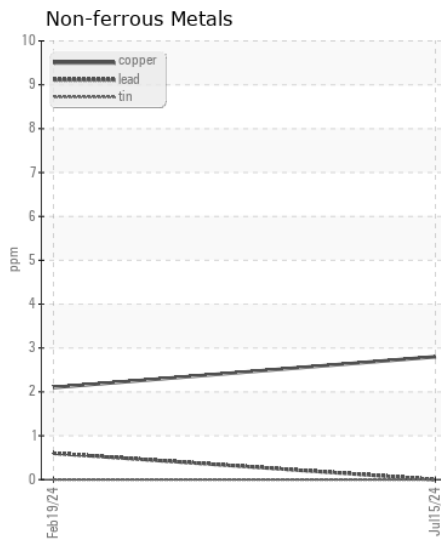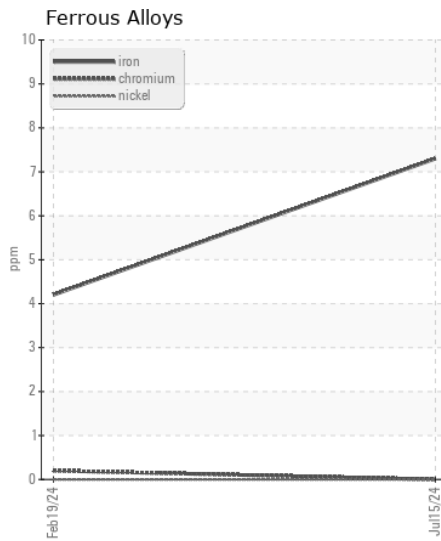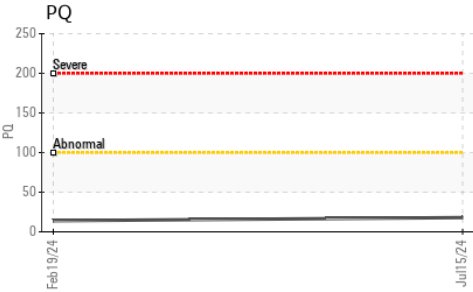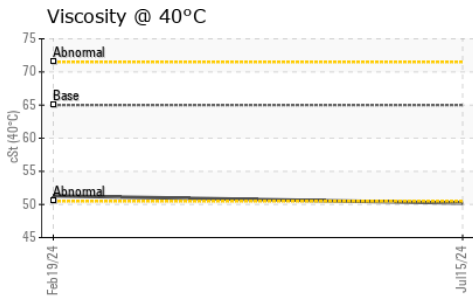

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513

**Sample No.** : JR0225479

**Lab Number** : 06238036

**Unique Number** : 11126870

**Test Package** : CONST ( Additional Tests: PQ )

**Received** : 16 Jul 2024

**Tested** : 17 Jul 2024

**Diagnosed** : 17 Jul 2024 - Wes Davis

**CWS-STRITTMATTER**

9102 OWENS DR

MANASSAS PARK, VA

US 20111

Contact: EDDIE GARRETSON

egarretson@strittmattercompanies.com

T: (703)335-2255

F: (703)335-8095

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)