



WEAR	NORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 750L 6X67 (S/N 1T0750LXTNF414534)
 Component
Right Final Drive
 Fluid
JOHN DEERE HY-GARD HYD/TRANS (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

WEAR

All component wear rates are normal.












CONTAMINATION

There is a light concentration of water present in the oil.

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0197265	---	---
Sample Date		Client Info		11 Jul 2024	---	---
Machine Age	hrs	Client Info		473	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Not Changd	---	---
Filter Changed		Client Info		Not Changd	---	---
Sample Status				ABNORMAL	---	---
PQ		ASTM D8184	>1250	44	---	---
Iron	ppm	ASTM D5185m	>750	103	---	---
Chromium	ppm	ASTM D5185m	>9	1	---	---
Nickel	ppm	ASTM D5185m	>10	<1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>40	3	---	---
Lead	ppm	ASTM D5185m	>15	0	---	---
Copper	ppm	ASTM D5185m	>40	<1	---	---
Tin	ppm	ASTM D5185m	>10	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Silicon	ppm	ASTM D5185m	>75	33	---	---
Potassium	ppm	ASTM D5185m	>20	4	---	---
Water	%	ASTM D6304	>0.075	▲ 0.358	---	---
ppm Water	ppm	ASTM D6304	>750	▲ 3580	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.075	0.2%	---	---
Sodium	ppm	ASTM D5185m	>51	0	---	---
Boron	ppm	ASTM D5185m	6	3	---	---
Barium	ppm	ASTM D5185m	0	0	---	---
Molybdenum	ppm	ASTM D5185m	0	<1	---	---
Manganese	ppm	ASTM D5185m		1	---	---
Magnesium	ppm	ASTM D5185m	145	103	---	---
Calcium	ppm	ASTM D5185m	3570	3420	---	---
Phosphorus	ppm	ASTM D5185m	1290	879	---	---
Zinc	ppm	ASTM D5185m	1640	1246	---	---
Sulfur	ppm	ASTM D5185m		3348	---	---
Visc @ 40°C	cSt	ASTM D445	57.0	54.2	---	---

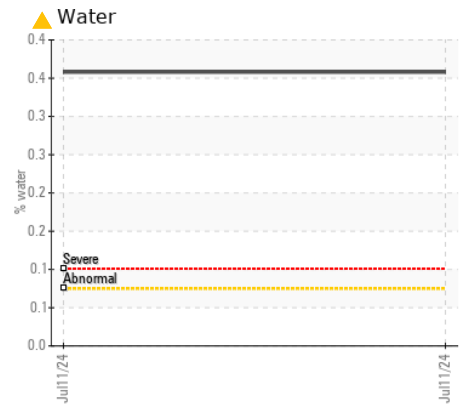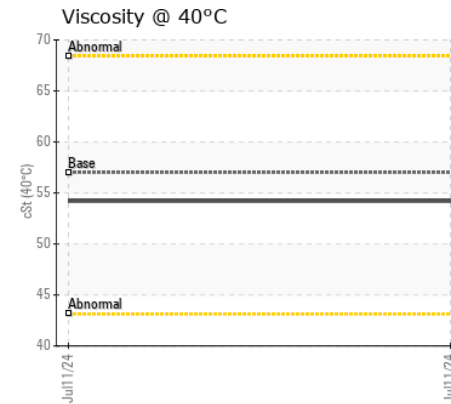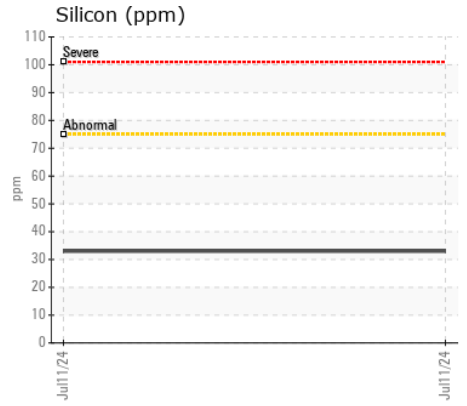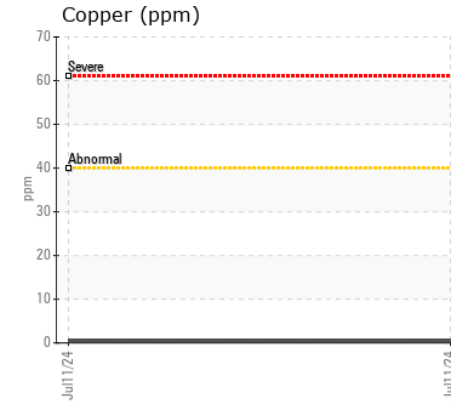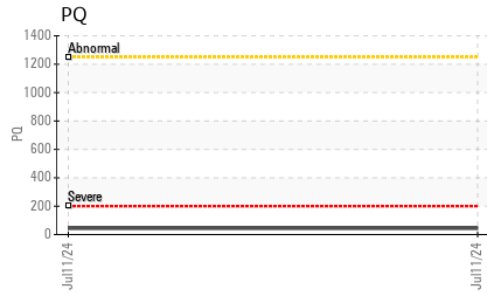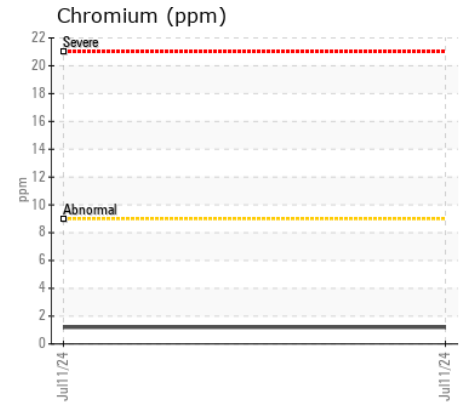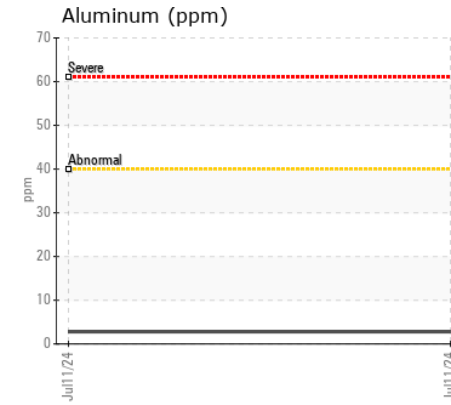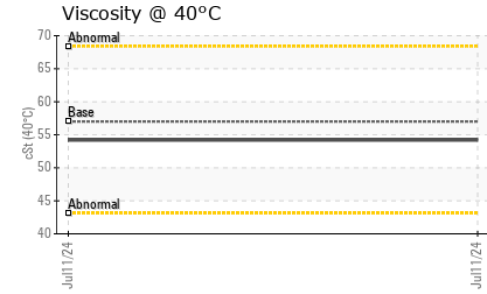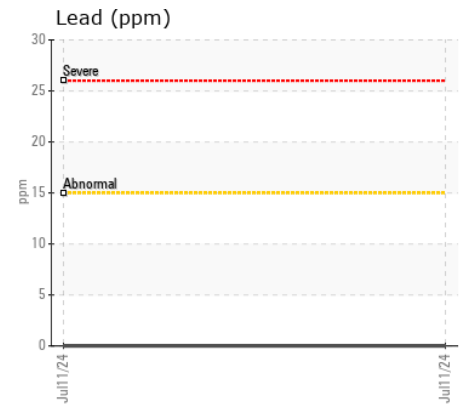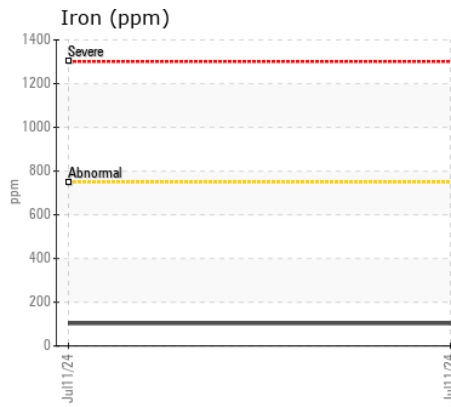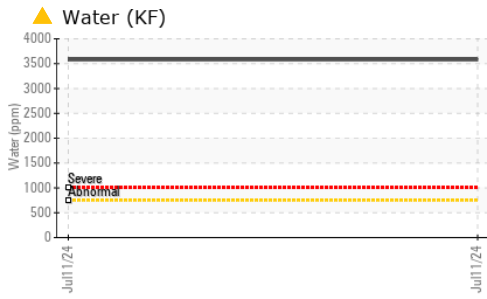

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0197265 **Received** : 16 Jul 2024
Lab Number : 06238051 **Tested** : 17 Jul 2024
Unique Number : 11126885 **Diagnosed** : 18 Jul 2024 - Don Baldrige
Test Package : MOBCE (Additional Tests: KF, PQ)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

NC FOREST SERVICE
 221 AIRPORT RD
 FAYETTEVILLE, NC
 US 28306

Contact: WALTER CAPPS
 WATER.CAPPS@NCAGR.GOV

T:
 F: