



Machine Id
JOHN DEERE 700K 6X45 (S/N 1T0700KXTKF364911)
 Component
Left Final Drive
 Fluid
JOHN DEERE HY-GARD HYD/TRANS (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|----------------|-----|-------------|-----------|--------------------|----------|----------|
| Sample Number | | Client Info | | JR0197277 | --- | --- |
| Sample Date | | Client Info | | 12 Jul 2024 | --- | --- |
| Machine Age | hrs | Client Info | | 518 | --- | --- |
| Oil Age | hrs | Client Info | | 0 | --- | --- |
| Filter Age | hrs | Client Info | | 0 | --- | --- |
| Oil Changed | | Client Info | | Not Changed | --- | --- |
| Filter Changed | | Client Info | | Not Changed | --- | --- |
| Sample Status | | | | NORMAL | --- | --- |

WEAR

All component wear rates are normal.

| | | | | | | |
|--------------|--------|-------------|-------|--------------|-----|-----|
| PQ | | ASTM D8184 | >1250 | 31 | --- | --- |
| Iron | ppm | ASTM D5185m | >750 | 62 | --- | --- |
| Chromium | ppm | ASTM D5185m | >9 | <1 | --- | --- |
| Nickel | ppm | ASTM D5185m | >10 | 0 | --- | --- |
| Titanium | ppm | ASTM D5185m | | 0 | --- | --- |
| Silver | ppm | ASTM D5185m | | 0 | --- | --- |
| Aluminum | ppm | ASTM D5185m | >40 | 3 | --- | --- |
| Lead | ppm | ASTM D5185m | >15 | <1 | --- | --- |
| Copper | ppm | ASTM D5185m | >40 | 4 | --- | --- |
| Tin | ppm | ASTM D5185m | >10 | 0 | --- | --- |
| Vanadium | ppm | ASTM D5185m | | 0 | --- | --- |
| White Metal | scalar | *Visual | NONE | NONE | --- | --- |
| Yellow Metal | scalar | *Visual | NONE | NONE | --- | --- |

CONTAMINATION











There is no indication of any contamination in the oil.

| | | | | | | |
|------------------|--------|-------------|--------|--------------|-----|-----|
| Silicon | ppm | ASTM D5185m | >75 | 34 | --- | --- |
| Potassium | ppm | ASTM D5185m | >20 | 11 | --- | --- |
| Water | | WC Method | >0.075 | NEG | --- | --- |
| Silt | scalar | *Visual | NONE | NONE | --- | --- |
| Debris | scalar | *Visual | NONE | NONE | --- | --- |
| Sand/Dirt | scalar | *Visual | NONE | NONE | --- | --- |
| Appearance | scalar | *Visual | NORML | NORML | --- | --- |
| Odor | scalar | *Visual | NORML | NORML | --- | --- |
| Emulsified Water | scalar | *Visual | >0.075 | NEG | --- | --- |

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

| | | | | | | |
|-------------|-----|-------------|------|--------------|-----|-----|
| Sodium | ppm | ASTM D5185m | >51 | 2 | --- | --- |
| Boron | ppm | ASTM D5185m | 6 | 2 | --- | --- |
| Barium | ppm | ASTM D5185m | 0 | 0 | --- | --- |
| Molybdenum | ppm | ASTM D5185m | 0 | <1 | --- | --- |
| Manganese | ppm | ASTM D5185m | | 3 | --- | --- |
| Magnesium | ppm | ASTM D5185m | 145 | 102 | --- | --- |
| Calcium | ppm | ASTM D5185m | 3570 | 3400 | --- | --- |
| Phosphorus | ppm | ASTM D5185m | 1290 | 869 | --- | --- |
| Zinc | ppm | ASTM D5185m | 1640 | 1219 | --- | --- |
| Sulfur | ppm | ASTM D5185m | | 3200 | --- | --- |
| Visc @ 40°C | cSt | ASTM D445 | 57.0 | 52.9 | --- | --- |

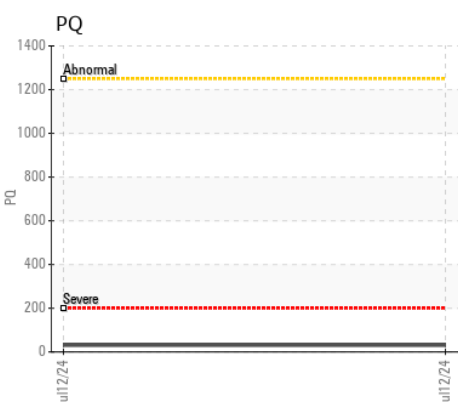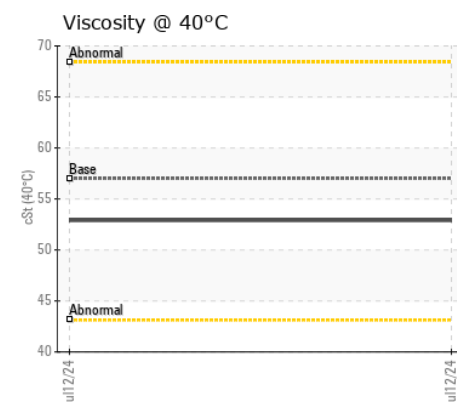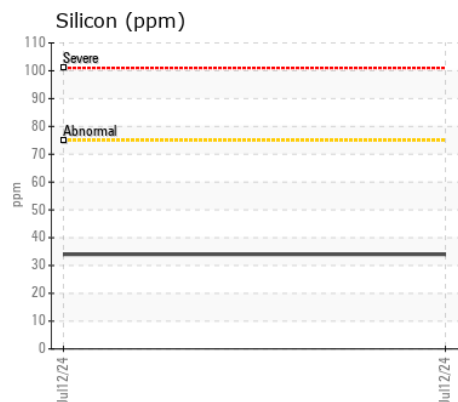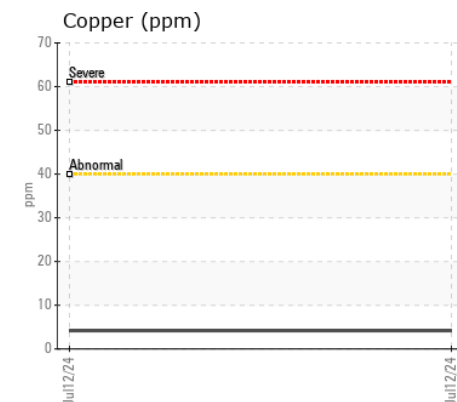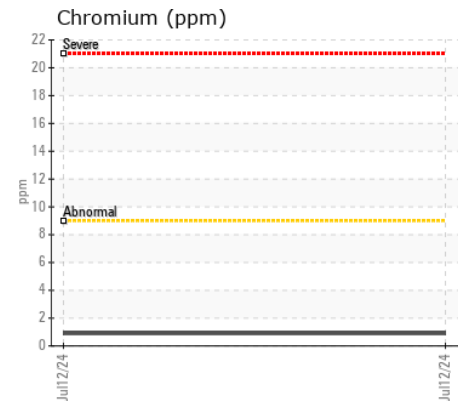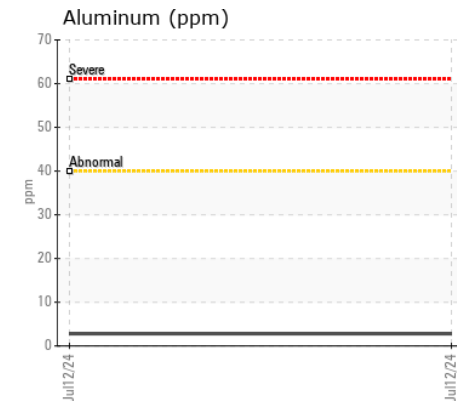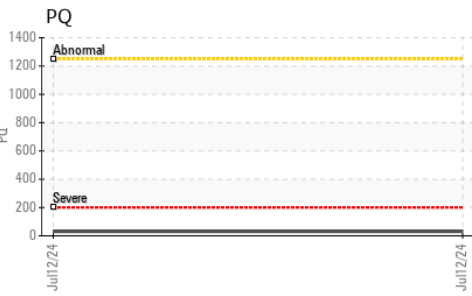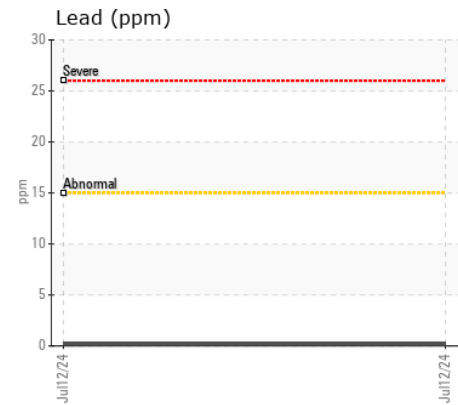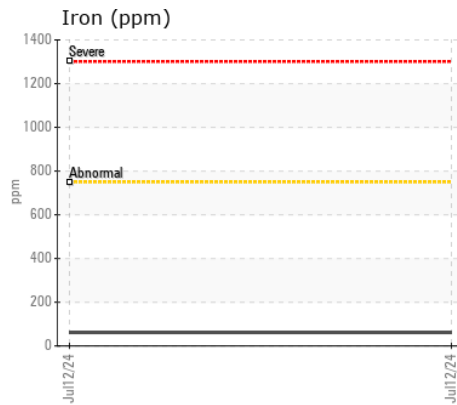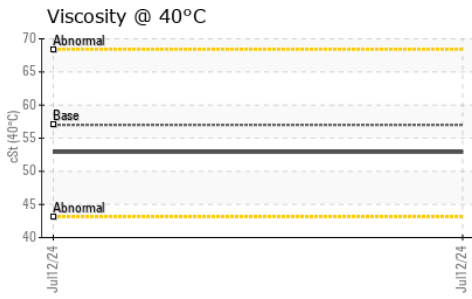

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0197277 **Received** : 16 Jul 2024
Lab Number : 06238053 **Tested** : 17 Jul 2024
Unique Number : 11126887 **Diagnosed** : 17 Jul 2024 - Wes Davis
Test Package : MOBCE (Additional Tests: PQ)

NC FOREST SERVICE
 221 AIRPORT RD
 FAYETTEVILLE, NC
 US 28306
 Contact: WALTER CAPPS
 WATER.CAPPS@NCAGR.GOV
 T:
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)