



OIL ANALYSIS REPORT

| | |
|-----------------|---------------|
| WEAR | NORMAL |
| CONTAMINATION | NORMAL |
| FLUID CONDITION | NORMAL |

Area

[127678]

Machine Id

JOHN DEERE 470P 1FF470PAHRF000608

Component

Right Final Drive

Fluid

JOHN DEERE GL-5 80W90 (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|----------------|-----|-------------|-----------|--------------------|----------|----------|
| Sample Number | | Client Info | | WE0007880 | --- | --- |
| Sample Date | | Client Info | | 12 Jul 2024 | --- | --- |
| Machine Age | hrs | Client Info | | 578 | --- | --- |
| Oil Age | hrs | Client Info | | 0 | --- | --- |
| Filter Age | hrs | Client Info | | 0 | --- | --- |
| Oil Changed | | Client Info | | N/A | --- | --- |
| Filter Changed | | Client Info | | N/A | --- | --- |
| Sample Status | | | | NORMAL | --- | --- |

WEAR

All component wear rates are normal.

| | | | | | | |
|--------------|--------|-------------|-------|--------------|-----|-----|
| PQ | | ASTM D8184 | >1250 | 84 | --- | --- |
| Iron | ppm | ASTM D5185m | >750 | 102 | --- | --- |
| Chromium | ppm | ASTM D5185m | >9 | 3 | --- | --- |
| Nickel | ppm | ASTM D5185m | >10 | 0 | --- | --- |
| Titanium | ppm | ASTM D5185m | | 0 | --- | --- |
| Silver | ppm | ASTM D5185m | | 0 | --- | --- |
| Aluminum | ppm | ASTM D5185m | >40 | 3 | --- | --- |
| Lead | ppm | ASTM D5185m | >15 | 0 | --- | --- |
| Copper | ppm | ASTM D5185m | >40 | <1 | --- | --- |
| Tin | ppm | ASTM D5185m | >10 | 0 | --- | --- |
| Vanadium | ppm | ASTM D5185m | | 0 | --- | --- |
| White Metal | scalar | *Visual | NONE | NONE | --- | --- |
| Yellow Metal | scalar | *Visual | NONE | NONE | --- | --- |

CONTAMINATION







There is no indication of any contamination in the oil.

| | | | | | | |
|------------------|--------|-------------|--------|--------------|-----|-----|
| Silicon | ppm | ASTM D5185m | >75 | 9 | --- | --- |
| Potassium | ppm | ASTM D5185m | >20 | 8 | --- | --- |
| Water | | WC Method | >0.075 | NEG | --- | --- |
| Silt | scalar | *Visual | NONE | NONE | --- | --- |
| Debris | scalar | *Visual | NONE | LIGHT | --- | --- |
| Sand/Dirt | scalar | *Visual | NONE | NONE | --- | --- |
| Appearance | scalar | *Visual | NORML | NORML | --- | --- |
| Odor | scalar | *Visual | NORML | NORML | --- | --- |
| Emulsified Water | scalar | *Visual | >0.075 | NEG | --- | --- |

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

| | | | | | | |
|-------------|-----|-------------|-----|--------------|-----|-----|
| Sodium | ppm | ASTM D5185m | >51 | 0 | --- | --- |
| Boron | ppm | ASTM D5185m | | 62 | --- | --- |
| Barium | ppm | ASTM D5185m | | 8 | --- | --- |
| Molybdenum | ppm | ASTM D5185m | | 0 | --- | --- |
| Manganese | ppm | ASTM D5185m | | 6 | --- | --- |
| Magnesium | ppm | ASTM D5185m | | 3 | --- | --- |
| Calcium | ppm | ASTM D5185m | | 44 | --- | --- |
| Phosphorus | ppm | ASTM D5185m | | 481 | --- | --- |
| Zinc | ppm | ASTM D5185m | | 42 | --- | --- |
| Sulfur | ppm | ASTM D5185m | | 14475 | --- | --- |
| Visc @ 40°C | cSt | ASTM D445 | | 179 | --- | --- |

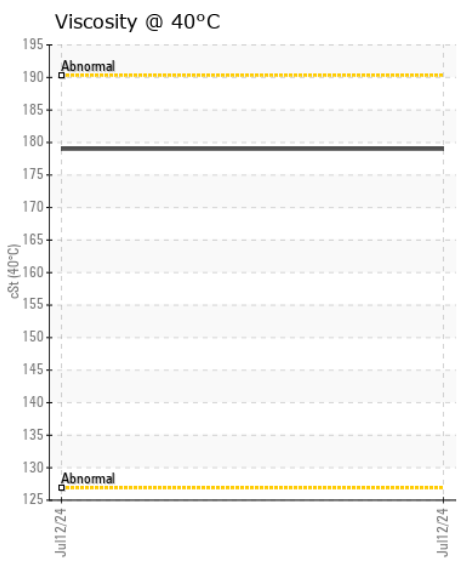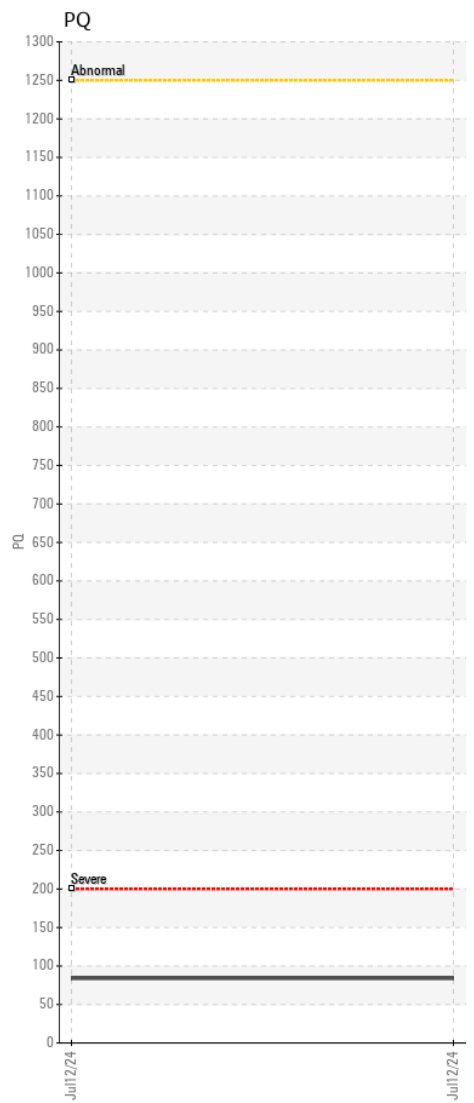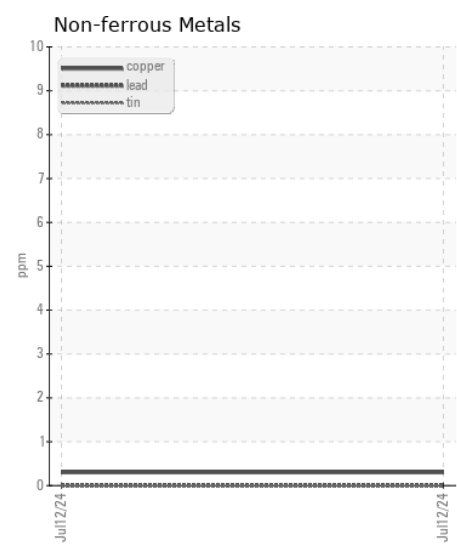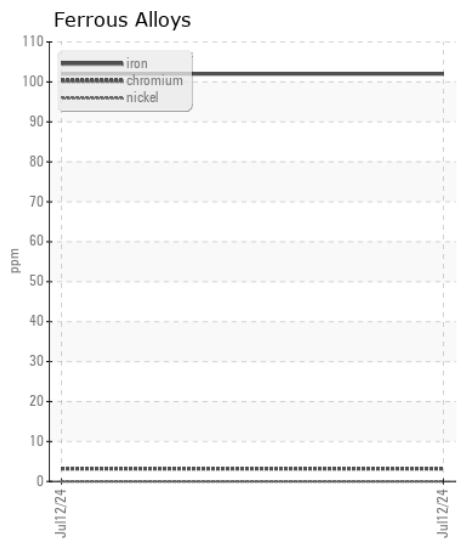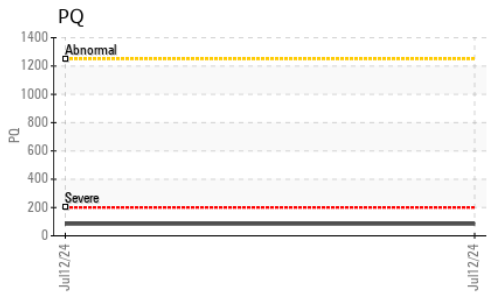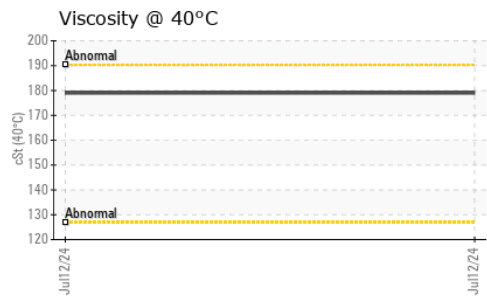

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WE0007880 **Received** : 16 Jul 2024
Lab Number : 06238069 **Tested** : 17 Jul 2024
Unique Number : 11126903 **Diagnosed** : 18 Jul 2024 - Don Baldrige
Test Package : CONST (Additional Tests: PQ)

WARRIOR TRACTOR AND EQUIPMENT - NORTHPORT
 P.O. BOX 412
 NORTHPORT, AL
 US 35476
 Contact: PAMELA CLARK
 pamela@warriortractor.com
 T: (205)339-0300
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)