



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

[W9170]

Machine Id

JOHN DEERE 750L 1T0750LXEPF449557

Component

Left Outer Final Drive

Fluid

JOHN DEERE HY-GARD HYD/TRANS (4 GAL)

RECOMMENDATION

Resample at the next service interval to monitor. (Customer Sample Comment: W9170)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0224143	JR0202485	---
Sample Date		Client Info		11 Jul 2024	09 Apr 2024	---
Machine Age	hrs	Client Info		1565	1198	---
Oil Age	hrs	Client Info		367	1198	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Not Chngd	Changed	---
Filter Changed		Client Info		N/A	N/A	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>1250	30	91	---
Iron	ppm	ASTM D5185m	>750	27	108	---
Chromium	ppm	ASTM D5185m	>9	<1	<1	---
Nickel	ppm	ASTM D5185m	>10	0	<1	---
Titanium	ppm	ASTM D5185m		<1	<1	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>40	3	12	---
Lead	ppm	ASTM D5185m	>15	0	<1	---
Copper	ppm	ASTM D5185m	>40	0	<1	---
Tin	ppm	ASTM D5185m	>10	0	0	---
Vanadium	ppm	ASTM D5185m		0	<1	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	13	30	---
Potassium	ppm	ASTM D5185m	>20	2	0	---
Water		WC Method	>0.075	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.075	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	0	2	---
Boron	ppm	ASTM D5185m	6	2	1	---
Barium	ppm	ASTM D5185m	0	0	6	---
Molybdenum	ppm	ASTM D5185m	0	0	<1	---
Manganese	ppm	ASTM D5185m		0	1	---
Magnesium	ppm	ASTM D5185m	145	100	101	---
Calcium	ppm	ASTM D5185m	3570	3403	3432	---
Phosphorus	ppm	ASTM D5185m	1290	856	987	---
Zinc	ppm	ASTM D5185m	1640	1230	1146	---
Sulfur	ppm	ASTM D5185m		3272	4080	---
Visc @ 40°C	cSt	ASTM D445	57.0	54.8	53.8	---

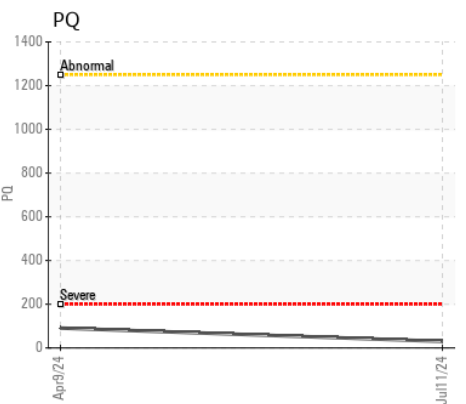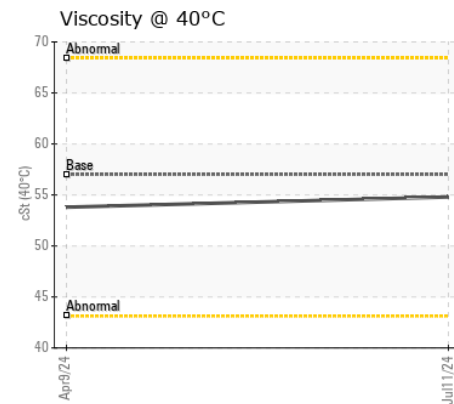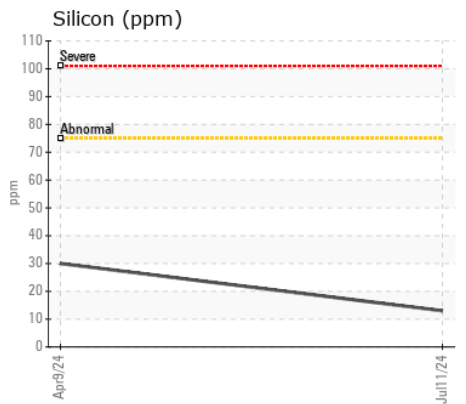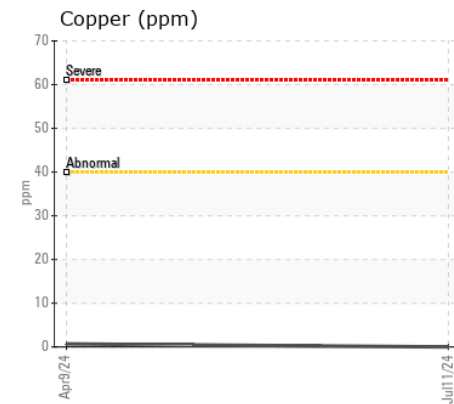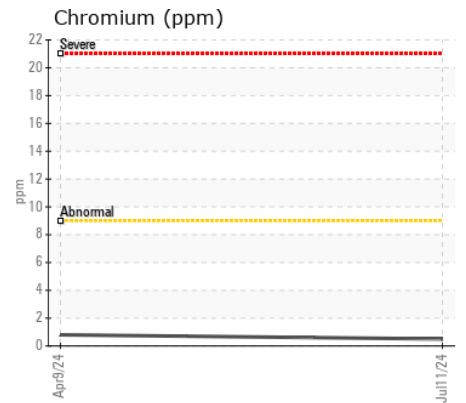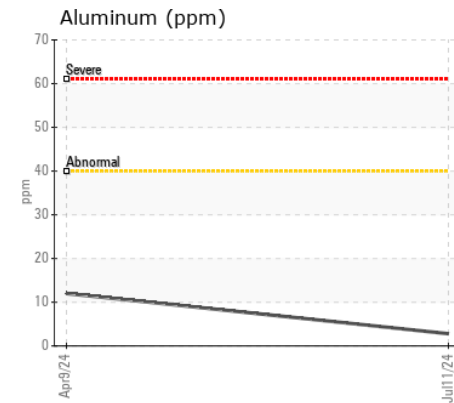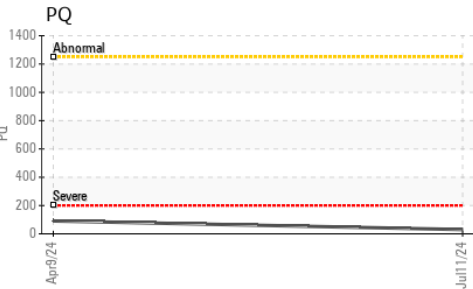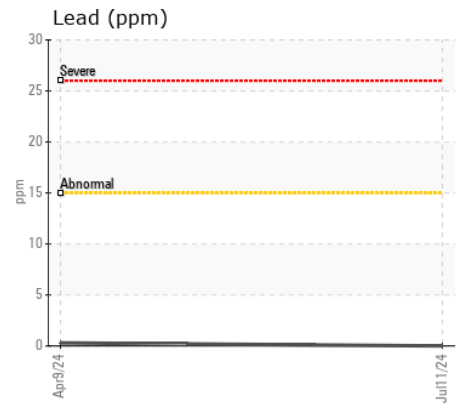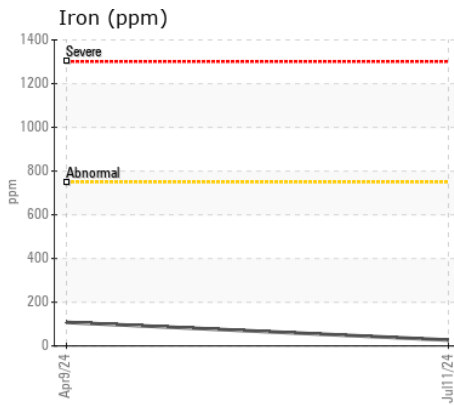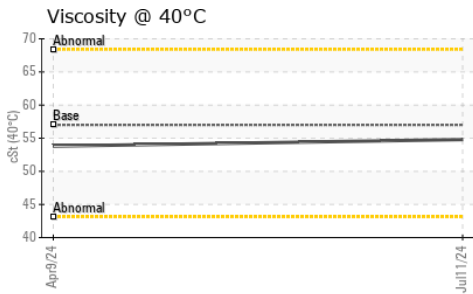

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : JR0224143

Lab Number : 06238120

Unique Number : 11126954

Test Package : MOBCE (Additional Tests: PQ)

Received : 16 Jul 2024

Tested : 17 Jul 2024

Diagnosed : 18 Jul 2024 - Don Baldridge

JRE - HOPE MILLS/FAYETTEVILLE

5039 HWY 301 SOUTH

HOPE MILLS, NC

US 28348

Contact: FAYETTEVILLE SHOP

stephen.mullis@jamesriverequipment.com;canastasio@wearcheck.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:

F: