



OIL ANALYSIS REPORT

WEAR	ABNORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

[W9159]

Machine Id

BOMAG BC973RB-5 101930611002

Component

Rear Right Final Drive

Fluid

JOHN DEERE GL-5 85W140LS (4 GAL)

RECOMMENDATION

The oil change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor. (Customer Sample Comment: W9159)

WEAR

Gear wear is indicated. All other component wear rates are normal.

CONTAMINATION

There is no indication of any contamination in the oil.

FLUID CONDITION

The condition of the oil is acceptable for the time in service.


Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0224160	JR0197194	JR0197153
Sample Date		Client Info		12 Jul 2024	24 Apr 2024	02 Feb 2024
Machine Age	hrs	Client Info		4008	3531	2514
Oil Age	hrs	Client Info		2991	1017	1011
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Not Chngd	Changed
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				ABNORMAL	NORMAL	NORMAL

PQ		ASTM D8184		29	33	92
Iron	ppm	ASTM D5185m	>500	▲ 637	269	228
Chromium	ppm	ASTM D5185m	>10	6	2	<1
Nickel	ppm	ASTM D5185m	>10	2	<1	0
Titanium	ppm	ASTM D5185m		<1	1	<1
Silver	ppm	ASTM D5185m		0	<1	0
Aluminum	ppm	ASTM D5185m	>25	3	2	2
Lead	ppm	ASTM D5185m	>25	0	2	0
Copper	ppm	ASTM D5185m	>50	22	9	11
Tin	ppm	ASTM D5185m	>10	0	<1	0
Vanadium	ppm	ASTM D5185m		0	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE


Silicon	ppm	ASTM D5185m	>75	9	8	5
Potassium	ppm	ASTM D5185m	>20	<1	2	<1
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

Sodium	ppm	ASTM D5185m		0	0	0
Boron	ppm	ASTM D5185m		10	13	44
Barium	ppm	ASTM D5185m		0	0	2
Molybdenum	ppm	ASTM D5185m		<1	<1	0
Manganese	ppm	ASTM D5185m		3	1	<1
Magnesium	ppm	ASTM D5185m		<1	3	0
Calcium	ppm	ASTM D5185m		0	50	4
Phosphorus	ppm	ASTM D5185m		260	371	357
Zinc	ppm	ASTM D5185m		4	12	0
Sulfur	ppm	ASTM D5185m		19787	22885	21682
Visc @ 40°C	cSt	ASTM D445	350.7	352	363	362


▲ Ferrous Alloys

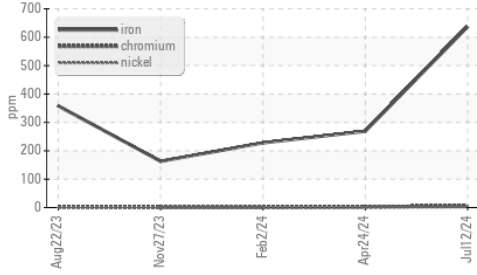


Viscosity @ 40°C

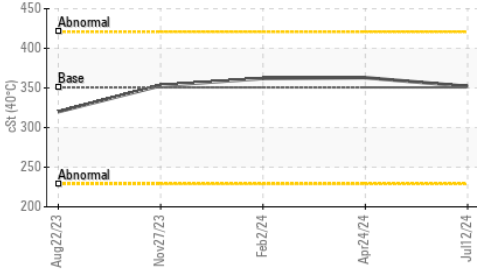


PQ

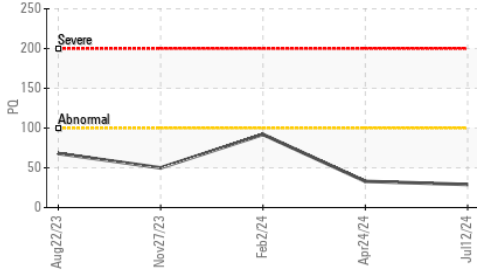


▲ Iron (ppm)

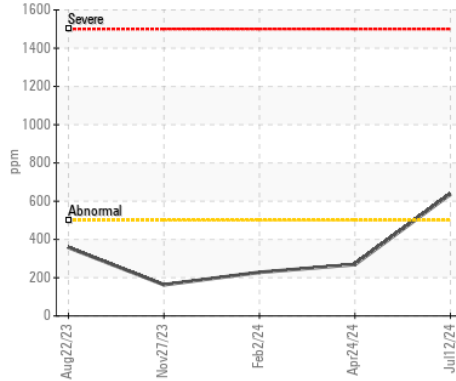


Aluminum (ppm)

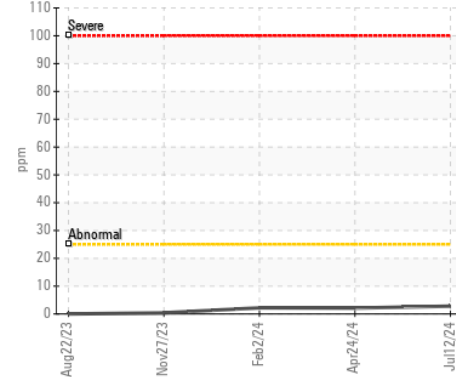


Copper (ppm)

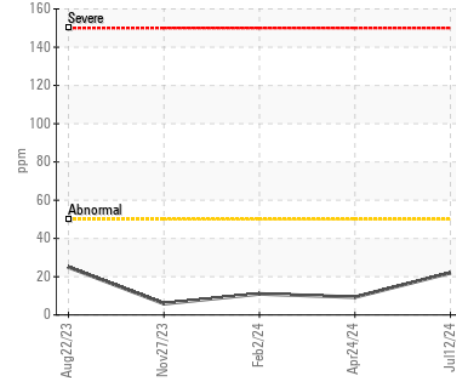


Viscosity @ 40°C

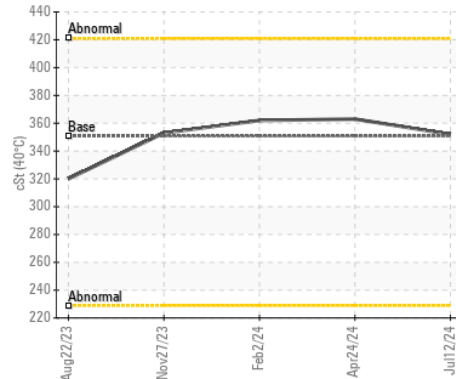


Lead (ppm)

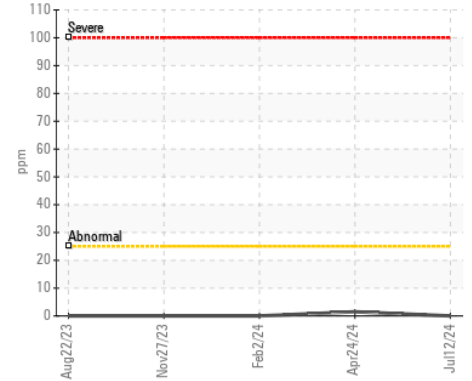


Chromium (ppm)

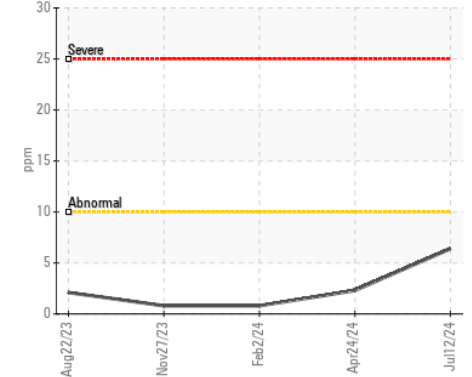

Silicon (ppm)

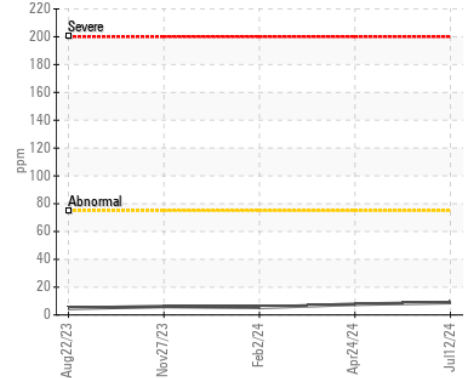

PQ

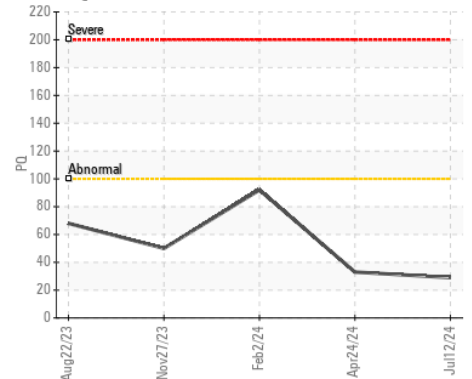

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : JR0224160

Lab Number : 06238141

Unique Number : 11126975

Test Package : MOBCE (Additional Tests: PQ)

Received : 16 Jul 2024

Tested : 17 Jul 2024

Diagnosed : 18 Jul 2024 - Don Baldridge

JRE - HOPE MILLS/FAYETTEVILLE

5039 HWY 301 SOUTH

HOPE MILLS, NC

US 28348

Contact: FAYETTEVILLE SHOP

stephen.mullis@jamesriverequipment.com; panastasio@wearcheck.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:

F: