



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 350G 1FF350GXJFF810816
 Component
Right Final Drive
 Fluid
JOHN DEERE GL-5 80W90 (9 QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0222405	JR0185832	JR0163257
Sample Date		Client Info		11 Jul 2024	19 Sep 2023	21 Mar 2023
Machine Age	hrs	Client Info		8543	8029	7449
Oil Age	hrs	Client Info		514	580	1000
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changd	Changed	Changed
Filter Changed		Client Info		N/A	None	N/A
Sample Status				NORMAL	NORMAL	SEVERE

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>1250	41	11	777
Iron	ppm	ASTM D5185m	>750	212	6	1796
Chromium	ppm	ASTM D5185m	>9	4	0	11
Nickel	ppm	ASTM D5185m	>10	<1	0	2
Titanium	ppm	ASTM D5185m		<1	0	7
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>40	3	<1	120
Lead	ppm	ASTM D5185m	>15	0	0	0
Copper	ppm	ASTM D5185m	>40	3	0	4
Tin	ppm	ASTM D5185m	>10	0	<1	0
Vanadium	ppm	ASTM D5185m		0	<1	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	MODER
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	4	1	502
Potassium	ppm	ASTM D5185m	>20	4	0	29
Water		WC Method	>0.075	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.075	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	27	<1	8
Boron	ppm	ASTM D5185m		<1	0	30
Barium	ppm	ASTM D5185m		400	0	<1
Molybdenum	ppm	ASTM D5185m		0	0	1
Manganese	ppm	ASTM D5185m		4	0	13
Magnesium	ppm	ASTM D5185m		4	0	6
Calcium	ppm	ASTM D5185m		95	0	219
Phosphorus	ppm	ASTM D5185m		986	309	956
Zinc	ppm	ASTM D5185m		28	0	9
Sulfur	ppm	ASTM D5185m		26977	21509	17025
Visc @ 40°C	cSt	ASTM D445		179	141	178

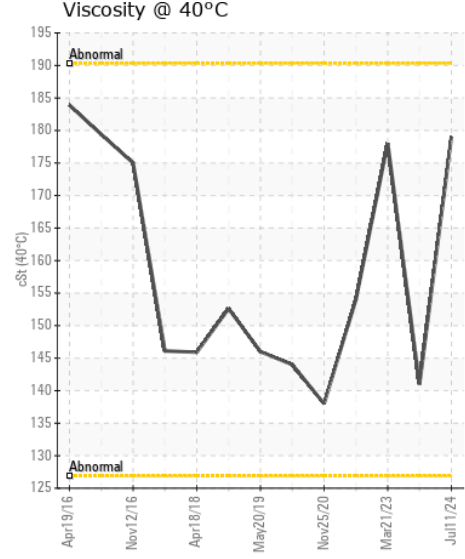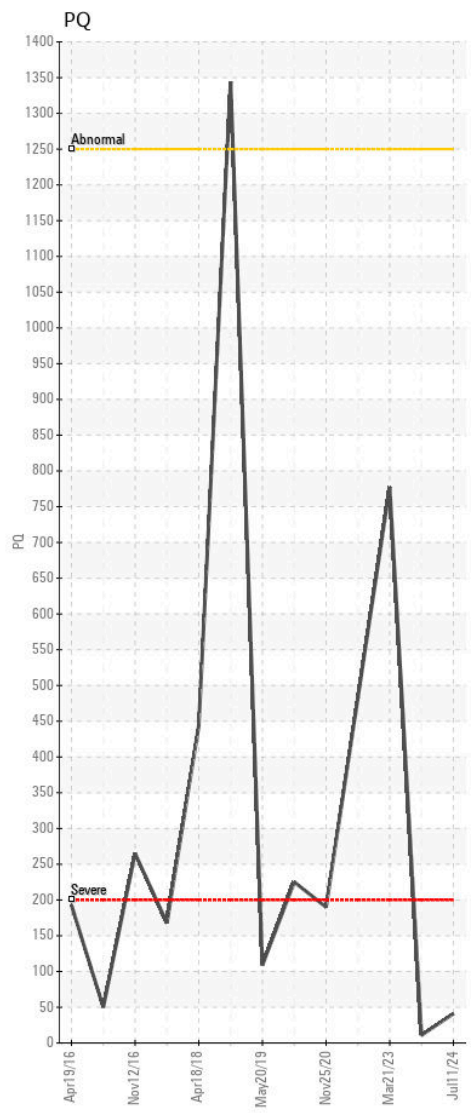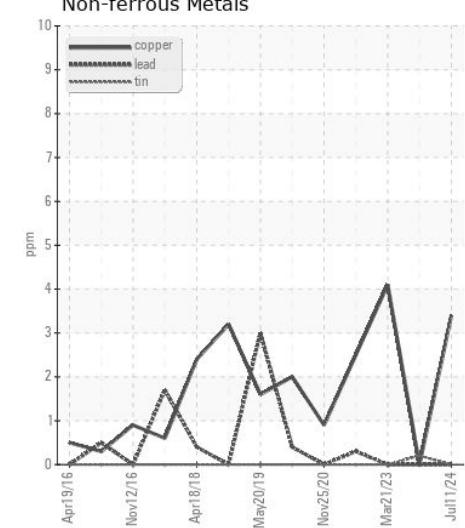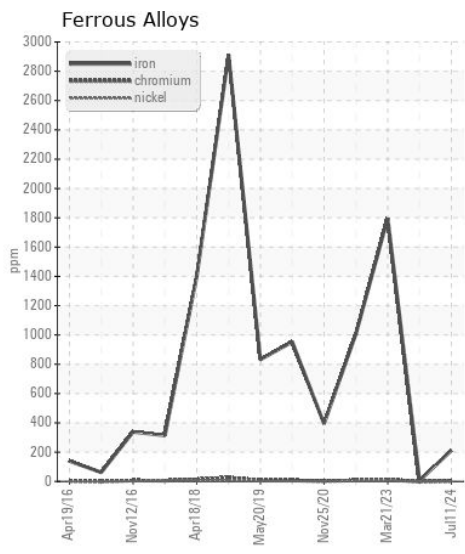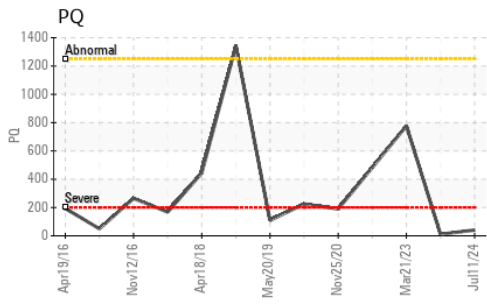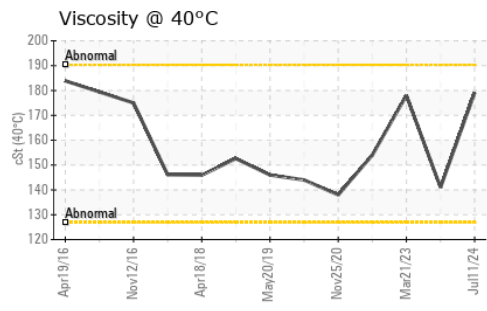

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0222405 **Received** : 16 Jul 2024
Lab Number : 06238154 **Tested** : 17 Jul 2024
Unique Number : 11126988 **Diagnosed** : 18 Jul 2024 - Don Baldrige
Test Package : CONST (Additional Tests: PQ)

JRE - GARNER
 4161 AUBURN CHURCH RD
 GARNER, NC
 US 27529
 Contact: RALEIGH SHOP

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)