



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
VOLVO A40G 752009
Component
Rear Axle
Fluid
MOBIL MOBILUBE HD 80W90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP454437	VCP401118	VCP445737
Sample Date		Client Info		10 Jun 2024	12 Mar 2024	29 Nov 2023
Machine Age	hrs	Client Info		2081	1479	987
Oil Age	hrs	Client Info		602	1052	987
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changed	Changed	Not Changed
Filter Changed		Client Info		Not Changed	Not Changed	Not Changed
Sample Status				NORMAL	NORMAL	ABNORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>900	40	373	328
Chromium	ppm	ASTM D5185m	>20	<1	6	5
Nickel	ppm	ASTM D5185m	>10	0	2	<1
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m		3	0	0
Aluminum	ppm	ASTM D5185m	>30	2	2	0
Lead	ppm	ASTM D5185m	>50	0	<1	0
Copper	ppm	ASTM D5185m	>150	<1	3	2
Tin	ppm	ASTM D5185m	>20	0	<1	0
Vanadium	ppm	ASTM D5185m		0	<1	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	3	6	6
Potassium	ppm	ASTM D5185m	>20	1	6	0
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	LIGHT	HEAVY
Debris	scalar	*Visual	NONE	LIGHT	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		0	2	<1
Boron	ppm	ASTM D5185m		156	388	350
Barium	ppm	ASTM D5185m		0	2	0
Molybdenum	ppm	ASTM D5185m		3	16	12
Manganese	ppm	ASTM D5185m		1	16	12
Magnesium	ppm	ASTM D5185m		15	2	0
Calcium	ppm	ASTM D5185m		558	249	172
Phosphorus	ppm	ASTM D5185m		957	1709	1387
Zinc	ppm	ASTM D5185m		216	111	57
Sulfur	ppm	ASTM D5185m		21794	33564	23264
Visc @ 40°C	cSt	ASTM D445	136	121	104	103

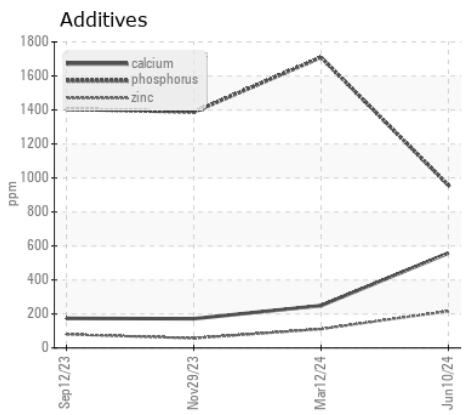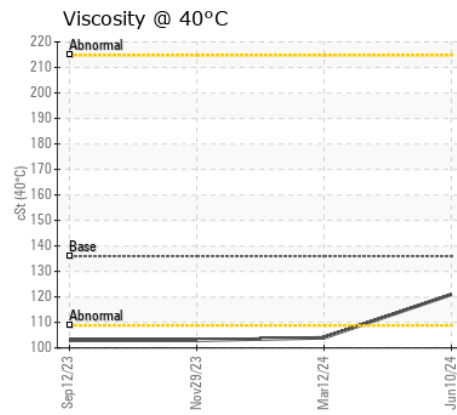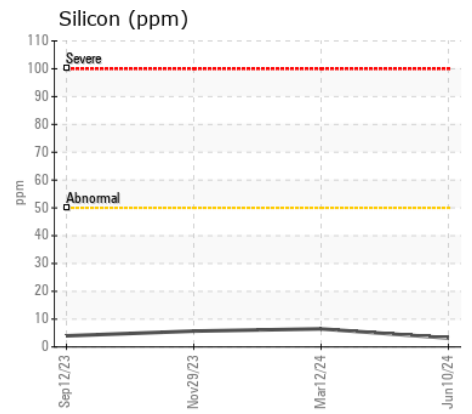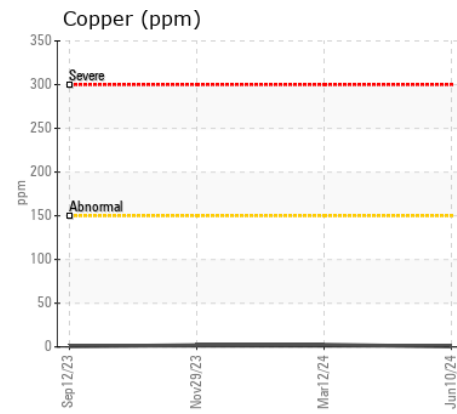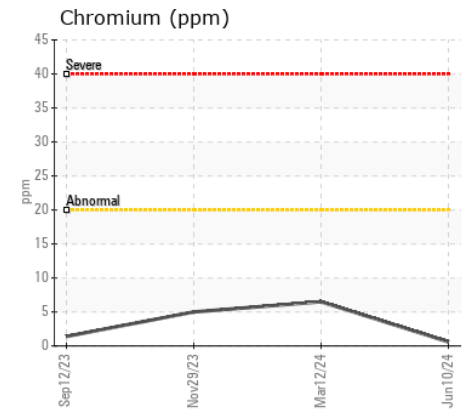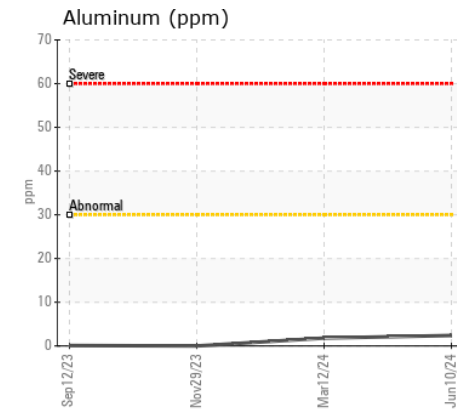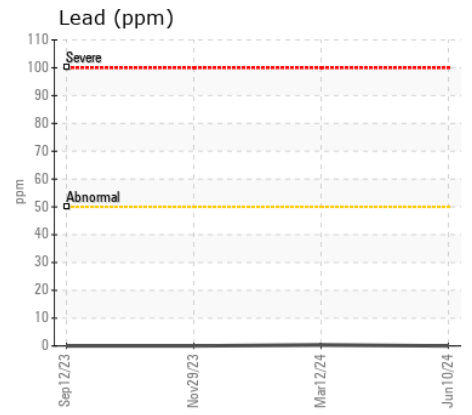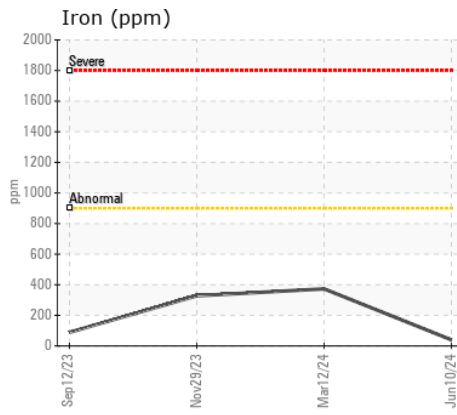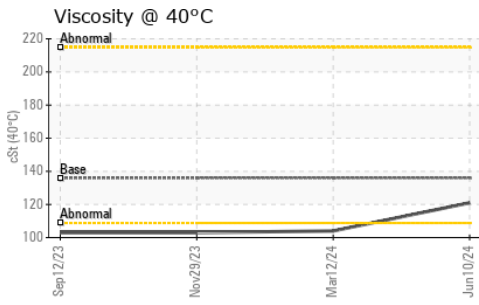

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP454437
Lab Number : 06238164
Unique Number : 11126998
Test Package : MOB 1

Received : 16 Jul 2024
Tested : 17 Jul 2024
Diagnosed : 17 Jul 2024 - Wes Davis

SCHILDBERG CONSTRUCTION COMPANY
 PO BOX 358
 GREENFIELD, IA
 US 50849
 Contact: SCOTT ARMSTRONG
 sarmstrong@schildberg.com
 T: (641)743-8237
 F: (641)743-2486

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)