



# VOLVO

## OIL ANALYSIS REPORT

|                 |               |
|-----------------|---------------|
| WEAR            | <b>NORMAL</b> |
| CONTAMINATION   | <b>NORMAL</b> |
| FLUID CONDITION | <b>NORMAL</b> |



Machine Id  
**VOLVO A40G 342373**  
Component  
**Drop Box**  
Fluid  
**MOBIL MOBILUBE HD 80W90 (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

| Test           | UOM | Method      | Limit/Abn | Current            | History1    | History2    |
|----------------|-----|-------------|-----------|--------------------|-------------|-------------|
| Sample Number  |     | Client Info |           | <b>VCP442501</b>   | VCP440660   | VCP400064   |
| Sample Date    |     | Client Info |           | <b>10 Jun 2024</b> | 29 Nov 2023 | 19 Jul 2023 |
| Machine Age    | hrs | Client Info |           | <b>13342</b>       | 12310       | 11379       |
| Oil Age        | hrs | Client Info |           | <b>1032</b>        | 931         | 1034        |
| Filter Age     | hrs | Client Info |           | <b>0</b>           | 0           | 0           |
| Oil Changed    |     | Client Info |           | <b>Changed</b>     | Changed     | Changed     |
| Filter Changed |     | Client Info |           | <b>Not Changed</b> | Not Changed | Not Changed |
| Sample Status  |     |             |           | <b>NORMAL</b>      | NORMAL      | NORMAL      |

### WEAR

All component wear rates are normal.

|              |        |             |      |              |      |      |
|--------------|--------|-------------|------|--------------|------|------|
| Iron         | ppm    | ASTM D5185m | >500 | <b>10</b>    | 26   | 19   |
| Chromium     | ppm    | ASTM D5185m | >20  | <b>&lt;1</b> | <1   | <1   |
| Nickel       | ppm    | ASTM D5185m | >10  | <b>0</b>     | 0    | 0    |
| Titanium     | ppm    | ASTM D5185m |      | <b>&lt;1</b> | <1   | <1   |
| Silver       | ppm    | ASTM D5185m |      | <b>0</b>     | 0    | 0    |
| Aluminum     | ppm    | ASTM D5185m | >30  | <b>2</b>     | 0    | 0    |
| Lead         | ppm    | ASTM D5185m | >30  | <b>0</b>     | 0    | 0    |
| Copper       | ppm    | ASTM D5185m | >30  | <b>&lt;1</b> | 4    | <1   |
| Tin          | ppm    | ASTM D5185m | >20  | <b>0</b>     | 0    | 0    |
| Vanadium     | ppm    | ASTM D5185m |      | <b>0</b>     | 0    | <1   |
| White Metal  | scalar | *Visual     | NONE | <b>NONE</b>  | NONE | NONE |
| Yellow Metal | scalar | *Visual     | NONE | <b>NONE</b>  | NONE | NONE |

### CONTAMINATION










There is no indication of any contamination in the oil.

|                  |        |             |       |              |       |       |
|------------------|--------|-------------|-------|--------------|-------|-------|
| Silicon          | ppm    | ASTM D5185m | >50   | <b>2</b>     | 3     | 2     |
| Potassium        | ppm    | ASTM D5185m | >20   | <b>1</b>     | 0     | <1    |
| Water            |        | WC Method   | >0.2  | <b>NEG</b>   | NEG   | NEG   |
| Silt             | scalar | *Visual     | NONE  | <b>NONE</b>  | NONE  | NONE  |
| Debris           | scalar | *Visual     | NONE  | <b>NONE</b>  | NONE  | NONE  |
| Sand/Dirt        | scalar | *Visual     | NONE  | <b>NONE</b>  | NONE  | NONE  |
| Appearance       | scalar | *Visual     | NORML | <b>NORML</b> | NORML | NORML |
| Odor             | scalar | *Visual     | NORML | <b>NORML</b> | NORML | NORML |
| Emulsified Water | scalar | *Visual     | >0.2  | <b>NEG</b>   | NEG   | NEG   |

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

|             |     |             |     |              |       |       |
|-------------|-----|-------------|-----|--------------|-------|-------|
| Sodium      | ppm | ASTM D5185m |     | <b>0</b>     | <1    | <1    |
| Boron       | ppm | ASTM D5185m |     | <b>159</b>   | 184   | 162   |
| Barium      | ppm | ASTM D5185m |     | <b>0</b>     | 0     | 0     |
| Molybdenum  | ppm | ASTM D5185m |     | <b>2</b>     | 2     | 1     |
| Manganese   | ppm | ASTM D5185m |     | <b>0</b>     | <1    | <1    |
| Magnesium   | ppm | ASTM D5185m |     | <b>16</b>    | 0     | 7     |
| Calcium     | ppm | ASTM D5185m |     | <b>462</b>   | 342   | 374   |
| Phosphorus  | ppm | ASTM D5185m |     | <b>944</b>   | 980   | 938   |
| Zinc        | ppm | ASTM D5185m |     | <b>181</b>   | 110   | 139   |
| Sulfur      | ppm | ASTM D5185m |     | <b>21973</b> | 21977 | 25056 |
| Visc @ 40°C | cSt | ASTM D445   | 136 | <b>124</b>   | 134   | 133   |

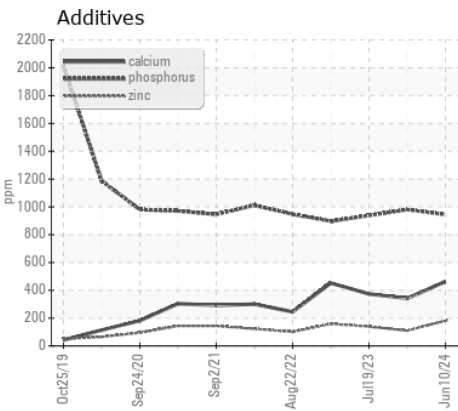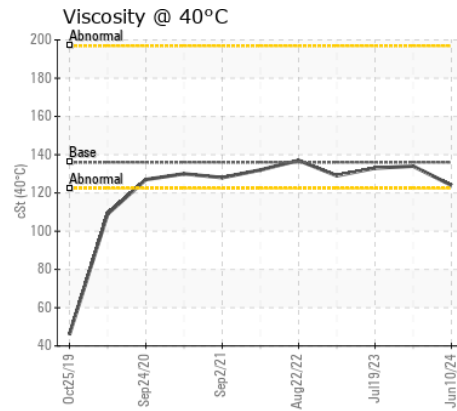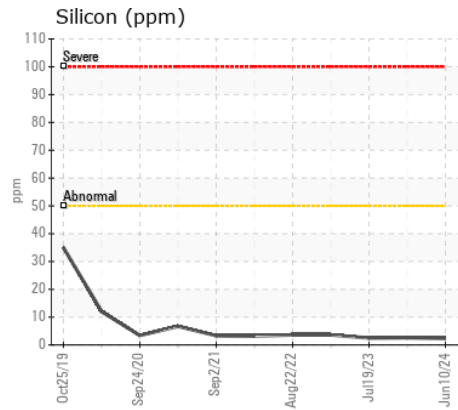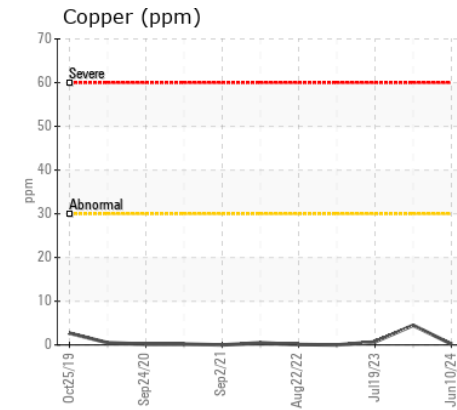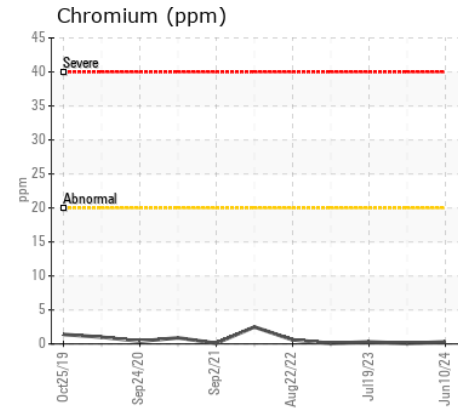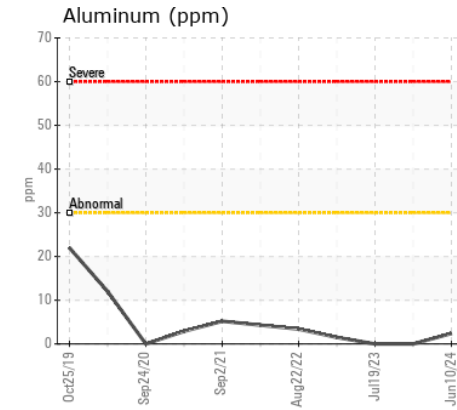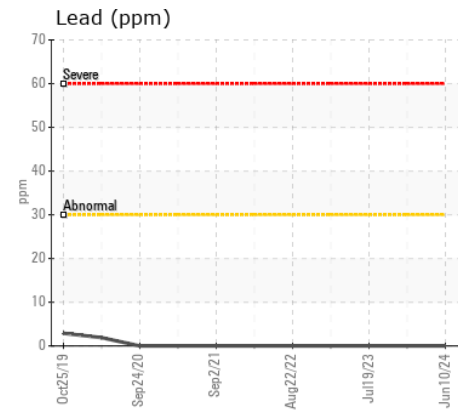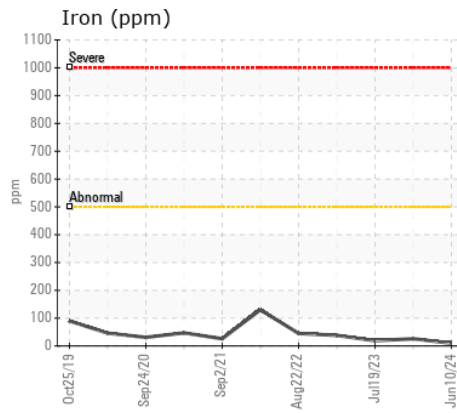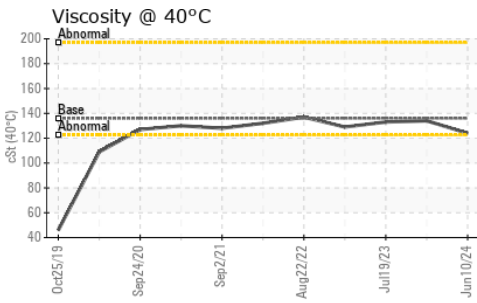

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : VCP442501  
**Lab Number** : 06238171  
**Unique Number** : 11127005  
**Test Package** : MOB 1

**Received** : 16 Jul 2024  
**Tested** : 17 Jul 2024  
**Diagnosed** : 17 Jul 2024 - Wes Davis

**SCHILBERG CONSTRUCTION COMPANY**  
 PO BOX 358  
 GREENFIELD, IA  
 US 50849  
 Contact: SCOTT ARMSTRONG  
 sarmstrong@schildberg.com  
 T: (641)743-8237  
 F: (641)743-2486

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)