



# VOLVO

## OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	NORMAL



Area  
**[578354 T AND K]**  
 Machine Id  
**VOLVO A45G 752152**  
 Component  
**Drop Box**  
 Fluid  
**VOLVO PREMIUM GEAR OIL 80W-90 GL-5 (--- GAL)**

### RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP443565	---	---
Sample Date		Client Info		07 Jun 2024	---	---
Machine Age	hrs	Client Info		967	---	---
Oil Age	hrs	Client Info		967	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Not Changed	---	---
Filter Changed		Client Info		Not Changed	---	---
Sample Status				ABNORMAL	---	---

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	84	---	---
Chromium	ppm	ASTM D5185m	>20	1	---	---
Nickel	ppm	ASTM D5185m	>10	<1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>30	2	---	---
Lead	ppm	ASTM D5185m	>30	0	---	---
Copper	ppm	ASTM D5185m	>30	10	---	---
Tin	ppm	ASTM D5185m	>20	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

### CONTAMINATION










Moderate concentration of visible dirt/debris present in the oil.

Silicon	ppm	ASTM D5185m	>50	22	---	---
Potassium	ppm	ASTM D5185m	>20	4	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	▲ MODER	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		4	---	---
Boron	ppm	ASTM D5185m	379	120	---	---
Barium	ppm	ASTM D5185m	0.0	0	---	---
Molybdenum	ppm	ASTM D5185m	0.8	6	---	---
Manganese	ppm	ASTM D5185m	0.0	2	---	---
Magnesium	ppm	ASTM D5185m	31	2	---	---
Calcium	ppm	ASTM D5185m	38	18	---	---
Phosphorus	ppm	ASTM D5185m	1077	2137	---	---
Zinc	ppm	ASTM D5185m	46	63	---	---
Sulfur	ppm	ASTM D5185m	23526	25130	---	---
Visc @ 40°C	cSt	ASTM D445	139	50.0	---	---

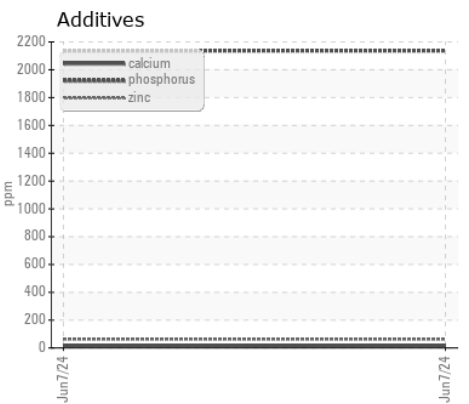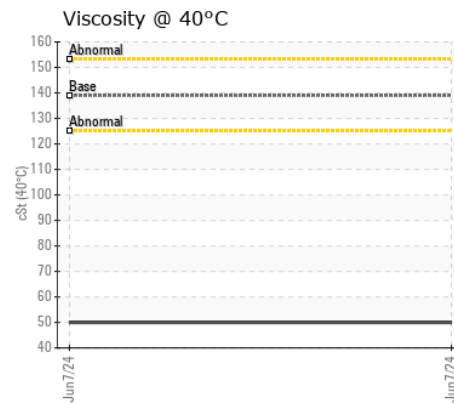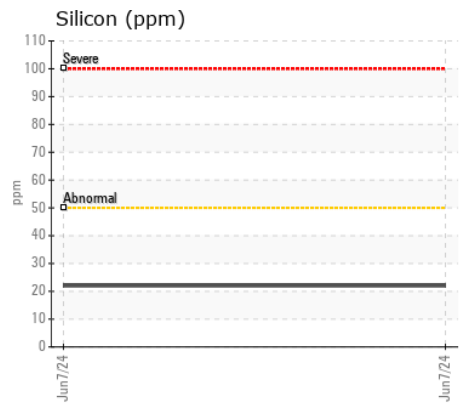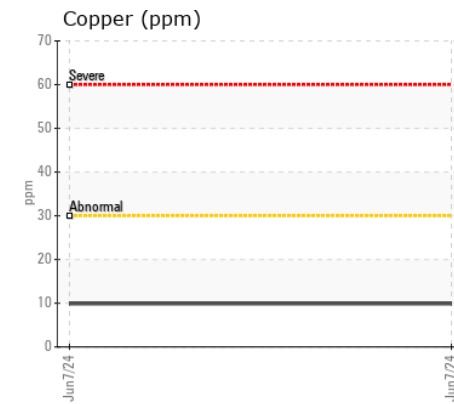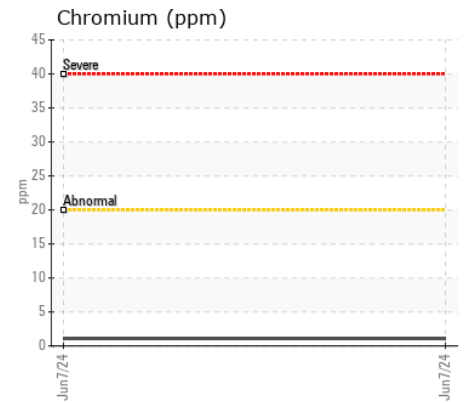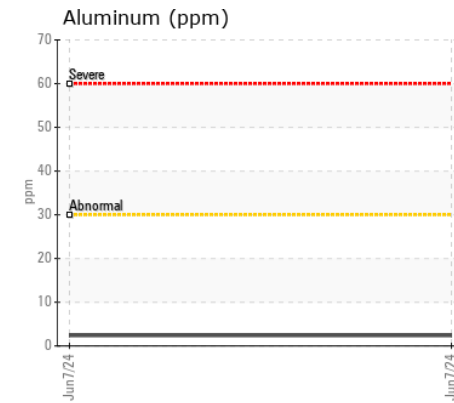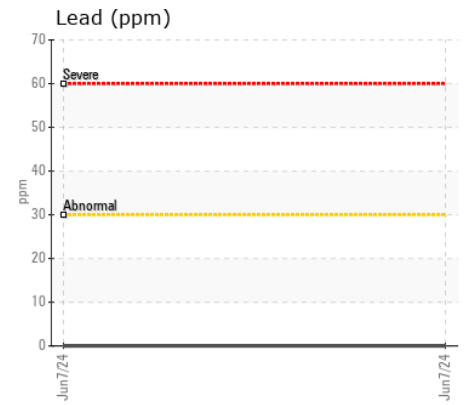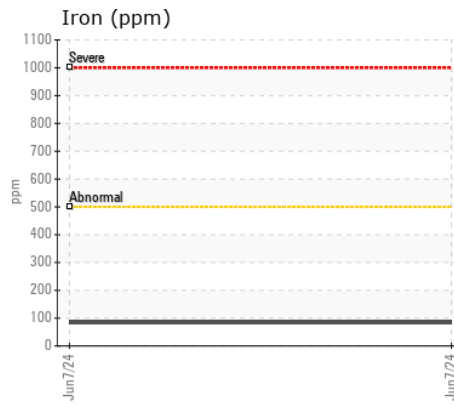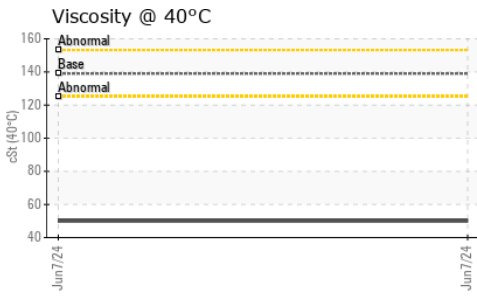

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : VCP443565  
**Lab Number** : 06238187  
**Unique Number** : 11127021  
**Test Package** : MOB 1

**Received** : 16 Jul 2024  
**Tested** : 17 Jul 2024  
**Diagnosed** : 18 Jul 2024 - Sean Felton

**ALTA EQUIPMENT/FLAGLER CONSTRUCTION EQUIPMENT LLC**  
 8418 PALM RIVER ROAD  
 TAMPA, FL  
 US 33619  
 Contact: JOHN FARDELLA  
 john.fardella@altg.com  
 T: (813)630-0077  
 F: (813)630-2233

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)