



# VOLVO

## OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Area  
**[729177 MOSAIC]**  
 Machine Id  
**VOLVO EC380 315267**  
 Component  
**Swing Drive**  
 Fluid  
**VOLVO PREMIUM GEAR OIL 85W-140 GL-5 (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>VCP439777</b>	VCP393549	---
Sample Date		Client Info		<b>13 Jun 2024</b>	10 May 2023	---
Machine Age	hrs	Client Info		<b>1033</b>	496	---
Oil Age	hrs	Client Info		<b>1033</b>	0	---
Filter Age	hrs	Client Info		<b>0</b>	0	---
Oil Changed		Client Info		<b>Changed</b>	Not Changd	---
Filter Changed		Client Info		<b>Not Changed</b>	Not Changed	---
Sample Status				<b>NORMAL</b>	NORMAL	---

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>1200	<b>509</b>	283	---
Chromium	ppm	ASTM D5185m	>10	<b>6</b>	4	---
Nickel	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Silver	ppm	ASTM D5185m		<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>25	<b>2</b>	<1	---
Lead	ppm	ASTM D5185m	>50	<b>0</b>	<1	---
Copper	ppm	ASTM D5185m	>50	<b>15</b>	9	---
Tin	ppm	ASTM D5185m	>10	<b>0</b>	0	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	---
White Metal	scalar	*Visual	NONE	<b>MODER</b>	MODER	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

### CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>100	<b>11</b>	8	---
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	1	---
Water		WC Method	>0.25	<b>NEG</b>	NEG	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.25	<b>NEG</b>	0.2%	---

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
Boron	ppm	ASTM D5185m	111	<b>4</b>	0	---
Barium	ppm	ASTM D5185m	0.0	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m	0.9	<b>&lt;1</b>	<1	---
Manganese	ppm	ASTM D5185m	0.0	<b>7</b>	4	---
Magnesium	ppm	ASTM D5185m	39	<b>2</b>	<1	---
Calcium	ppm	ASTM D5185m	93	<b>0</b>	21	---
Phosphorus	ppm	ASTM D5185m	920	<b>276</b>	240	---
Zinc	ppm	ASTM D5185m	104	<b>33</b>	32	---
Sulfur	ppm	ASTM D5185m	20179	<b>13738</b>	13805	---
Visc @ 40°C	cSt	ASTM D445	333	<b>164</b>	162	---

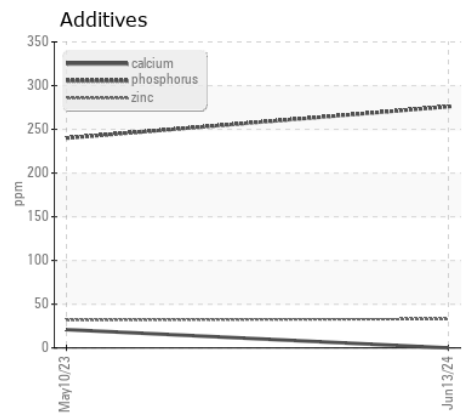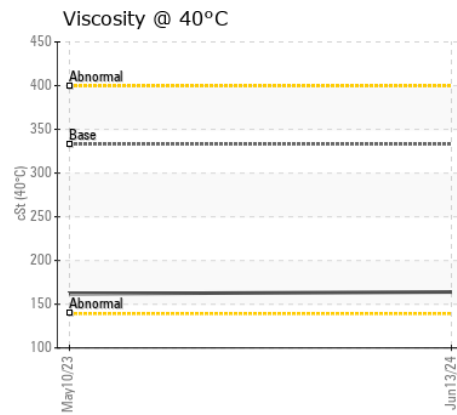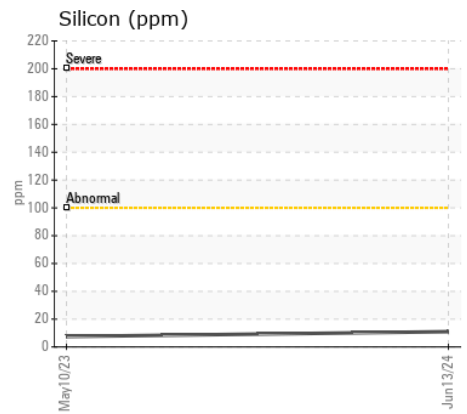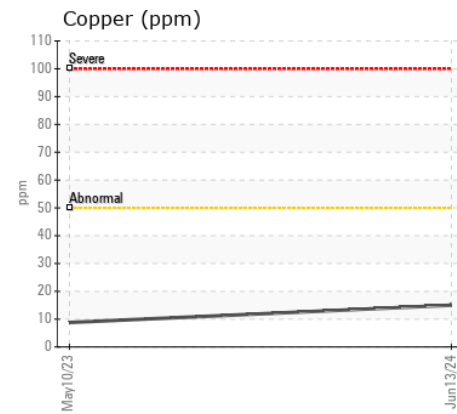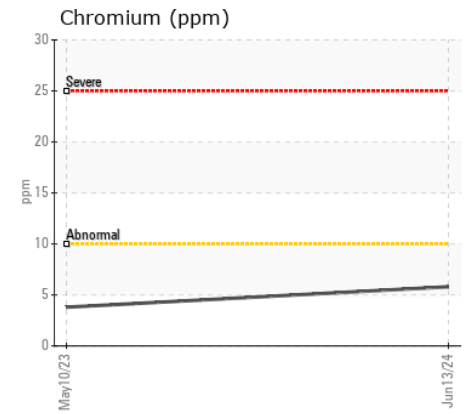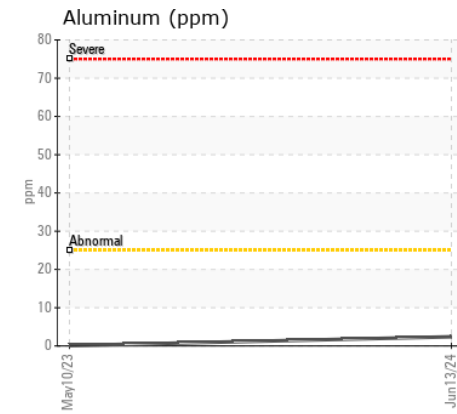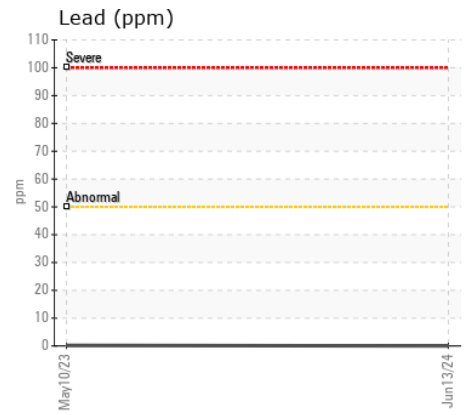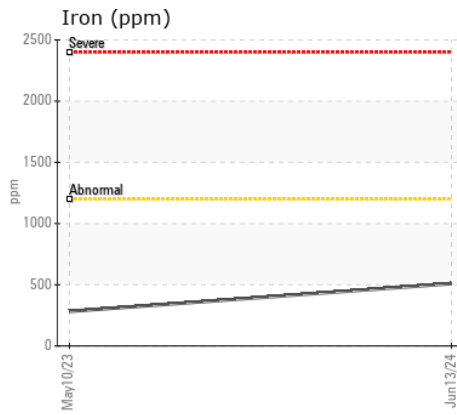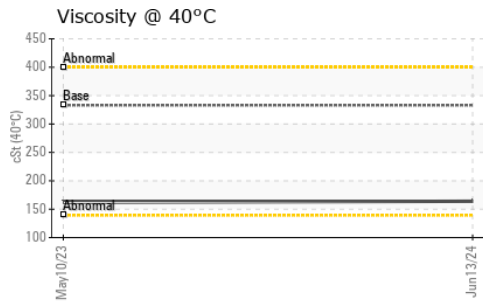

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : VCP439777  
**Lab Number** : 06238192  
**Unique Number** : 11127026  
**Test Package** : MOB 1

**Received** : 16 Jul 2024  
**Tested** : 17 Jul 2024  
**Diagnosed** : 18 Jul 2024 - Sean Felton

ALTA EQUIPMENT/FLAGLER CONSTRUCTION EQUIPMENT LLC  
 8418 PALM RIVER ROAD  
 TAMPA, FL  
 US 33619  
 Contact: KENNY HANEY  
 khaney@flaglerce.com  
 T: (813)630-0077  
 F: (813)630-2233

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)