



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

[717066 MOSAIC]

Machine Id

VOLVO EC480EL 315302

Component

Rear Left Final Drive

Fluid

VOLVO PREMIUM GEAR OIL 80W-90 GL-5 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP439765	VCP440779	---
Sample Date		Client Info		29 May 2024	29 Nov 2023	---
Machine Age	hrs	Client Info		1028	516	---
Oil Age	hrs	Client Info		1028	516	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		Not Changed	Not Changed	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>3300	524	43	---
Chromium	ppm	ASTM D5185m	>35	4	0	---
Nickel	ppm	ASTM D5185m	>5	<1	0	---
Titanium	ppm	ASTM D5185m	>15	<1	0	---
Silver	ppm	ASTM D5185m	>2	0	0	---
Aluminum	ppm	ASTM D5185m	>175	2	<1	---
Lead	ppm	ASTM D5185m	>4	0	0	---
Copper	ppm	ASTM D5185m	>60	4	2	---
Tin	ppm	ASTM D5185m	>5	0	0	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	MODER	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>1070	34	10	---
Potassium	ppm	ASTM D5185m	>20	2	<1	---
Water		WC Method	>0.25	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.25	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		0	<1	---
Boron	ppm	ASTM D5185m	379	127	71	---
Barium	ppm	ASTM D5185m	0.0	0	0	---
Molybdenum	ppm	ASTM D5185m	0.8	5	5	---
Manganese	ppm	ASTM D5185m	0.0	4	1	---
Magnesium	ppm	ASTM D5185m	31	48	51	---
Calcium	ppm	ASTM D5185m	38	197	252	---
Phosphorus	ppm	ASTM D5185m	1077	954	992	---
Zinc	ppm	ASTM D5185m	46	170	207	---
Sulfur	ppm	ASTM D5185m	23526	24364	25488	---
Visc @ 40°C	cSt	ASTM D445	139	257	251	---

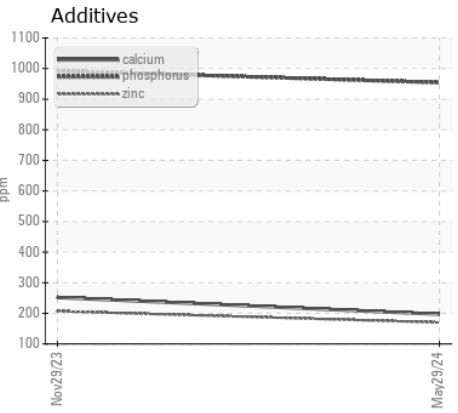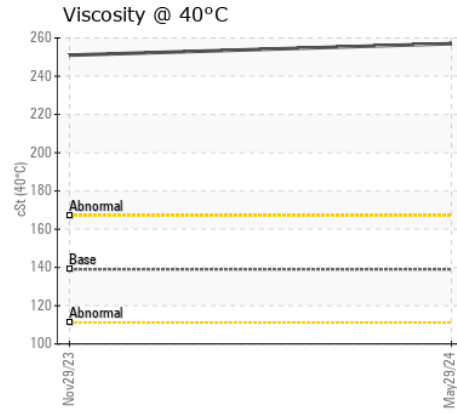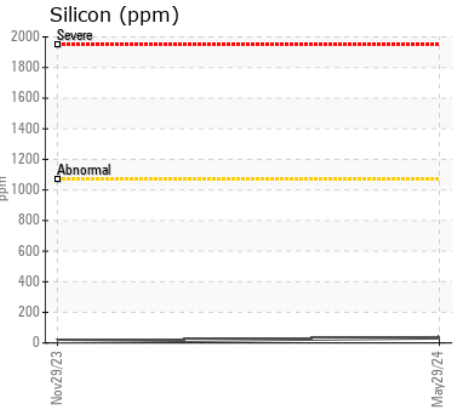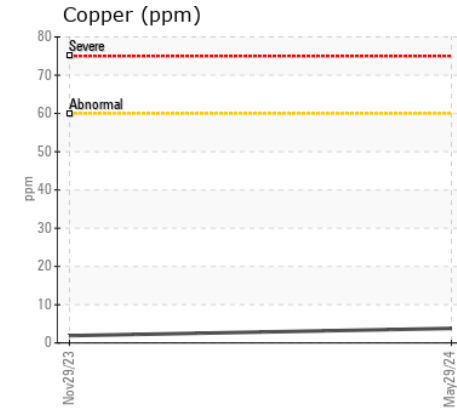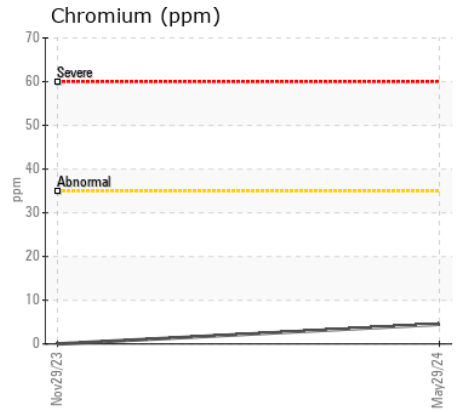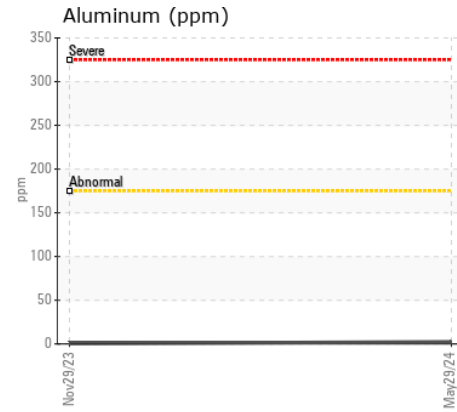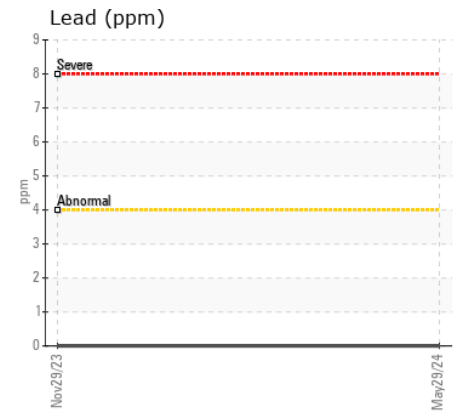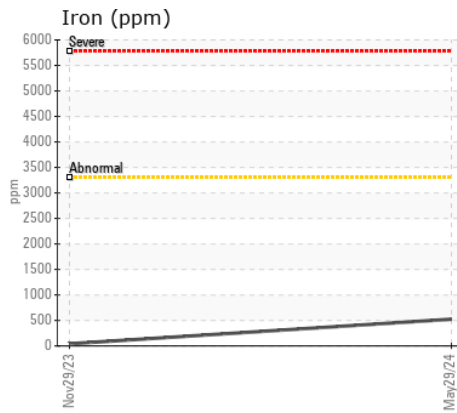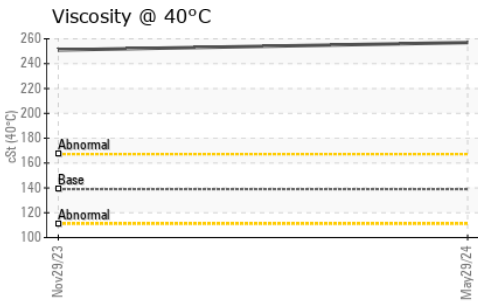

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP439765
Lab Number : 06238209
Unique Number : 11127043
Test Package : MOB 1

Received : 16 Jul 2024
Tested : 17 Jul 2024
Diagnosed : 17 Jul 2024 - Wes Davis

ALTA EQUIPMENT/FLAGLER CONSTRUCTION EQUIPMENT LLC
 8418 PALM RIVER ROAD
 TAMPA, FL
 US 33619
 Contact: KENNY HANEY
 khaney@flaglerce.com
 T: (813)630-0077
 F: (813)630-2233

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)