



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**VOLVO L70H 623612**

Component  
**Rear Axle**

Fluid  
**VOLVO SUPER WET BRAKE TRANSAXLE OIL WB102 (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>ML0002637</b>	ML0002821	ML0000574
Sample Date		Client Info		<b>11 Jul 2024</b>	30 May 2024	18 Jan 2024
Machine Age	hrs	Client Info		<b>4544</b>	4094	3053
Oil Age	hrs	Client Info		<b>450</b>	1000	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Not Changed</b>	Changed	N/A
Filter Changed		Client Info		<b>Not Changed</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	<b>10</b>	14	7
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	0
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>30	<b>2</b>	1	1
Lead	ppm	ASTM D5185m	>50	<b>0</b>	<1	0
Copper	ppm	ASTM D5185m	>120	<b>&lt;1</b>	1	0
Tin	ppm	ASTM D5185m	>20	<b>0</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	<b>14</b>	11	14
Potassium	ppm	ASTM D5185m	>20	<b>9</b>	2	0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>0</b>	0	<1
Boron	ppm	ASTM D5185m		<b>144</b>	149	123
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m		<b>16</b>	14	21
Calcium	ppm	ASTM D5185m		<b>3942</b>	3868	3874
Phosphorus	ppm	ASTM D5185m		<b>1286</b>	1396	1339
Zinc	ppm	ASTM D5185m		<b>1623</b>	1664	1674
Sulfur	ppm	ASTM D5185m		<b>3925</b>	5871	3837
Visc @ 40°C	cSt	ASTM D445	55	<b>44.3</b>	42.7	43.9

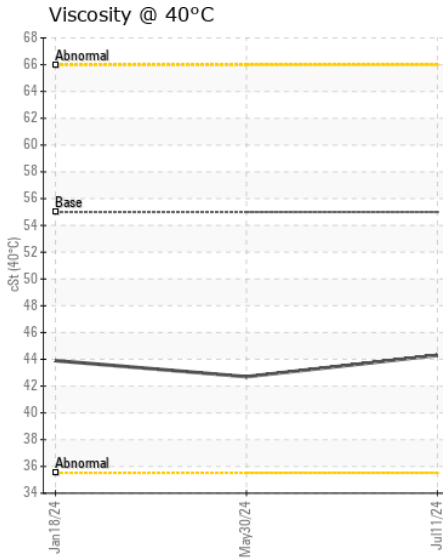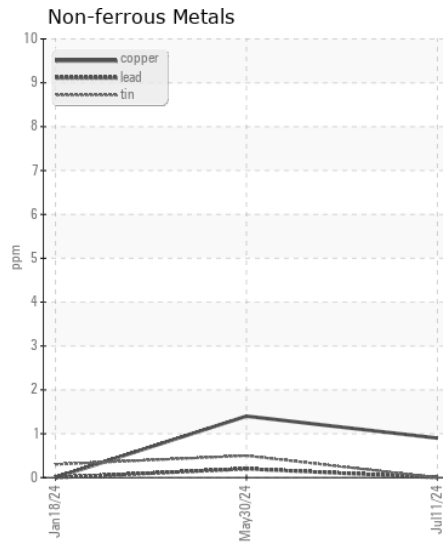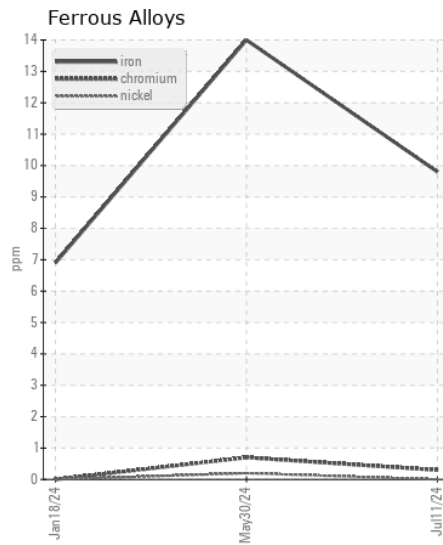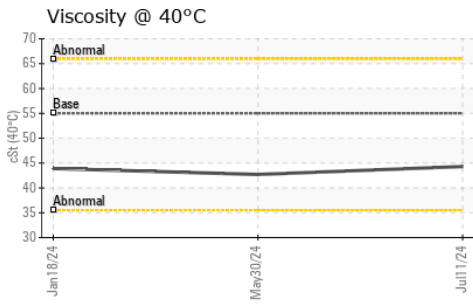

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : ML0002637  
**Lab Number** : 06238222  
**Unique Number** : 11127056  
**Test Package** : CONST

**Received** : 16 Jul 2024  
**Tested** : 17 Jul 2024  
**Diagnosed** : 18 Jul 2024 - Sean Felton

**MCCLUNG-LOGAN EQUIPMENT CO - RICHMOND**  
 1345 MOUNTAIN ROAD  
 GLEN ALLEN, VA  
 US 23060  
 Contact: KYLE RATLIFFE  
 KRATLIFFE@MCCLUNG-LOGAN.COM  
 T:  
 F: (804)266-1611

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)