



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id  
**VOLVO 314709**  
 Component  
**Left Travel**  
 Fluid  
**GEAR OIL SAE 80W140 (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) GEAR OIL SAE 80W140. Please confirm.

### WEAR

All component wear rates are normal.





### CONTAMINATION

There is no indication of any contamination in the oil.

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ASC0003339	---	---
Sample Date		Client Info		15 Jul 2024	---	---
Machine Age	hrs	Client Info		993	---	---
Oil Age	hrs	Client Info		993	---	---
Filter Age	hrs	Client Info		993	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---
Iron	ppm	ASTM D5185m	>500	491	---	---
Chromium	ppm	ASTM D5185m	>20	9	---	---
Nickel	ppm	ASTM D5185m	>5	2	---	---
Titanium	ppm	ASTM D5185m		2	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>100	19	---	---
Lead	ppm	ASTM D5185m	>10	0	---	---
Copper	ppm	ASTM D5185m	>60	<1	---	---
Tin	ppm	ASTM D5185m	>5	0	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Silicon	ppm	ASTM D5185m	>150	51	---	---
Potassium	ppm	ASTM D5185m	>20	8	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---
Sodium	ppm	ASTM D5185m		2	---	---
Boron	ppm	ASTM D5185m	400	84	---	---
Barium	ppm	ASTM D5185m	200	0	---	---
Molybdenum	ppm	ASTM D5185m	12	1	---	---
Manganese	ppm	ASTM D5185m		9	---	---
Magnesium	ppm	ASTM D5185m	12	5	---	---
Calcium	ppm	ASTM D5185m	150	76	---	---
Phosphorus	ppm	ASTM D5185m	1650	763	---	---
Zinc	ppm	ASTM D5185m	125	39	---	---
Sulfur	ppm	ASTM D5185m	22500	24924	---	---
Visc @ 40°C	cSt	ASTM D445	263	271	---	---

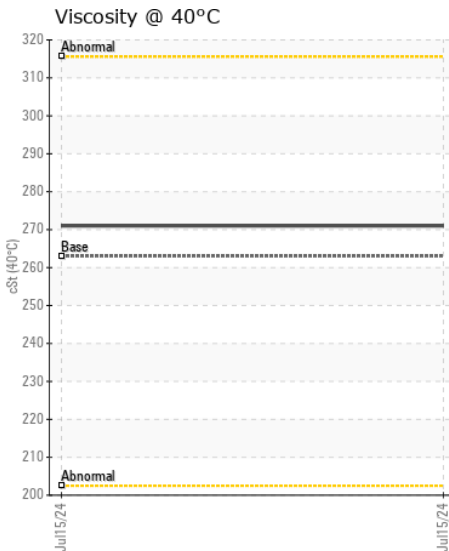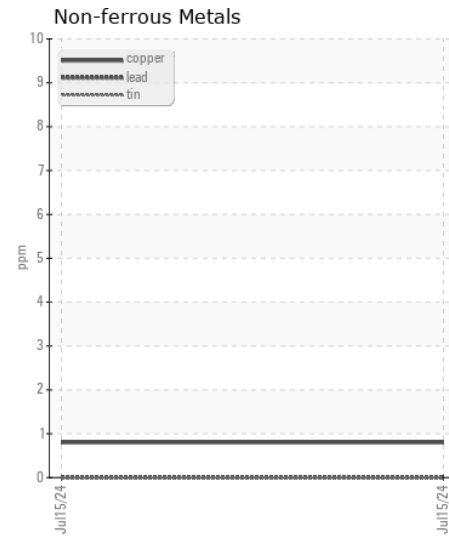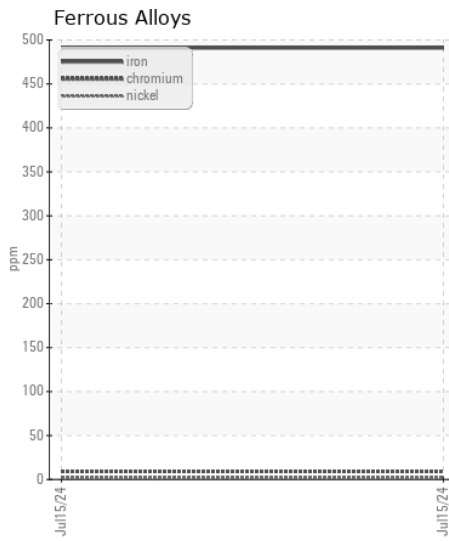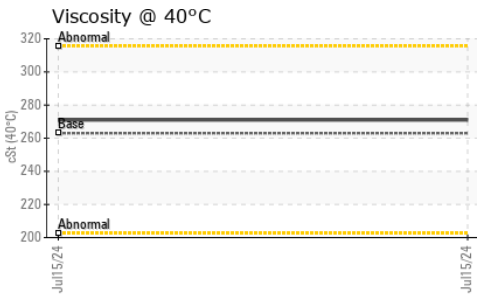

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : ASC0003339  
**Lab Number** : 06238236  
**Unique Number** : 11127070  
**Test Package** : CONST

**Received** : 16 Jul 2024  
**Tested** : 17 Jul 2024  
**Diagnosed** : 17 Jul 2024 - Wes Davis

**160 - ASCENDUM MACHINERY INC - MILLS RIVER**  
 215 FANNING FIELDS RD  
 MILLS RIVER, NC  
 US 28759  
 Contact: Kendall Rhodes  
 kendall.rhodes@ascendummachinery.com  
 T:  
 F: (828)687-0622

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)