



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
420097 - SW4006
Component
1 Differential
Fluid
GEAR OIL SAE 80W90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. (Customer Sample Comment: 1st Axle / Pusher)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0128725	GFL0105471	GFL0123520
Sample Date		Client Info		10 Jul 2024	03 Jul 2024	19 Jun 2024
Machine Age	mls	Client Info		231528	233426	231528
Oil Age	mls	Client Info		231528	233426	231528
Filter Age	mls	Client Info		233426	233426	0
Oil Changed		Client Info		Not Changd	Not Changd	Changed
Filter Changed		Client Info		Not Changd	Not Changd	Changed
Sample Status				NORMAL	NORMAL	ABNORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>1200	344	336	738
Chromium	ppm	ASTM D5185m	>8	2	2	5
Nickel	ppm	ASTM D5185m	>20	8	9	▲ 20
Titanium	ppm	ASTM D5185m	>4	<1	<1	<1
Silver	ppm	ASTM D5185m		0	<1	0
Aluminum	ppm	ASTM D5185m	>30	5	5	9
Lead	ppm	ASTM D5185m	>25	0	0	0
Copper	ppm	ASTM D5185m	>50	<1	1	2
Tin	ppm	ASTM D5185m	>5	0	0	0
Vanadium	ppm	ASTM D5185m		0	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>230	50	50	106
Potassium	ppm	ASTM D5185m	>20	1	2	4
Water		WC Method	>.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>170	2	0	3
Boron	ppm	ASTM D5185m	400	38	36	96
Barium	ppm	ASTM D5185m	200	0	<1	0
Molybdenum	ppm	ASTM D5185m	12	0	<1	<1
Manganese	ppm	ASTM D5185m		4	3	6
Magnesium	ppm	ASTM D5185m	12	2	2	6
Calcium	ppm	ASTM D5185m	150	11	3	85
Phosphorus	ppm	ASTM D5185m	1650	607	645	809
Zinc	ppm	ASTM D5185m	125	10	14	56
Sulfur	ppm	ASTM D5185m	22500	19259	15994	14763
Visc @ 40°C	cSt	ASTM D445	143	52.6	53.8	55.7

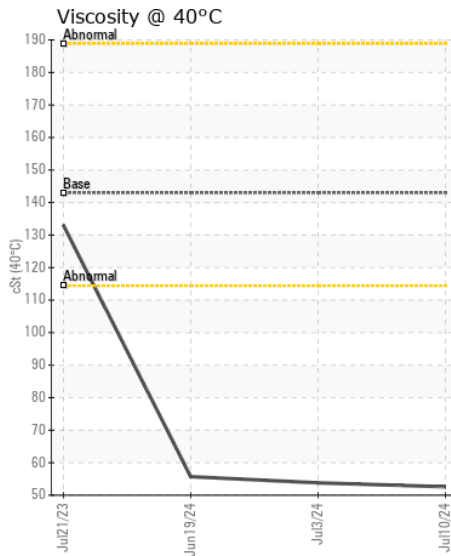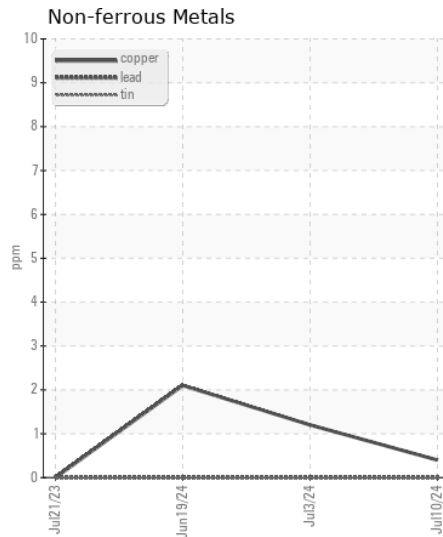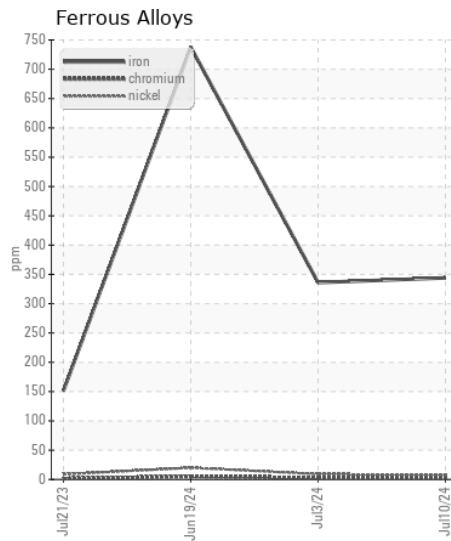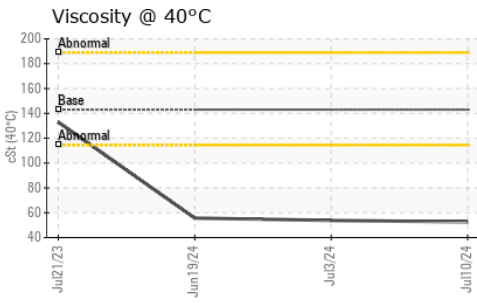

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0128725
Lab Number : 06238246
Unique Number : 11127080
Test Package : FLEET

Received : 16 Jul 2024
Tested : 17 Jul 2024
Diagnosed : 18 Jul 2024 - Sean Felton

GFL Environmental - 983 - Sugar Land Hauling
 16011 West Belfort Street
 Sugar Land, TX
 US 77498
 Contact: Adrian Martinez
 adrianmartinez@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: