



# ASCENDUM

## OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Area  
**(7365) Ascendum Machinery/500 Hour CSA**  
Machine Id  
**VOLVO L150H 2347 (S/N L150HV7265)**  
Component  
**Rear Axle**  
Fluid  
**TRANSAXLE OIL SAE 75W80 (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>ASC0009474</b>	ASC0010075	ASC0008857
Sample Date		Client Info		<b>12 Jul 2024</b>	17 Apr 2024	29 Feb 2024
Machine Age	hrs	Client Info		<b>3522</b>	2485	2032
Oil Age	hrs	Client Info		<b>2522</b>	1485	1000
Filter Age	hrs	Client Info		<b>1522</b>	1485	2023
Oil Changed		Client Info		<b>Not Changed</b>	Not Changed	Not Changed
Filter Changed		Client Info		<b>Not Changed</b>	Not Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	<b>28</b>	7	40
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	1
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m		<b>0</b>	0	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>30	<b>&lt;1</b>	1	<1
Lead	ppm	ASTM D5185m	>50	<b>0</b>	0	3
Copper	ppm	ASTM D5185m	>120	<b>2</b>	0	2
Tin	ppm	ASTM D5185m	>20	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	<b>11</b>	12	10
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	<1
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>2</b>	<1	3
Boron	ppm	ASTM D5185m	160	<b>118</b>	138	121
Barium	ppm	ASTM D5185m	10	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	25	<b>1</b>	0	1
Manganese	ppm	ASTM D5185m		<b>1</b>	0	2
Magnesium	ppm	ASTM D5185m	12	<b>17</b>	19	9
Calcium	ppm	ASTM D5185m	3750	<b>3779</b>	4145	3579
Phosphorus	ppm	ASTM D5185m	1200	<b>1290</b>	1353	1249
Zinc	ppm	ASTM D5185m	1500	<b>1541</b>	1674	1445
Sulfur	ppm	ASTM D5185m	6000	<b>4666</b>	5135	4089
Visc @ 40°C	cSt	ASTM D445	48	<b>42.2</b>	43.3	43.9

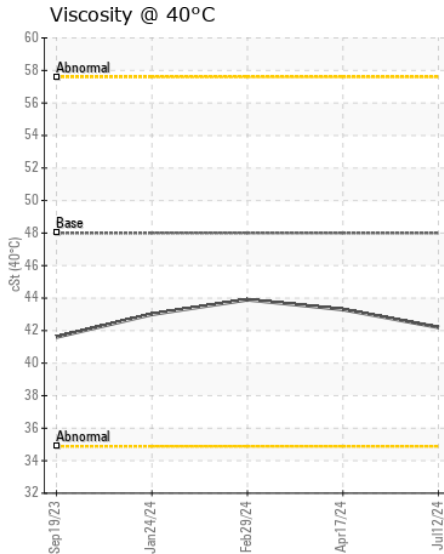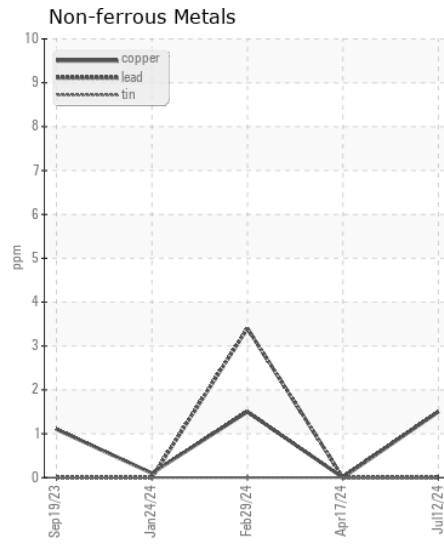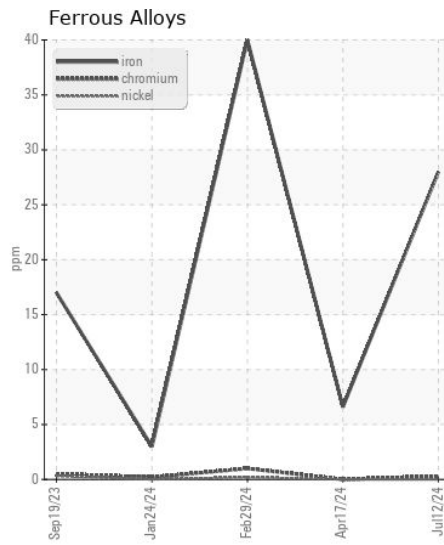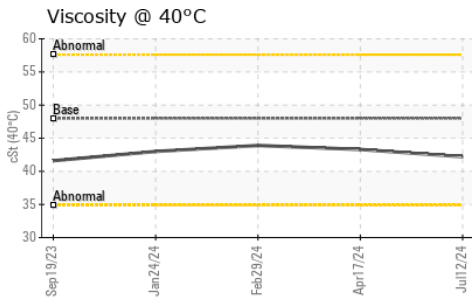

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : ASC0009474  
**Lab Number** : 06238251  
**Unique Number** : 11127085  
**Test Package** : CONST  
**Received** : 16 Jul 2024  
**Tested** : 17 Jul 2024  
**Diagnosed** : 17 Jul 2024 - Wes Davis

**G S MATERIALS INC**  
 PO BOX 1335  
 BURLINGTON, NC  
 US 27216

Contact: KAREN NEWPORT  
 Gsmaterials@windstream.net  
 T: (919)499-9322  
 F: (919)499-2097

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)