



ASCENDUM

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
VOLVO A40G 353408
Component
Rear Axle
Fluid
{not provided} (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

WEAR

All component wear rates are normal.





CONTAMINATION

There is no indication of any contamination in the oil.

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ASC0009010	ASC0008794	---
Sample Date		Client Info		03 Jul 2024	27 Feb 2024	---
Machine Age	hrs	Client Info		2099	1450	---
Oil Age	hrs	Client Info		2099	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		N/A	Not Changd	---
Filter Changed		Client Info		N/A	N/A	---
Sample Status				NORMAL	NORMAL	---
Iron	ppm	ASTM D5185m	>900	44	35	---
Chromium	ppm	ASTM D5185m	>20	<1	<1	---
Nickel	ppm	ASTM D5185m	>10	<1	<1	---
Titanium	ppm	ASTM D5185m		<1	<1	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>30	4	2	---
Lead	ppm	ASTM D5185m	>50	0	0	---
Copper	ppm	ASTM D5185m	>150	2	<1	---
Tin	ppm	ASTM D5185m	>20	0	<1	---
Vanadium	ppm	ASTM D5185m		<1	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---
Silicon	ppm	ASTM D5185m	>50	8	2	---
Potassium	ppm	ASTM D5185m	>20	2	2	---
Water		WC Method	>0.2	NEG	NEG	---
Silt	scalar	*Visual	NONE	MODER	NONE	---
Debris	scalar	*Visual	NONE	NONE	LIGHT	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---
Sodium	ppm	ASTM D5185m		1	<1	---
Boron	ppm	ASTM D5185m		295	286	---
Barium	ppm	ASTM D5185m		0	0	---
Molybdenum	ppm	ASTM D5185m		<1	1	---
Manganese	ppm	ASTM D5185m		<1	1	---
Magnesium	ppm	ASTM D5185m		3	6	---
Calcium	ppm	ASTM D5185m		84	123	---
Phosphorus	ppm	ASTM D5185m		2335	2340	---
Zinc	ppm	ASTM D5185m		49	44	---
Sulfur	ppm	ASTM D5185m		26134	28245	---
Visc @ 40°C	cSt	ASTM D445		53.1	54.1	---

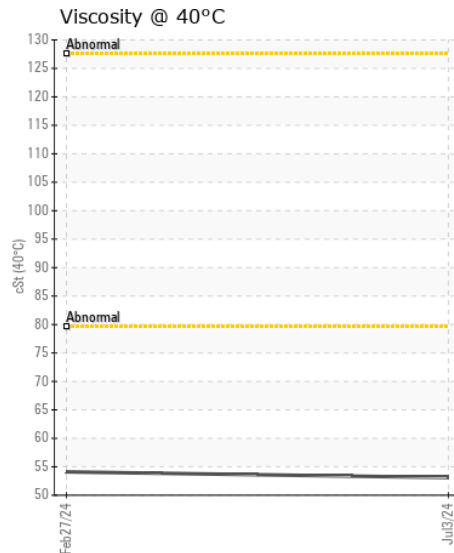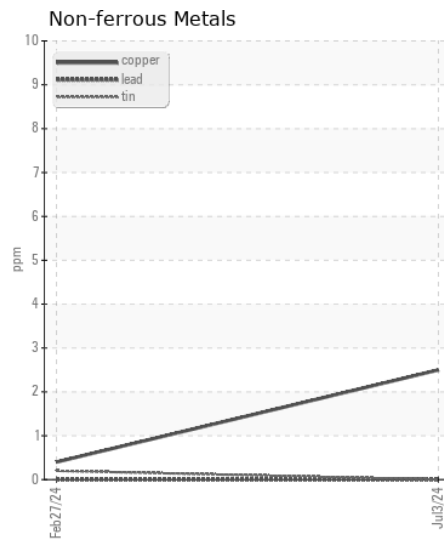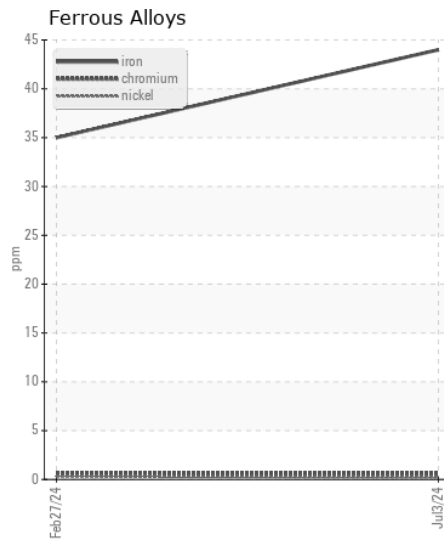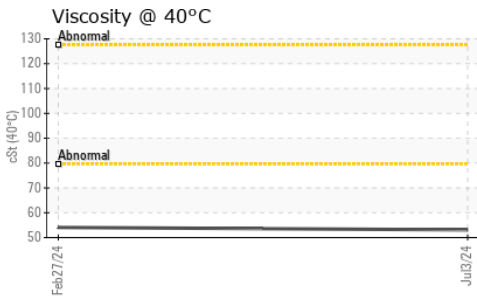

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ASC0009010
Lab Number : 06238595
Unique Number : 11127429
Test Package : CONST

Received : 16 Jul 2024
Tested : 17 Jul 2024
Diagnosed : 17 Jul 2024 - Wes Davis

117 - ASCENDUM MACHINERY INC - GREENVILLE
 2002 N GREENE ST
 GREENVILLE, NC
 US 27834

Contact: ALLEN WILLIAMS
 allen.williams@ascendummachinery.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
 F: (704)494-8197