



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**VOLVO A40G 353408**  
Component  
**Brake Cooling System**  
Fluid  
**TRANSAXLE OIL SAE 75W80 (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>ASC0009005</b>	ASC0008787	---
Sample Date		Client Info		<b>03 Jul 2024</b>	27 Feb 2024	---
Machine Age	hrs	Client Info		<b>2099</b>	1450	---
Oil Age	hrs	Client Info		<b>2099</b>	1450	---
Filter Age	hrs	Client Info		<b>0</b>	0	---
Oil Changed		Client Info		<b>Changed</b>	Not Changd	---
Filter Changed		Client Info		<b>Changed</b>	Not Changd	---
Sample Status				<b>NORMAL</b>	NORMAL	---

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>200	<b>35</b>	34	---
Chromium	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	---
Nickel	ppm	ASTM D5185m	>10	<b>5</b>	5	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
Silver	ppm	ASTM D5185m		<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m		<b>2</b>	2	---
Lead	ppm	ASTM D5185m		<b>0</b>	<1	---
Copper	ppm	ASTM D5185m		<b>83</b>	73	---
Tin	ppm	ASTM D5185m		<b>0</b>	<1	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

### CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m		<b>19</b>	23	---
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	2	---
Water		WC Method	>0.2	<b>NEG</b>	NEG	---
Silt	scalar	*Visual	NONE	<b>LIGHT</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	---

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>4</b>	4	---
Boron	ppm	ASTM D5185m	160	<b>132</b>	122	---
Barium	ppm	ASTM D5185m	10	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m	25	<b>&lt;1</b>	<1	---
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
Magnesium	ppm	ASTM D5185m	12	<b>7</b>	8	---
Calcium	ppm	ASTM D5185m	3750	<b>3488</b>	3586	---
Phosphorus	ppm	ASTM D5185m	1200	<b>1407</b>	1298	---
Zinc	ppm	ASTM D5185m	1500	<b>1515</b>	1516	---
Sulfur	ppm	ASTM D5185m	6000	<b>5703</b>	5286	---
Visc @ 40°C	cSt	ASTM D445	48	<b>40.4</b>	41.4	---

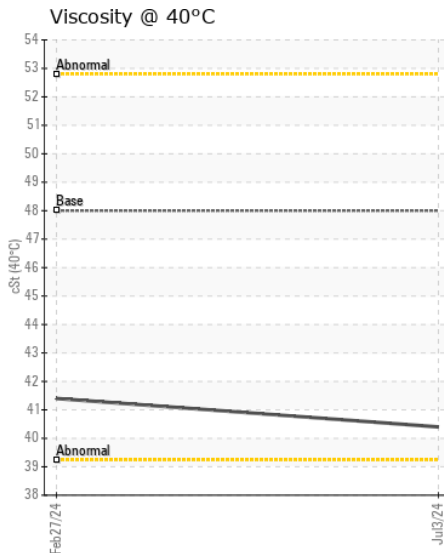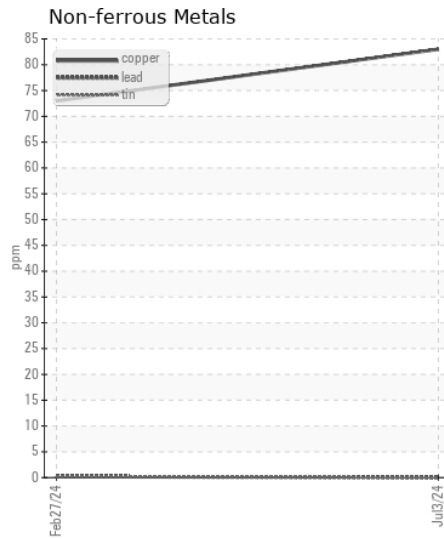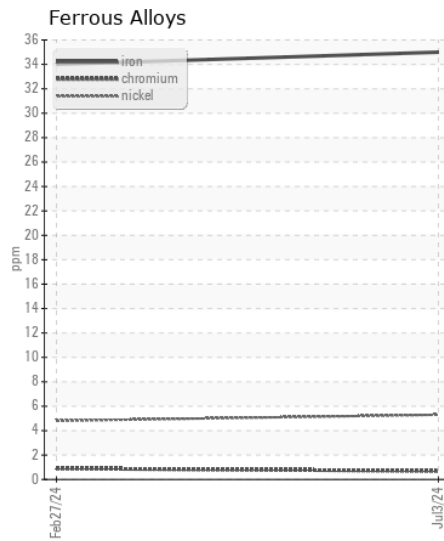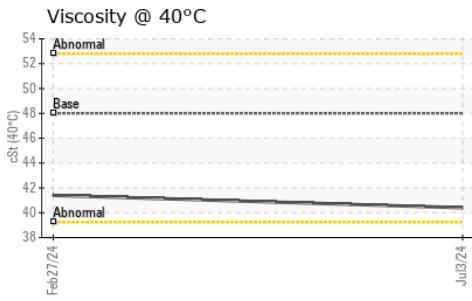

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : ASC0009005  
**Lab Number** : 06238614  
**Unique Number** : 11127448  
**Test Package** : CONST

**Received** : 16 Jul 2024  
**Tested** : 17 Jul 2024  
**Diagnosed** : 18 Jul 2024 - Sean Felton

**117 - ASCENDUM MACHINERY INC - GREENVILLE**  
 2002 N GREENE ST  
 GREENVILLE, NC  
 US 27834

Contact: ALLEN WILLIAMS  
 allen.williams@ascendummachinery.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
 F: (704)494-8197