



# ASCENDUM

## OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**VOLVO A40G 353408**

Component  
**Bogie/Center Axle**

Fluid  
**{not provided} (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

### WEAR

All component wear rates are normal.





### CONTAMINATION

There is no indication of any contamination in the oil.

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>ASC0009008</b>	ASC0008783	---
Sample Date		Client Info		<b>03 Jul 2024</b>	27 Feb 2024	---
Machine Age	hrs	Client Info		<b>2099</b>	1450	---
Oil Age	hrs	Client Info		<b>2099</b>	0	---
Filter Age	hrs	Client Info		<b>0</b>	0	---
Oil Changed		Client Info		<b>N/A</b>	Not Changd	---
Filter Changed		Client Info		<b>N/A</b>	N/A	---
Sample Status				<b>NORMAL</b>	NORMAL	---
Iron	ppm	ASTM D5185m	>500	<b>400</b>	458	---
Chromium	ppm	ASTM D5185m	>10	<b>5</b>	5	---
Nickel	ppm	ASTM D5185m	>10	<b>2</b>	2	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
Silver	ppm	ASTM D5185m		<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>25	<b>2</b>	2	---
Lead	ppm	ASTM D5185m	>25	<b>0</b>	0	---
Copper	ppm	ASTM D5185m	>50	<b>3</b>	4	---
Tin	ppm	ASTM D5185m	>10	<b>0</b>	0	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Silicon	ppm	ASTM D5185m	>75	<b>9</b>	8	---
Potassium	ppm	ASTM D5185m	>20	<b>7</b>	6	---
Water		WC Method	>0.2	<b>NEG</b>	NEG	---
Silt	scalar	*Visual	NONE	<b>MODER</b>	MODER	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	---
Sodium	ppm	ASTM D5185m		<b>1</b>	<1	---
Boron	ppm	ASTM D5185m		<b>219</b>	236	---
Barium	ppm	ASTM D5185m		<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m		<b>3</b>	4	---
Manganese	ppm	ASTM D5185m		<b>13</b>	15	---
Magnesium	ppm	ASTM D5185m		<b>1</b>	1	---
Calcium	ppm	ASTM D5185m		<b>11</b>	92	---
Phosphorus	ppm	ASTM D5185m		<b>2209</b>	2198	---
Zinc	ppm	ASTM D5185m		<b>21</b>	37	---
Sulfur	ppm	ASTM D5185m		<b>25096</b>	25904	---
Visc @ 40°C	cSt	ASTM D445		<b>51.2</b>	52.0	---

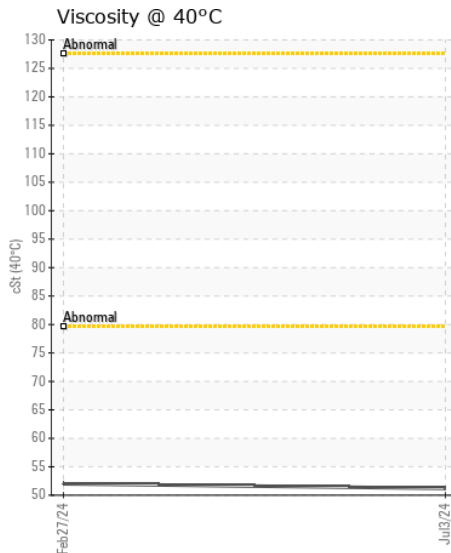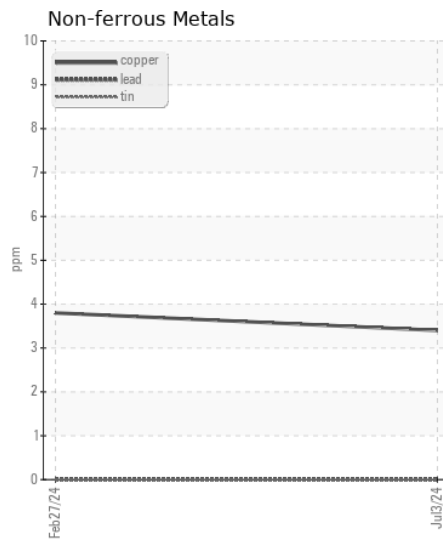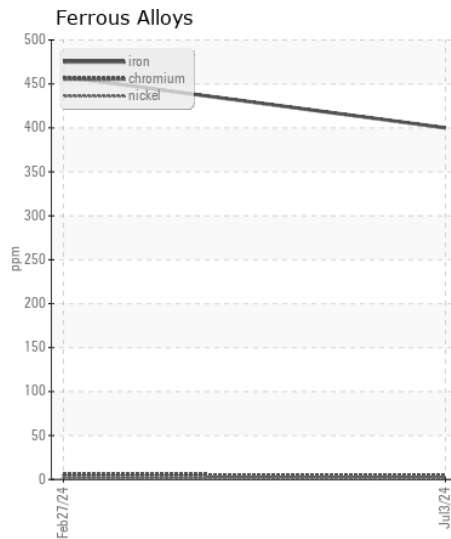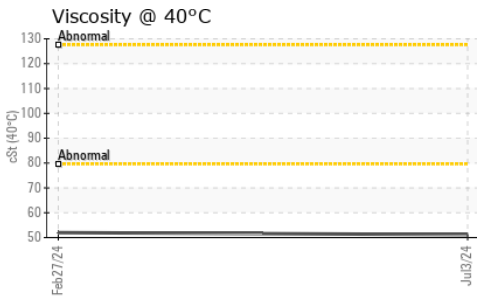

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : ASC0009008  
**Lab Number** : 06238616  
**Unique Number** : 11127450  
**Test Package** : CONST

**Received** : 16 Jul 2024  
**Tested** : 17 Jul 2024  
**Diagnosed** : 17 Jul 2024 - Wes Davis

**117 - ASCENDUM MACHINERY INC - GREENVILLE**  
 2002 N GREENE ST  
 GREENVILLE, NC  
 US 27834

Contact: ALLEN WILLIAMS  
 allen.williams@ascendummachinery.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: (704)494-8197