



ASCENDUM

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
VOLVO A45G 13410 (S/N 752028)
Component
Diesel Engine
Fluid
DIESEL ENGINE OIL SAE 40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ASC0009479	ASC0010165	---
Sample Date		Client Info		28 Jun 2024	06 Apr 2024	---
Machine Age	hrs	Client Info		1616	1616	---
Oil Age	hrs	Client Info		1616	1616	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	N/A	---
Filter Changed		Client Info		Changed	N/A	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	11	8	---
Chromium	ppm	ASTM D5185m	>20	<1	<1	---
Nickel	ppm	ASTM D5185m	>2	4	<1	---
Titanium	ppm	ASTM D5185m		<1	0	---
Silver	ppm	ASTM D5185m	>2	<1	0	---
Aluminum	ppm	ASTM D5185m	>25	2	<1	---
Lead	ppm	ASTM D5185m	>40	<1	0	---
Copper	ppm	ASTM D5185m	>330	11	42	---
Tin	ppm	ASTM D5185m	>15	<1	0	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	4	0	---
Potassium	ppm	ASTM D5185m	>20	2	0	---
Fuel		WC Method	>6.0	<1.0	<1.0	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	0.4	0.5	---
Nitration	Abs/cm	*ASTM D7624	>20	6.8	8.0	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.3	19.5	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>216	0	2	---
Boron	ppm	ASTM D5185m	250	3	<1	---
Barium	ppm	ASTM D5185m	10	<1	0	---
Molybdenum	ppm	ASTM D5185m	100	60	55	---
Manganese	ppm	ASTM D5185m		<1	<1	---
Magnesium	ppm	ASTM D5185m	450	936	874	---
Calcium	ppm	ASTM D5185m	3000	1120	1059	---
Phosphorus	ppm	ASTM D5185m	1150	1152	946	---
Zinc	ppm	ASTM D5185m	1350	1272	1093	---
Sulfur	ppm	ASTM D5185m	4250	2999	2893	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	13.3	15.0	---
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	8.8	6.1	---
Visc @ 100°C	cSt	ASTM D445	14.4	12.7	12.8	---

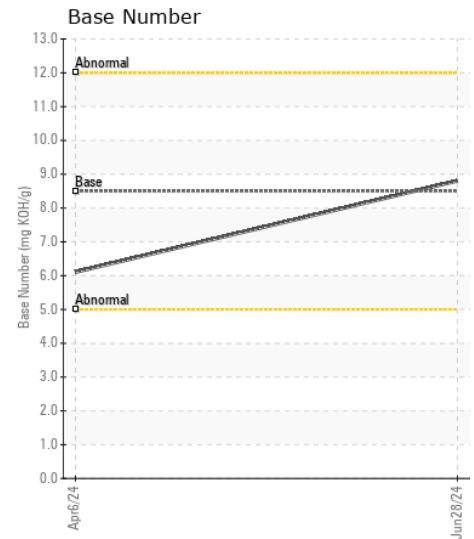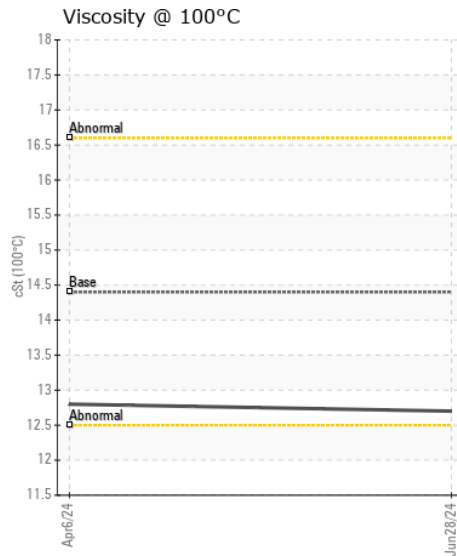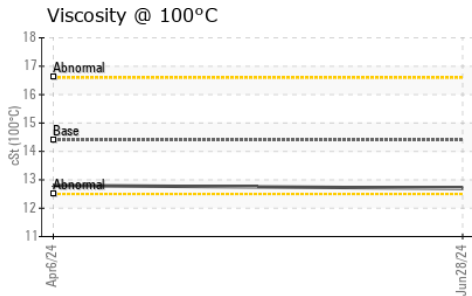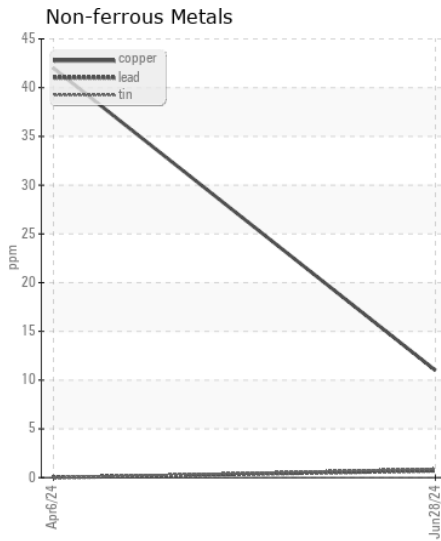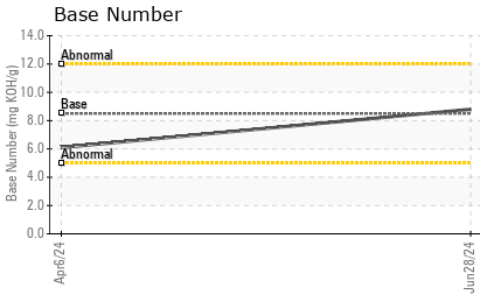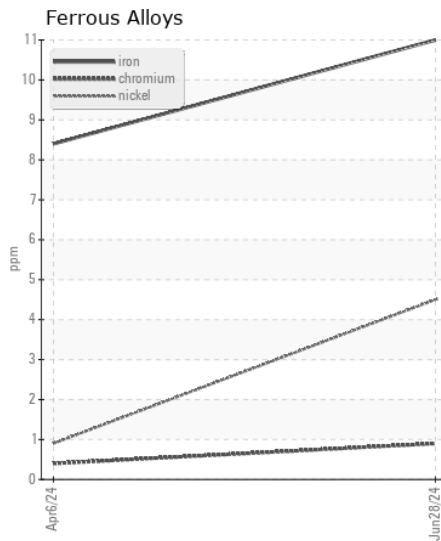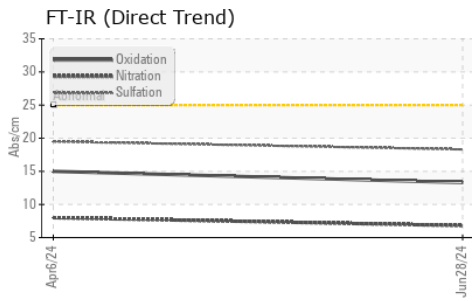

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ASC0009479 **Received** : 16 Jul 2024
Lab Number : 06238651 **Tested** : 17 Jul 2024
Unique Number : 11127485 **Diagnosed** : 18 Jul 2024 - Sean Felton
Test Package : CONST (Additional Tests: TBN)

117 - ASCENDUM MACHINERY INC - GREENVILLE
 2002 N GREENE ST
 GREENVILLE, NC
 US 27834
 Contact: ALLEN WILLIAMS
 allen.williams@ascendummachinery.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: (704)494-8197