



Machine Id
NEWPORT
Component
Starboard Main Engine
Fluid
CHEVRON DELO 710 LS (150 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		MW0062670	MW0062667	MW0062673
Sample Date		Client Info		01 Jul 2024	09 Jun 2024	01 Jun 2024
Machine Age	hrs	Client Info		16723	16223	16068
Oil Age	hrs	Client Info		5000	1423	16068
Filter Age	hrs	Client Info		1200	1423	1200
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd
Filter Changed		Client Info		Not Changd	Changed	Not Changd
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>75	10	8	9
Chromium	ppm	ASTM D5185m	>8	<1	<1	<1
Nickel	ppm	ASTM D5185m	>2	<1	0	0
Titanium	ppm	ASTM D5185m	>3	<1	<1	<1
Silver	ppm	ASTM D5185m	>2	<1	0	0
Aluminum	ppm	ASTM D5185m	>15	2	1	1
Lead	ppm	ASTM D5185m	>18	<1	<1	<1
Copper	ppm	ASTM D5185m	>80	9	6	6
Tin	ppm	ASTM D5185m	>14	1	0	0
Vanadium	ppm	ASTM D5185m		<1	<1	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	3	2	2
Potassium	ppm	ASTM D5185m	>20	2	0	<1
Fuel		WC Method	>4.0	<1.0	<1.0	<1.0
Water		WC Method	>0.1	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844		1	1	1.1
Nitration	Abs/cm	*ASTM D7624	>20	6.4	6.2	6.3
Sulfation	Abs/.1mm	*ASTM D7415	>30	14.9	15.0	15.2
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>75	<1	<1	0
Boron	ppm	ASTM D5185m		42	35	38
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		44	41	45
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		8	37	11
Calcium	ppm	ASTM D5185m		3298	3284	3672
Phosphorus	ppm	ASTM D5185m		20	19	2
Zinc	ppm	ASTM D5185m		0	29	0
Sulfur	ppm	ASTM D5185m		2037	2458	2771
Oxidation	Abs/.1mm	*ASTM D7414	>25	6.2	6.0	6.0
Base Number (BN)	mg KOH/g	ASTM D2896	10.5	6.6	6.6	6.7
Visc @ 100°C	cSt	ASTM D445	15.5	15.0	14.9	15.0

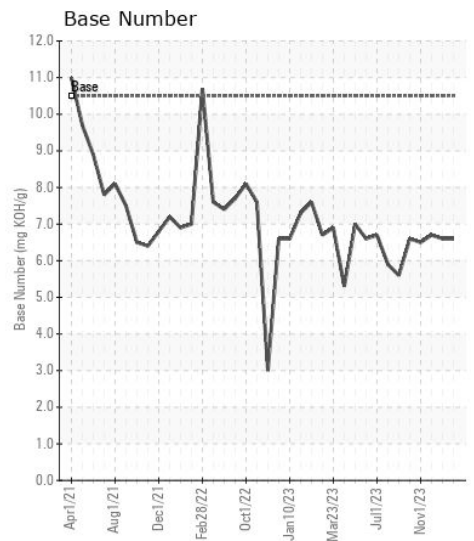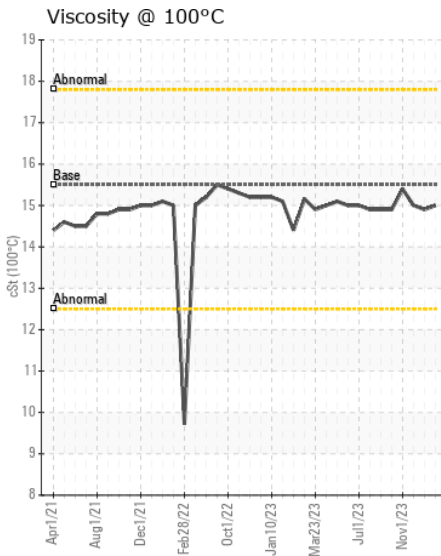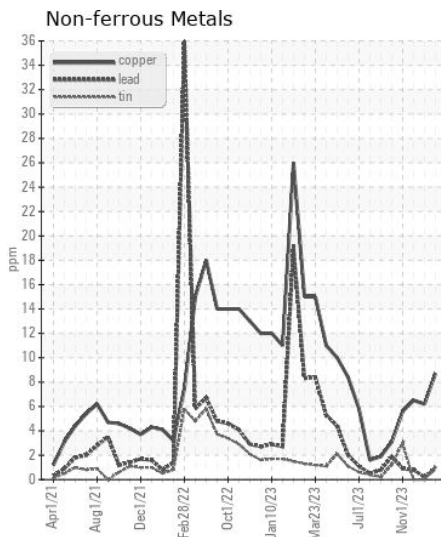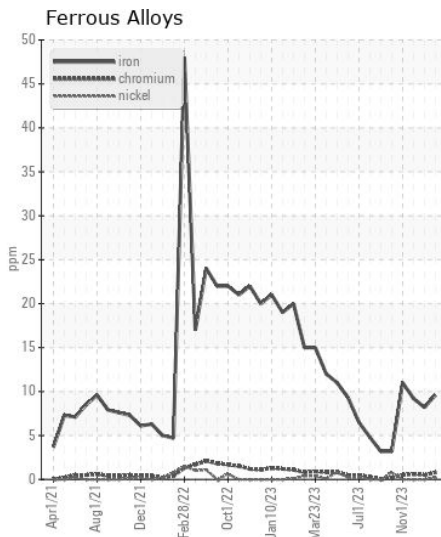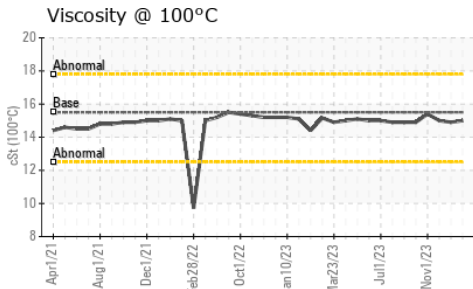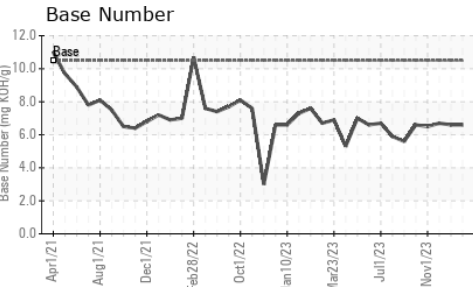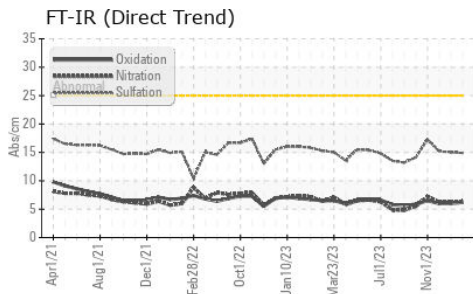

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : MW0062670
Lab Number : 06238718
Unique Number : 11127552
Test Package : MAR 2

C & B MARINE
 50 E RIVERCENTER BLVD, SUITE 1180
 COVINGTON, KY
 US 41011
 Contact: DAVID WESTRICH
 dwestrich@carlislebray.com
 T: (812)290-4063
 F: (859)655-7504

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)