



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
(BD70667)
Machine Id
814029 MACK LR64R
Component
Diesel Engine
Fluid
TIER ONE 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0115226	GFL0115236	GFL0115298
Sample Date		Client Info		08 Jul 2024	20 May 2024	01 May 2024
Machine Age	hrs	Client Info		1602	1343	1201
Oil Age	hrs	Client Info		96	13	23
Filter Age	hrs	Client Info		96	13	23
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	N/A	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>120	22	36	6
Chromium	ppm	ASTM D5185m	>20	1	1	<1
Nickel	ppm	ASTM D5185m	>5	3	<1	1
Titanium	ppm	ASTM D5185m	>2	<1	<1	1
Silver	ppm	ASTM D5185m	>2	<1	1	<1
Aluminum	ppm	ASTM D5185m	>20	2	7	2
Lead	ppm	ASTM D5185m	>40	<1	<1	3
Copper	ppm	ASTM D5185m	>330	54	3	17
Tin	ppm	ASTM D5185m	>15	<1	1	2
Vanadium	ppm	ASTM D5185m		<1	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>25	6	9	4
Potassium	ppm	ASTM D5185m	>20	1	10	3
Fuel		WC Method	>3.0	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>4	0.7	0.5	0.2
Nitration	Abs/cm	*ASTM D7624	>20	9.6	8.5	6.4
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.2	21.4	18.3
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		3	9	4
Boron	ppm	ASTM D5185m		7	4	6
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		58	28	51
Manganese	ppm	ASTM D5185m		<1	<1	1
Magnesium	ppm	ASTM D5185m		861	284	944
Calcium	ppm	ASTM D5185m		1141	1559	1168
Phosphorus	ppm	ASTM D5185m		989	738	1128
Zinc	ppm	ASTM D5185m		1203	1010	1304
Sulfur	ppm	ASTM D5185m		2408	2761	3999
Oxidation	Abs/.1mm	*ASTM D7414	>25	16.9	16.5	13.6
Base Number (BN)	mg KOH/g	ASTM D2896		7.0	7.3	8.4
Visc @ 100°C	cSt	ASTM D445		13.2	13.1	12.9


FT-IR (Direct Trend)

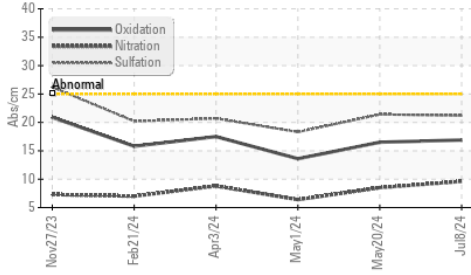


Base Number

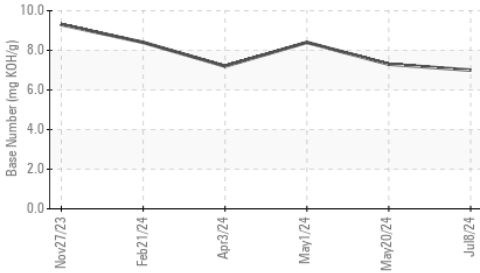


Viscosity @ 100°C

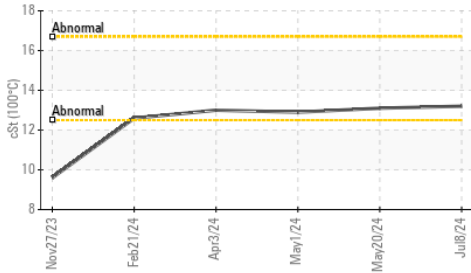


Ferrous Alloys

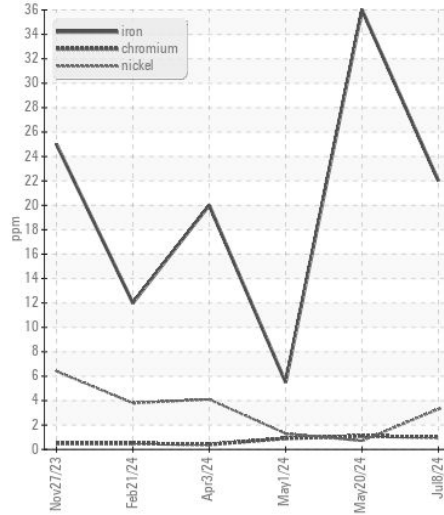


Non-ferrous Metals

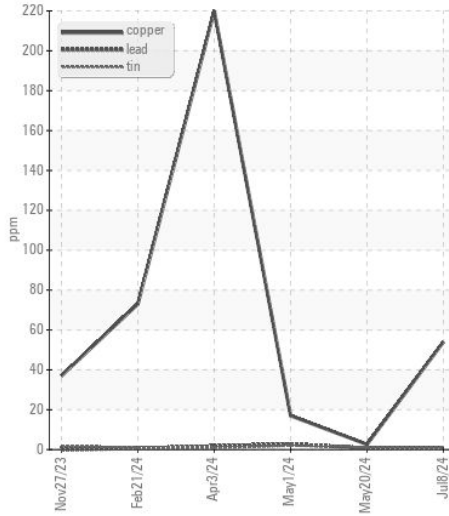

Viscosity @ 100°C

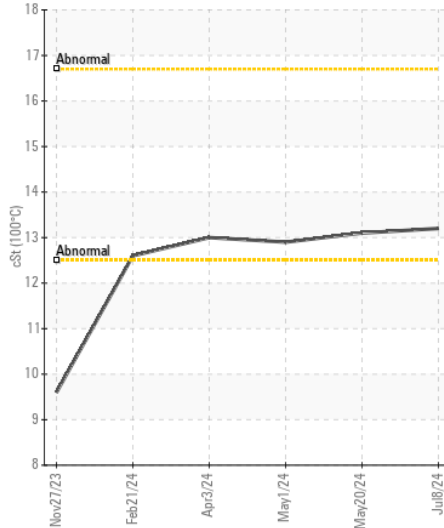

Base Number

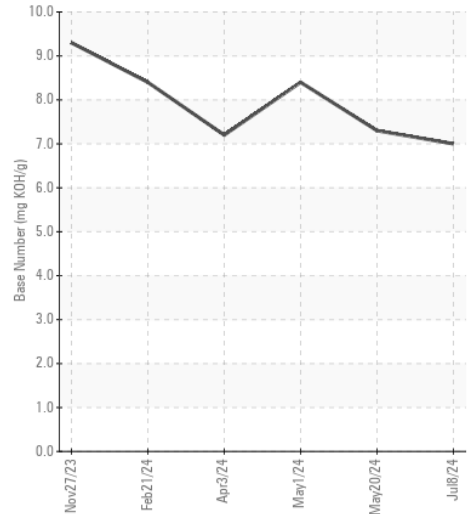

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0115226
Lab Number : 06238742
Unique Number : 11127576
Test Package : FLEET

Received : 16 Jul 2024
Tested : 17 Jul 2024
Diagnosed : 18 Jul 2024 - Sean Felton

GFL Environmental - 642- Grand Rapids Hauling
 5826 Alden Nash Ave SE
 Lowell, MI
 US 49331

Contact: Chad Crosby
 ccrosby@gflenv.com

T: (616)299-8425

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)