

**WEAR** CONTAMINATION **FLUID CONDITION** 


**NORMAL NORMAL NORMAL** 

Machine Id

755722

Component Diesel Engine

ECOMMENDATION	Test	UOM	Method	Limit/Abn	Current	History1	History
Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.	Sample Number		Client Info		RPL06238770		
	Sample Date		Client Info		08 Jul 2024		
	Machine Age	mls	Client Info		33314		
	Oil Age	mls	Client Info		0		
	Filter Age	mls	Client Info		0		
	Oil Changed		Client Info		N/A		
	Filter Changed		Client Info		N/A		
	Sample Status				NORMAL		
/EAR	Iron	ppm	ASTM D5185m	>100	15		
TEAT	Chromium	ppm	ASTM D5185m		<1		
Metal levels are typical for a new component breaking in.	Nickel	ppm	ASTM D5185m		0		
	Titanium	ppm	ASTM D5185m	77	10		
	Silver	ppm	ASTM D5185m	>3	<1		
	Aluminum	ppm	ASTM D5185m		4		
	Lead	ppm	ASTM D5185m		0		
	Copper	ppm	ASTM D5185m		8		
	Tin	ppm	ASTM D5185m		0		
	Vanadium	ppm	ASTM D5185m		<1		
	White Metal	scalar	*Visual	NONE	NONE		
	Yellow Metal	scalar	*Visual	NONE	NONE		
ONTAMINATION	Silicon	nnm	ASTM D5185m	>25	6		
CONTAMINATION	Potassium	ppm	ASTM D5185m		7		
There is no indication of any contamination in the oil.	Fuel	ppm	WC Method				
					<1.0 NEG		
	Water Glycol		WC Method	>0.2	NEG		
	Soot %	%	*ASTM D7844	- 2	0.4		
	Nitration	Abs/cm	*ASTM D7624	>20	11.3		
	Sulfation	Abs/.1mm	*ASTM D7024		26.1		
	Silt	scalar	*Visual	NONE	NONE		
	Debris	scalar	*Visual	NONE	NONE		
	Sand/Dirt	scalar	*Visual	NONE	NONE		
	Appearance	scalar	*Visual	NORML	NORML		
	Odor	scalar	*Visual	NORML	NORML		
	Emulsified Water		*Visual	>0.2	NEG		
			Vioudi				
LUID CONDITION	Sodium	ppm	ASTM D5185m		4		
The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.	Boron	ppm	ASTM D5185m		26		
	Barium	ppm	ASTM D5185m		0		
	Molybdenum	ppm	ASTM D5185m		62		
	Manganese	ppm	ASTM D5185m		2		
	Magnesium	ppm	ASTM D5185m		711		
	Calcium	ppm	ASTM D5185m		1527		
	Phosphorus	ppm	ASTM D5185m		709		
	Zinc	ppm	ASTM D5185m		844		
	Sulfur	ppm	ASTM D5185m		3160		
	Oxidation	Abs/.1mm	*ASTM D7414	>25	24.5		
	Base Number (BN)	mg KOH/g	ASTM D2896		4.4		
	Visc @ 100°C	cSt	ASTM D445		14.7		

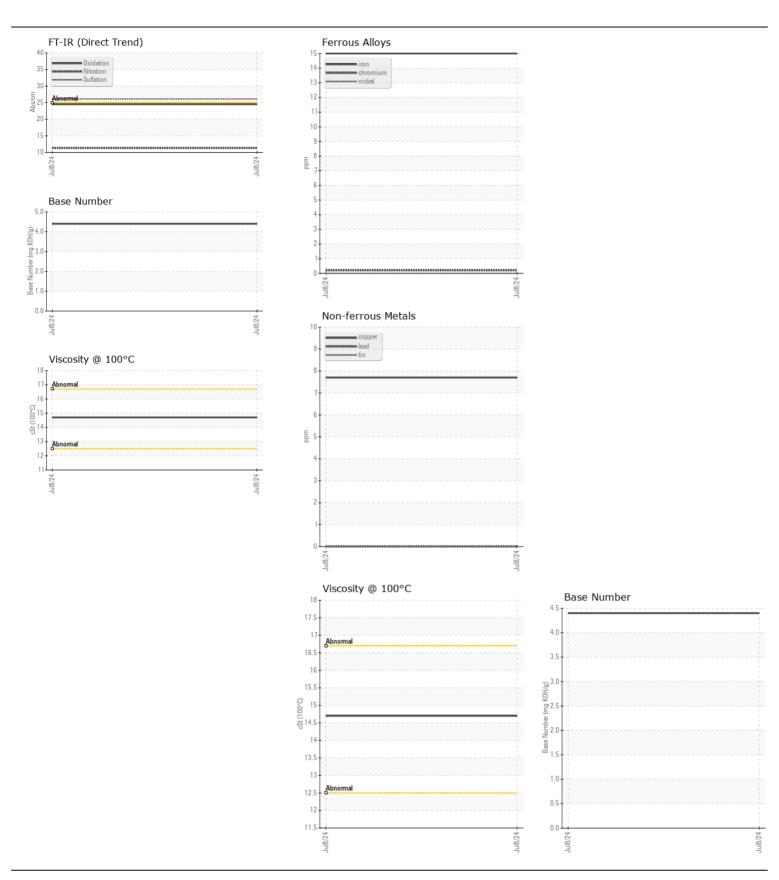





Certificate L2367

Laboratory

Sample No.

: RPL06238770 Lab Number : 06238770 Unique Number : 11127604 Test Package : FLEET

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 17 Jul 2024 **Tested** 

: 18 Jul 2024 Diagnosed : 18 Jul 2024 - Wes Davis

RTL PACLEASE - 7050 -Leasing Tyler

10791 Hwy 69 North Tyler, TX

US 75706 Contact: Justin Cooper

CooperJ1@RushEnterprises.Com T: (903)405-3000

To discuss this sample report, contact Customer Service at 1-800-237-1369. \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)