



**LEAHY-WOLF**  
Lubricating specialists since 1946

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

**Rentals**

Machine Id

**CB229 Sany SY500 SY0507CC01208**

Component

**Diesel Engine**

Fluid

**DIESEL ENGINE OIL SAE 15W40 (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LW0009132	---	---
Sample Date		Client Info		12 Jul 2024	---	---
Machine Age	hrs	Client Info		474	---	---
Oil Age	hrs	Client Info		474	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Not Changd	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

**WEAR**

Metal levels are typical for a components first oil change.

Iron	ppm	ASTM D5185m	>100	16	---	---
Chromium	ppm	ASTM D5185m	>20	<1	---	---
Nickel	ppm	ASTM D5185m	>4	0	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m	>3	0	---	---
Aluminum	ppm	ASTM D5185m	>20	3	---	---
Lead	ppm	ASTM D5185m	>40	0	---	---
Copper	ppm	ASTM D5185m	>330	11	---	---
Tin	ppm	ASTM D5185m	>15	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

**CONTAMINATION**












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	6	---	---
Potassium	ppm	ASTM D5185m	>20	3	---	---
Fuel		WC Method	>5	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>3	0.1	---	---
Nitration	Abs/cm	*ASTM D7624	>20	7.7	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.5	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

**FLUID CONDITION**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>158	4	---	---
Boron	ppm	ASTM D5185m	250	10	---	---
Barium	ppm	ASTM D5185m	10	1	---	---
Molybdenum	ppm	ASTM D5185m	100	59	---	---
Manganese	ppm	ASTM D5185m		3	---	---
Magnesium	ppm	ASTM D5185m	450	861	---	---
Calcium	ppm	ASTM D5185m	3000	1139	---	---
Phosphorus	ppm	ASTM D5185m	1150	1017	---	---
Zinc	ppm	ASTM D5185m	1350	1244	---	---
Sulfur	ppm	ASTM D5185m	4250	3538	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	16.2	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	9.1	---	---
Visc @ 100°C	cSt	ASTM D445	14.4	13.8	---	---

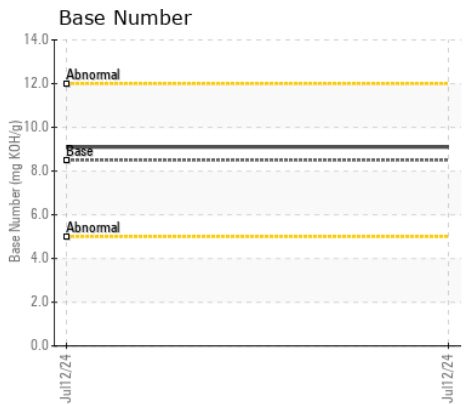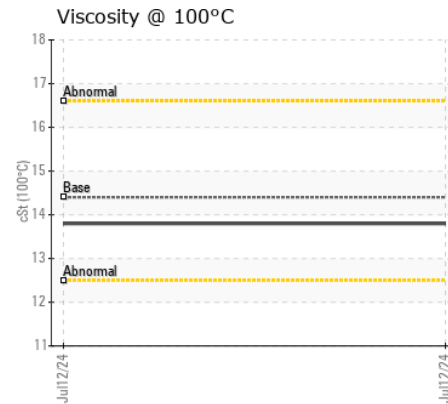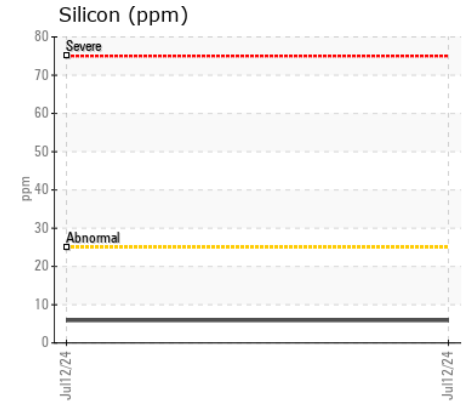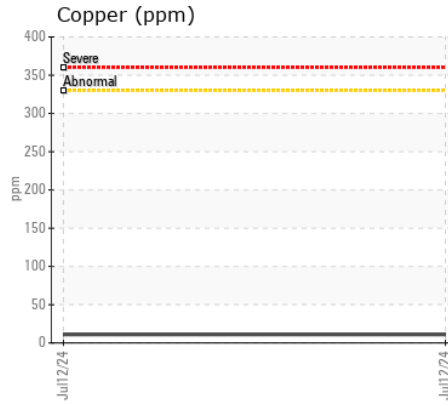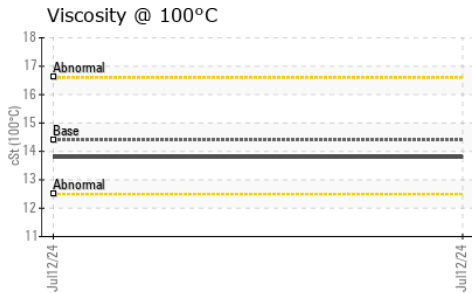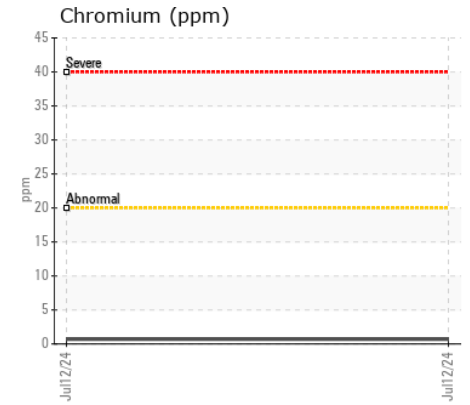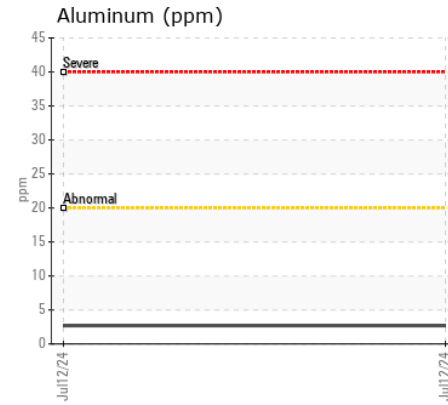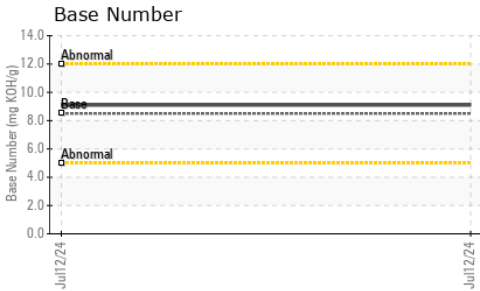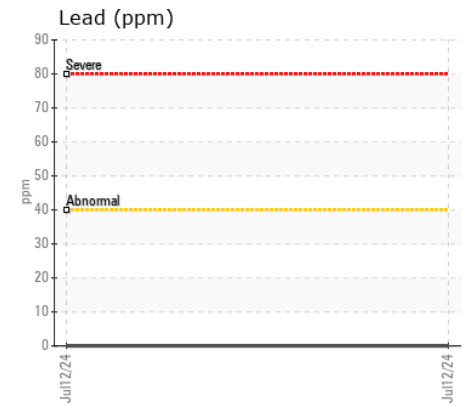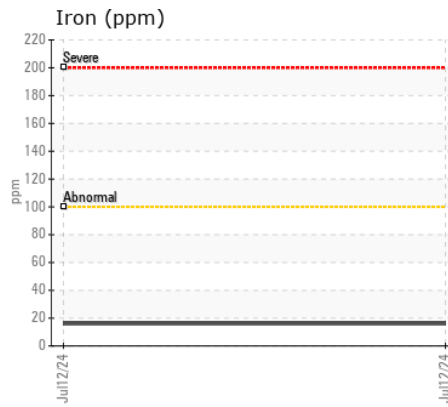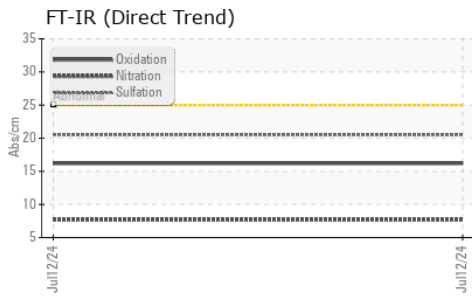

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : LW0009132 Received : 17 Jul 2024  
 Lab Number : 06238793 Tested : 17 Jul 2024  
 Unique Number : 11127627 Diagnosed : 17 Jul 2024 - Wes Davis  
 Test Package : MOB 1 ( Additional Tests: TBN )

**CHICAGO MACHINERY INC**  
 3142 EAST LINCOLN  
 LYNWOOD, IL  
 US 60411-7728  
 Contact: Mike Korbek  
 mike@chicagomachineryinc.com  
 T: (708)758-2060  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)