



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 1DW648LBRNF715341
 Component
Diesel Engine
 Fluid
JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0142343	JR0142345	JR0142341
Sample Date		Client Info		06 Jul 2024	03 Jun 2024	23 Jan 2024
Machine Age	hrs	Client Info		2500	2000	1500
Oil Age	hrs	Client Info		500	500	500
Filter Age	hrs	Client Info		500	500	500
Oil Changed		Client Info		Changed	Changed	N/A
Filter Changed		Client Info		N/A	N/A	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>51	11	5	12
Chromium	ppm	ASTM D5185m	>11	<1	0	<1
Nickel	ppm	ASTM D5185m	>5	1	<1	1
Titanium	ppm	ASTM D5185m		<1	0	<1
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>31	4	4	4
Lead	ppm	ASTM D5185m	>26	<1	0	0
Copper	ppm	ASTM D5185m	>26	3	1	18
Tin	ppm	ASTM D5185m	>4	<1	<1	<1
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>22	9	7	10
Potassium	ppm	ASTM D5185m	>20	4	1	10
Fuel		WC Method	>2.1	<1.0	<1.0	<1.0
Water		WC Method	>0.21	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.5	0.3	0.5
Nitration	Abs/cm	*ASTM D7624	>20	9.1	8.4	9.4
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.6	21.1	21.8
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.21	NEG	NEG	NEG

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>31	0	3	0
Boron	ppm	ASTM D5185m		158	257	192
Barium	ppm	ASTM D5185m		2	0	0
Molybdenum	ppm	ASTM D5185m		264	247	265
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		797	783	783
Calcium	ppm	ASTM D5185m		1427	1335	1419
Phosphorus	ppm	ASTM D5185m		927	896	888
Zinc	ppm	ASTM D5185m		1105	1023	1091
Sulfur	ppm	ASTM D5185m		3039	3317	3251
Oxidation	Abs/.1mm	*ASTM D7414	>25	16.3	16.4	16.1
Base Number (BN)	mg KOH/g	ASTM D2896	13.6	8.4	8.8	8.8
Visc @ 100°C	cSt	ASTM D445	15.4	13.4	13.7	13.7


FT-IR (Direct Trend)

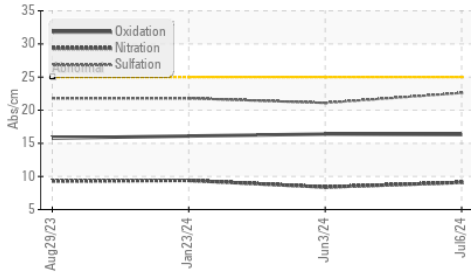


Ferrous Alloys

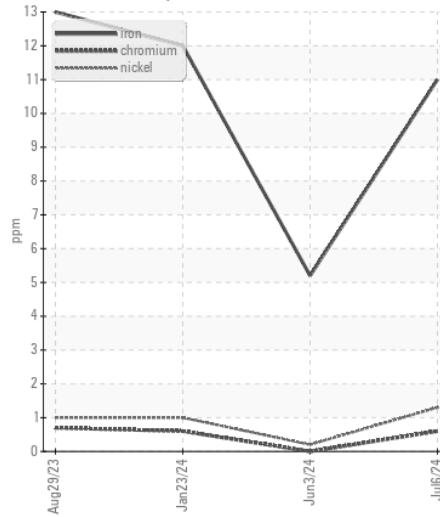


Base Number

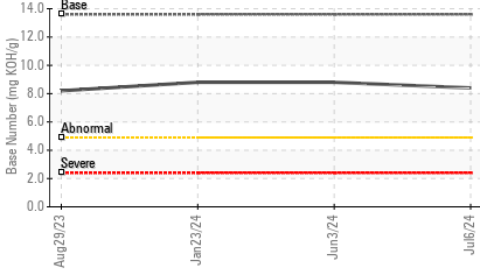


Non-ferrous Metals

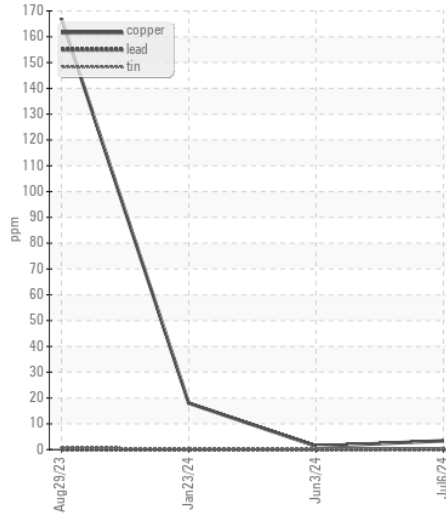


Viscosity @ 100°C

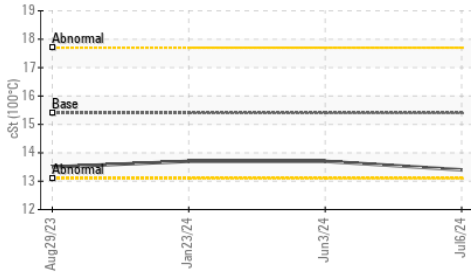

Viscosity @ 100°C

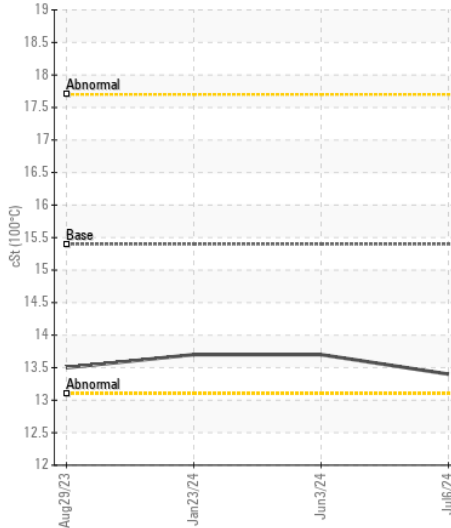

Base Number

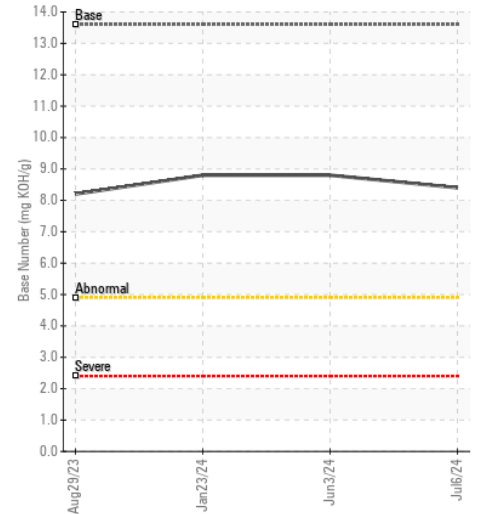

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : JR0142343 Received : 17 Jul 2024
 Lab Number : 06238997 Tested : 18 Jul 2024
 Unique Number : 11127831 Diagnosed : 18 Jul 2024 - Wes Davis
 Test Package : CONST (Additional Tests: TBN)

WILKERSON LOGGING INC
 4815 TRIPLE W FARM RD
 HICKORY GROVE, SC
 US 29717
 Contact: Service Manager
 wilkersonlogging3@yahoo.com
 T: (803)417-3337
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)