



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**JOHN DEERE 1T0750LXPLF387902**  
 Component  
**Hydraulic System**  
 Fluid  
**JOHN DEERE HYDRAU (--- QTS)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0225579</b>	JR0211014	JR0183905
Sample Date		Client Info		<b>16 Jul 2024</b>	29 Mar 2024	29 Aug 2023
Machine Age	hrs	Client Info		<b>4412</b>	3923	3442
Oil Age	hrs	Client Info		<b>489</b>	3923	3442
Filter Age	hrs	Client Info		<b>489</b>	0	1500
Oil Changed		Client Info		<b>Not Chngd</b>	Changed	Not Chngd
Filter Changed		Client Info		<b>Not Chngd</b>	Changed	Not Chngd
Sample Status				<b>NORMAL</b>	ATTENTION	NORMAL

### WEAR

All component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
PQ		ASTM D8184		<b>16</b>	15	11
Iron	ppm	ASTM D5185m	>20	<b>4</b>	8	6
Chromium	ppm	ASTM D5185m	>10	<b>&lt;1</b>	2	<1
Nickel	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m		<b>0</b>	0	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>10	<b>1</b>	3	2
Lead	ppm	ASTM D5185m	>10	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>75	<b>&lt;1</b>	1	1
Tin	ppm	ASTM D5185m	>10	<b>0</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION











The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Silicon	ppm	ASTM D5185m	>20	<b>3</b>	5	4
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	1	0
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Particles >4µm		ASTM D7647	>5000	<b>1191</b>	7162	996
Particles >6µm		ASTM D7647	>1300	<b>258</b>	131	143
Particles >14µm		ASTM D7647	>160	<b>21</b>	5	16
Particles >21µm		ASTM D7647	>40	<b>5</b>	1	6
Particles >38µm		ASTM D7647	>10	<b>0</b>	0	1
Particles >71µm		ASTM D7647	>3	<b>0</b>	0	0
Oil Cleanliness		ISO 4406 (c)	>19/17/14	<b>17/15/12</b>	20/14/10	17/14/11
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>LIGHT</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG

### FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>&lt;1</b>	2	1
Boron	ppm	ASTM D5185m		<b>4</b>	15	16
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>3</b>	16	16
Manganese	ppm	ASTM D5185m		<b>0</b>	0	0
Magnesium	ppm	ASTM D5185m		<b>31</b>	84	84
Calcium	ppm	ASTM D5185m	87	<b>405</b>	770	770
Phosphorus	ppm	ASTM D5185m	727	<b>668</b>	594	565
Zinc	ppm	ASTM D5185m	900	<b>830</b>	719	694
Sulfur	ppm	ASTM D5185m	1500	<b>2085</b>	2321	2176
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	<b>0.65</b>	0.65	0.71
Visc @ 40°C	cSt	ASTM D445	65	<b>57.5</b>	55.5	54.9

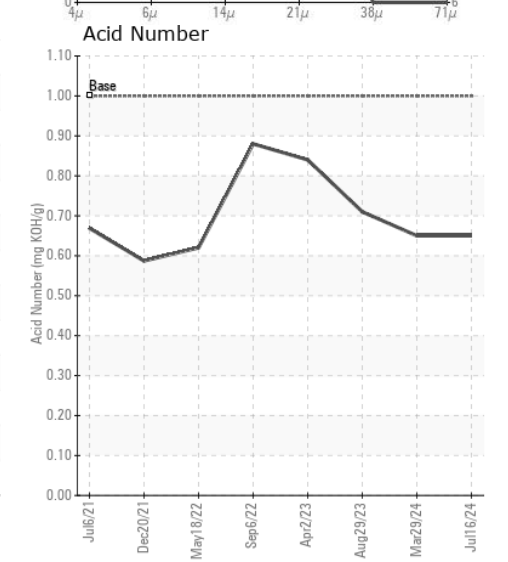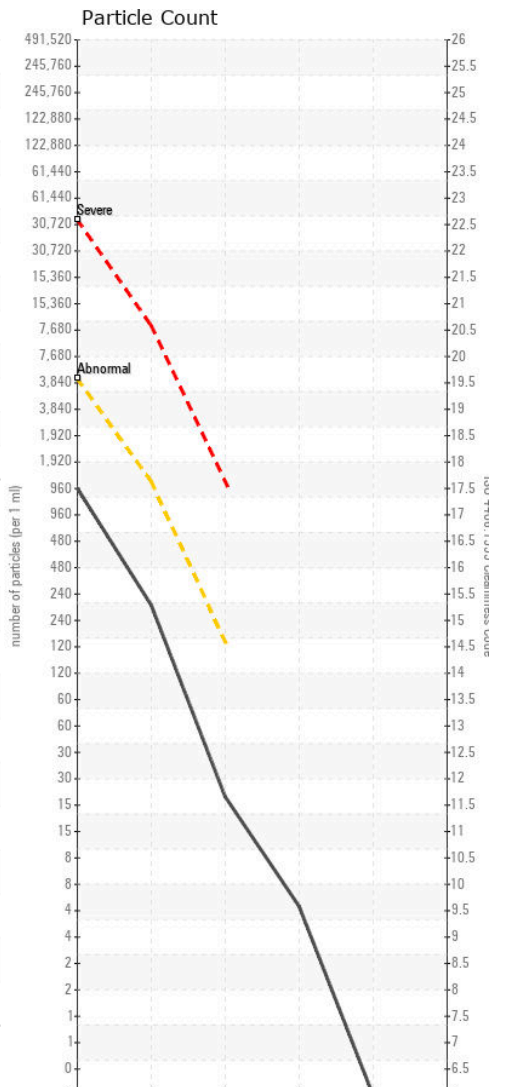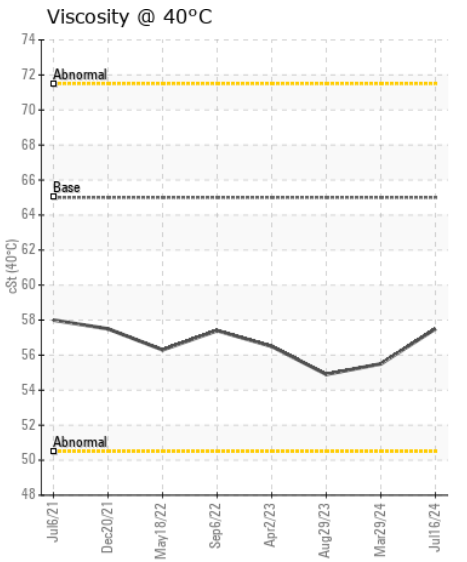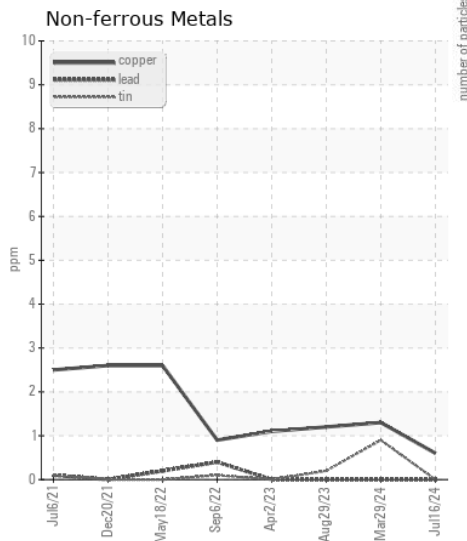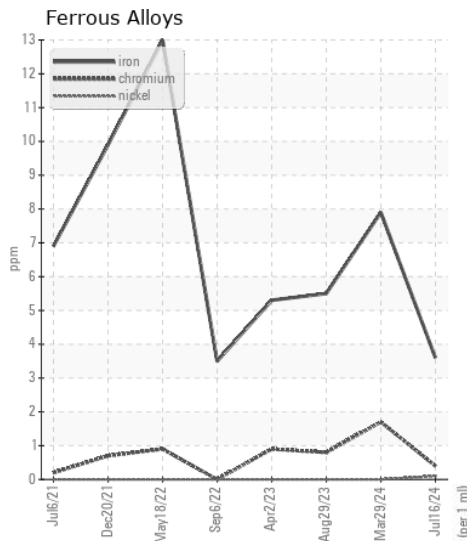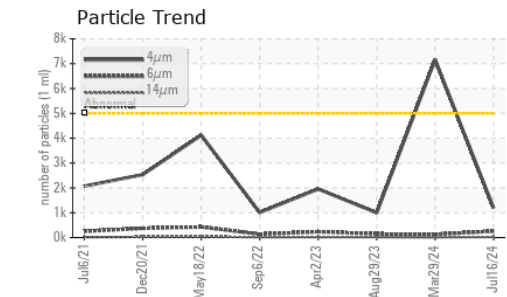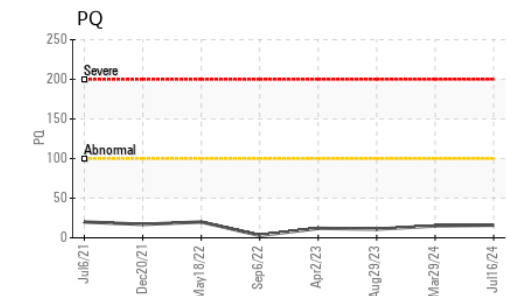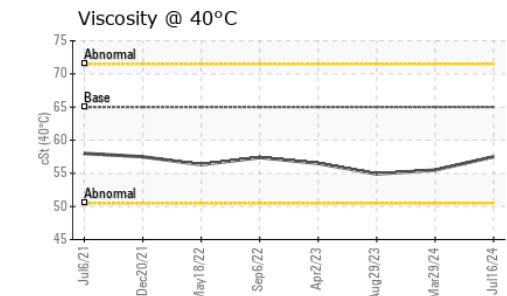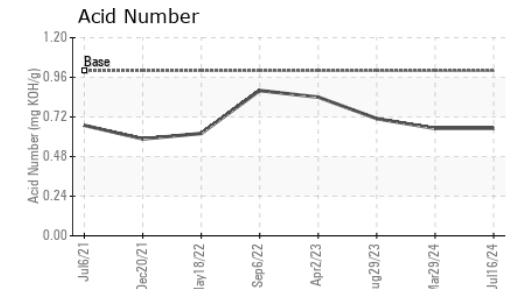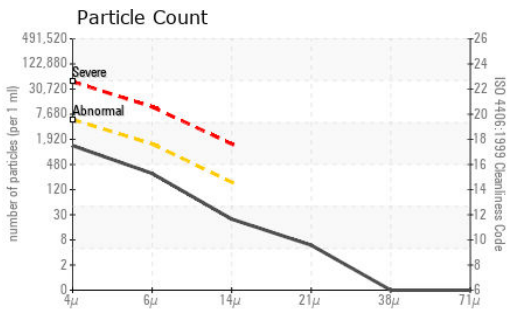

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0225579 **Received** : 17 Jul 2024  
**Lab Number** : 06239038 **Tested** : 18 Jul 2024  
**Unique Number** : 11127872 **Diagnosed** : 18 Jul 2024 - Wes Davis  
**Test Package** : CONST ( Additional Tests: PQ )

**CWS-STRITTMATTER**  
 9102 OWENS DR  
 MANASSAS PARK, VA  
 US 20111  
 Contact: EDDIE GARRETSON  
 egarretson@strittmattercompanies.com  
 T: (703)335-2255  
 F: (703)335-8095

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)