



WEAR	NORMAL
CONTAMINATION	ATTENTION
FLUID CONDITION	NORMAL

Area
[BILLY MCCORMICK]

Machine Id
JOHN DEERE 948L-II 1DW948LBCMF710777

Component
Hydraulic System

Fluid
{not provided} (--- GAL)

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0222068	JR0165006	---
Sample Date		Client Info		08 Jul 2024	01 Nov 2023	---
Machine Age	hrs	Client Info		4841	3889	---
Oil Age	hrs	Client Info		0	3889	---
Filter Age	hrs	Client Info		0	3889	---
Oil Changed		Client Info		N/A	N/A	---
Filter Changed		Client Info		N/A	N/A	---
Sample Status				ATTENTION	ABNORMAL	---

WEAR

All component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
Iron	ppm	ASTM D5185m	>20	8	6	---
Chromium	ppm	ASTM D5185m	>10	3	3	---
Nickel	ppm	ASTM D5185m	>10	0	0	---
Titanium	ppm	ASTM D5185m		0	0	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>10	1	<1	---
Lead	ppm	ASTM D5185m	>10	0	<1	---
Copper	ppm	ASTM D5185m	>75	2	4	---
Tin	ppm	ASTM D5185m	>10	0	0	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION











There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

Silicon	ppm	ASTM D5185m	>20	6	5	---
Potassium	ppm	ASTM D5185m	>20	2	2	---
Water		WC Method	>0.1	NEG	NEG	---
Particles >4µm		ASTM D7647	>5000	5055	▲ 15962	---
Particles >6µm		ASTM D7647	>1300	1078	▲ 3292	---
Particles >14µm		ASTM D7647	>160	58	160	---
Particles >21µm		ASTM D7647	>40	14	27	---
Particles >38µm		ASTM D7647	>10	1	0	---
Particles >71µm		ASTM D7647	>3	0	0	---
Oil Cleanliness		ISO 4406 (c)	>19/17/14	20/17/13	▲ 21/19/14	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	---

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oils additive package is suitable for further service.

Sodium	ppm	ASTM D5185m		2	1	---
Boron	ppm	ASTM D5185m		0	0	---
Barium	ppm	ASTM D5185m		0	0	---
Molybdenum	ppm	ASTM D5185m		0	0	---
Manganese	ppm	ASTM D5185m		0	<1	---
Magnesium	ppm	ASTM D5185m		6	4	---
Calcium	ppm	ASTM D5185m		179	218	---
Phosphorus	ppm	ASTM D5185m		561	611	---
Zinc	ppm	ASTM D5185m		698	801	---
Sulfur	ppm	ASTM D5185m		1985	1686	---
Acid Number (AN)	mg KOH/g	ASTM D8045		0.61	0.71	---
Visc @ 40°C	cSt	ASTM D445		51.9	54.0	---

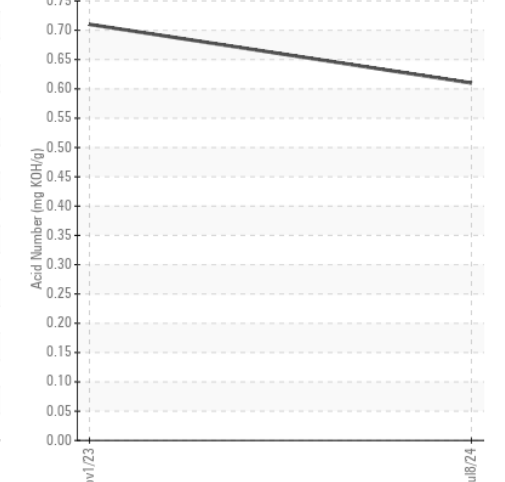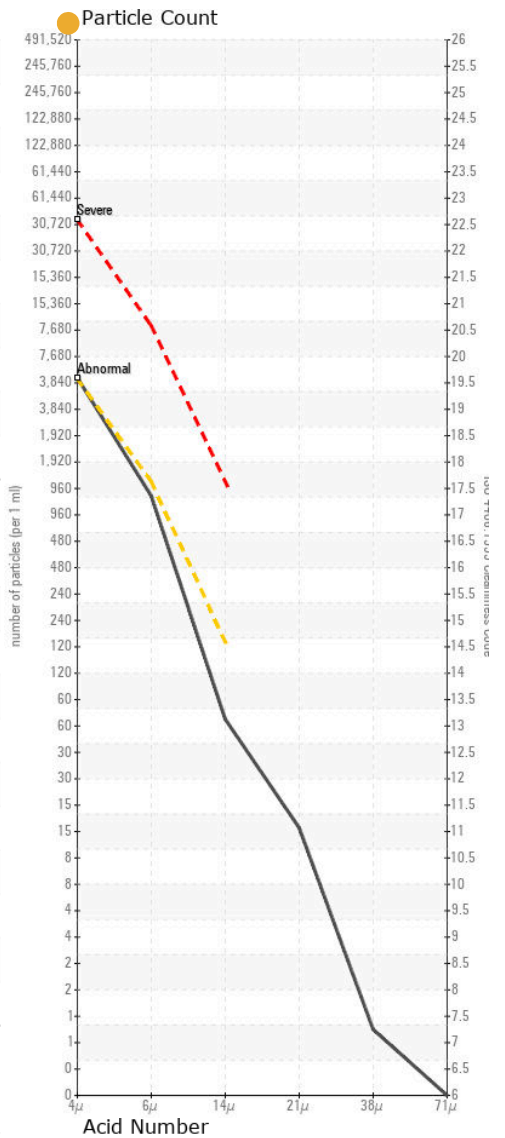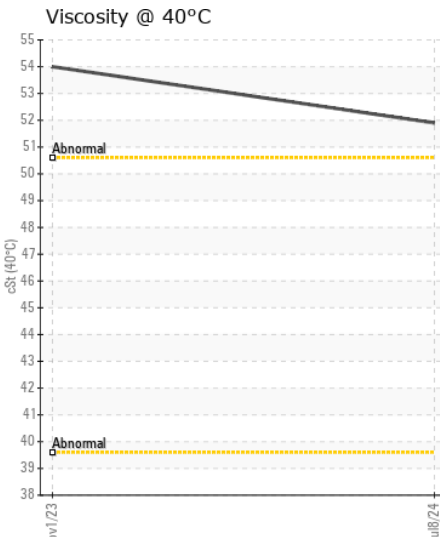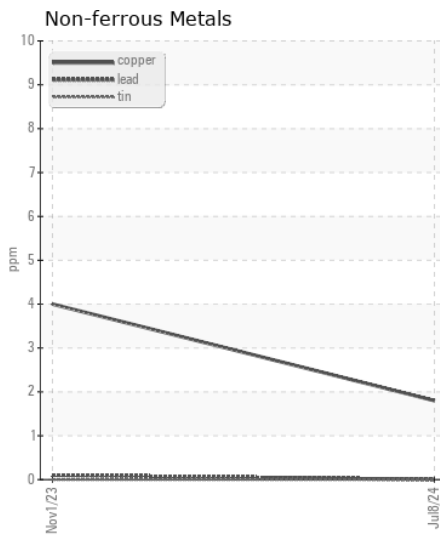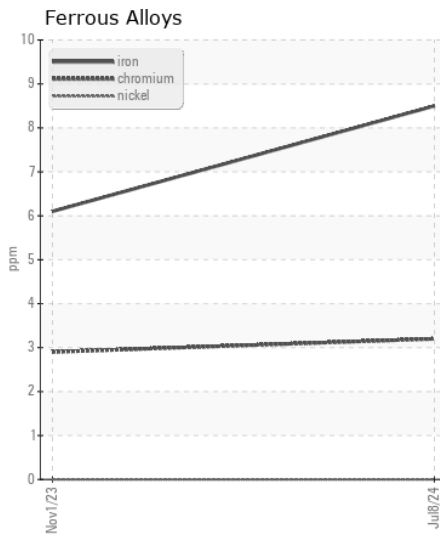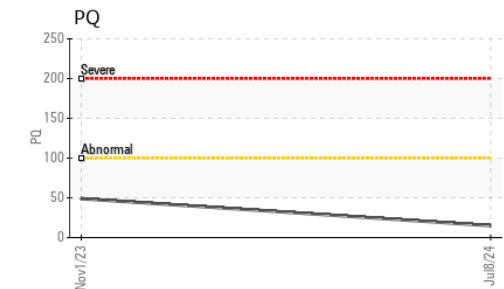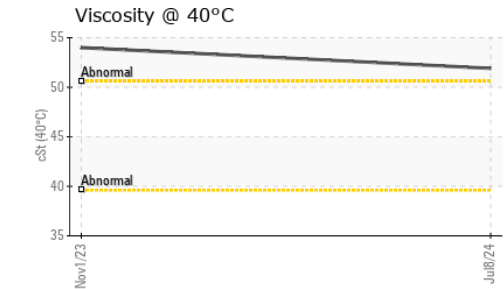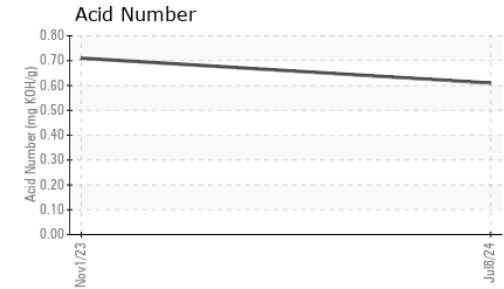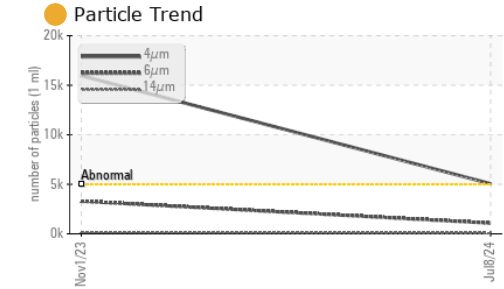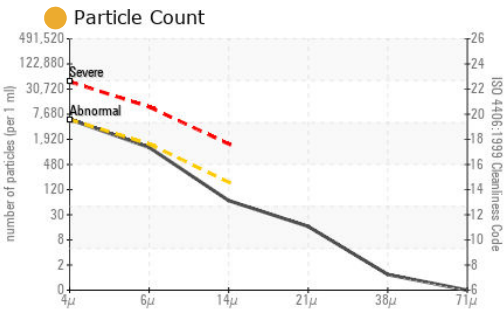

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0222068 **Received** : 17 Jul 2024
Lab Number : 06239048 **Tested** : 18 Jul 2024
Unique Number : 11127882 **Diagnosed** : 18 Jul 2024 - Don Baldridge
Test Package : CONST (Additional Tests: PQ)

JRE - GARNER
 4161 AUBURN CHURCH RD
 GARNER, NC
 US 27529

Contact: RALEIGH SHOP
 sean.betts@jamesriverequipment.com; catherine.anastasio@wearcheck.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (919)614-2260
 F: (919)779-5432