



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 844L 1DW844LXHNL714031
 Component
Hydraulic System
 Fluid
JOHN DEERE HYDRAU (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WE0007447	WE0005245	WE0005260
Sample Date		Client Info		12 Jul 2024	01 Apr 2024	07 Mar 2024
Machine Age	hrs	Client Info		15954	13745	13177
Oil Age	hrs	Client Info		8000	1740	500
Filter Age	hrs	Client Info		1000	1740	500
Oil Changed		Client Info		Changed	Not Changd	Not Changd
Filter Changed		Client Info		Changed	Not Changd	Not Changd
Sample Status				NORMAL	NORMAL	ATTENTION

WEAR

All component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
PQ		ASTM D8184		15	16	14
Iron	ppm	ASTM D5185m	>20	5	3	2
Chromium	ppm	ASTM D5185m	>10	4	3	2
Nickel	ppm	ASTM D5185m	>10	0	<1	0
Titanium	ppm	ASTM D5185m		0	<1	<1
Silver	ppm	ASTM D5185m		0	0	<1
Aluminum	ppm	ASTM D5185m	>10	0	2	0
Lead	ppm	ASTM D5185m	>10	0	<1	2
Copper	ppm	ASTM D5185m	>75	<1	2	1
Tin	ppm	ASTM D5185m	>10	0	<1	<1
Vanadium	ppm	ASTM D5185m		0	<1	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION











The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Silicon	ppm	ASTM D5185m	>20	2	2	<1
Potassium	ppm	ASTM D5185m	>20	0	2	2
Water		WC Method	>0.1	NEG	NEG	NEG
Particles >4µm		ASTM D7647	>5000	594	688	2986
Particles >6µm		ASTM D7647	>1300	176	229	1348
Particles >14µm		ASTM D7647	>160	25	24	177
Particles >21µm		ASTM D7647	>40	7	8	44
Particles >38µm		ASTM D7647	>10	1	1	3
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>19/17/14	16/15/12	17/15/12	19/18/15
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	LIGHT	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		4	2	4
Boron	ppm	ASTM D5185m		<1	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	<1	<1
Manganese	ppm	ASTM D5185m		0	<1	<1
Magnesium	ppm	ASTM D5185m		7	4	0
Calcium	ppm	ASTM D5185m	87	810	196	195
Phosphorus	ppm	ASTM D5185m	727	755	595	633
Zinc	ppm	ASTM D5185m	900	916	813	733
Sulfur	ppm	ASTM D5185m	1500	2410	1655	1793
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.85	0.62	0.64
Visc @ 40°C	cSt	ASTM D445	65	52.5	62.1	57.5

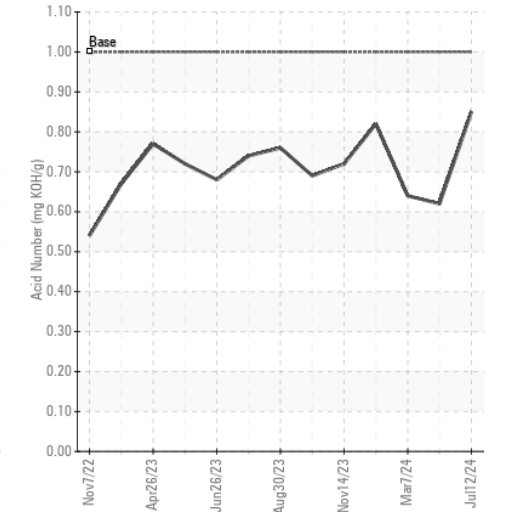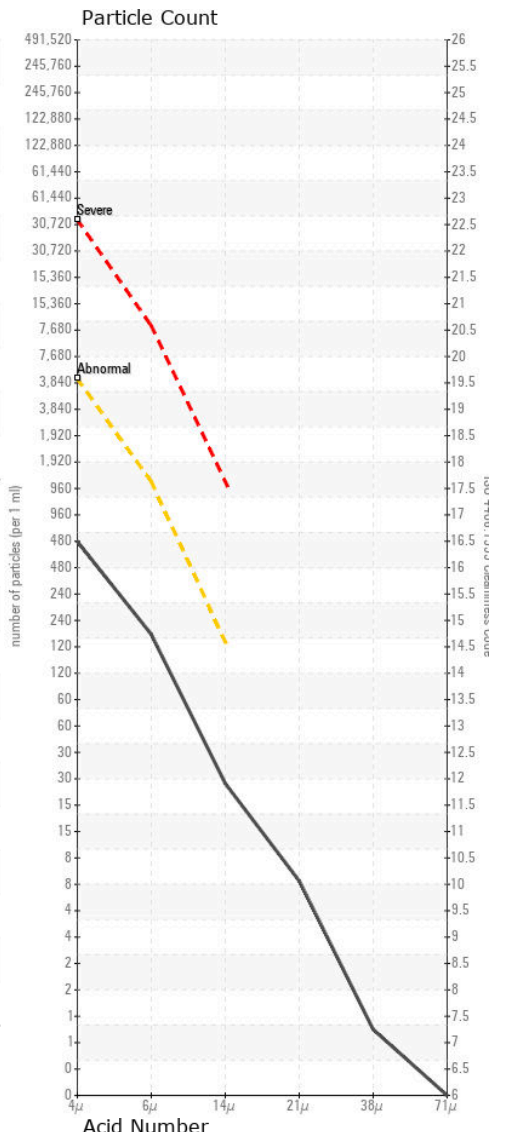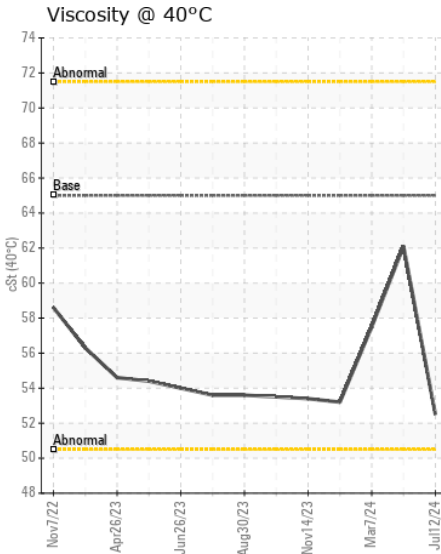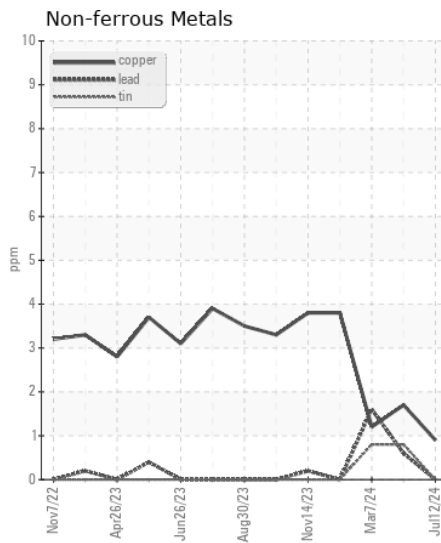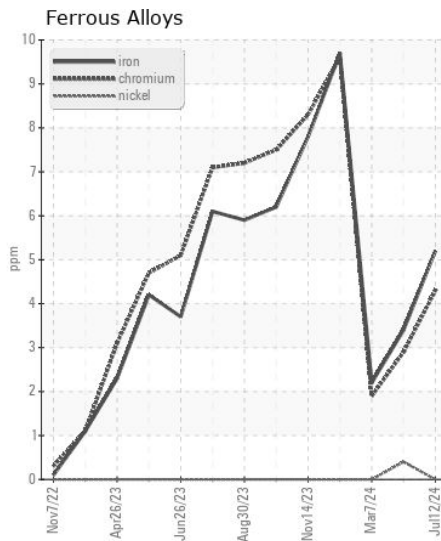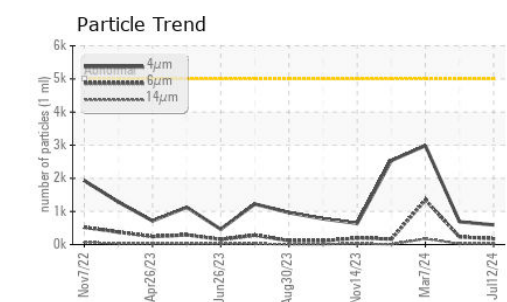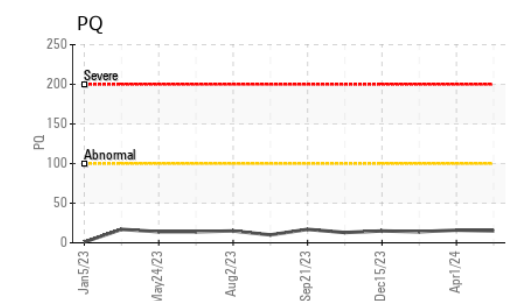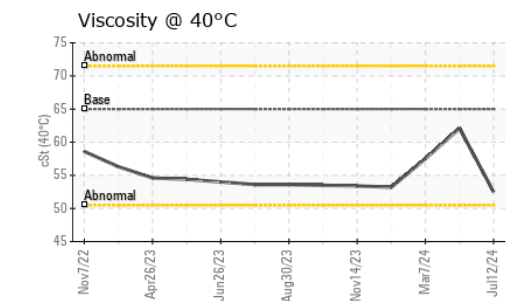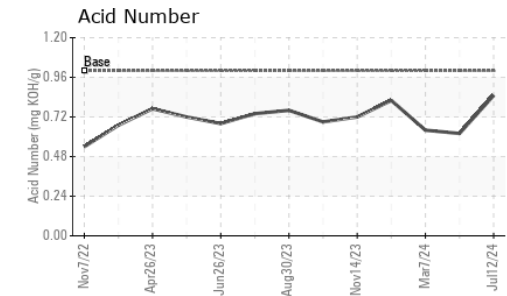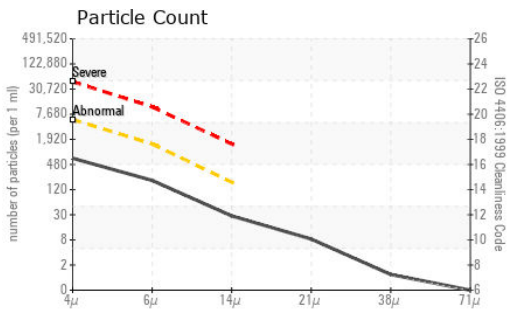

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WE0007447 **Received** : 17 Jul 2024
Lab Number : 06239077 **Tested** : 18 Jul 2024
Unique Number : 11127911 **Diagnosed** : 18 Jul 2024 - Wes Davis
Test Package : CONST (Additional Tests: PQ)

WARRIOR TRACTOR AND EQUIPMENT - MONROEVILLE
 66 INDUSTRIAL PARK DR
 MONROEVILLE, AL
 US 36460
 Contact: SCOTT WILLIAMSON
 swilliamson@warriortractor.com
 T: (251)575-7111
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)